14 Watt LED Drop Light/Task Light with Hanging Hooks
25' Cord - 3' Tube - LED Shelter Light
Instruction Manual

Do not attempt installation until you are familiar with all warnings, precautions, and procedures outlined within this instruction sheet.

WARNING:

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
CRITICAL SAFETY INSTRUCTIONS:

- Risk of fire or electric shock. If you are unfamiliar with any terms used in this instruction manual, do not attempt installation. Contact a qualified electrician.
- Be certain electrical power is off before and during installation and maintenance.
- Fixtures must be connected to a wiring system with an equipment–grounding conductor.
- Make sure the supply voltage is the same as the rated luminaire fixtures voltage.
- To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or sharp objects. Suitable for damp locations.

INSTALLATION

This fixture can be handheld or mounted with the provided hanging hooks. When mounting, this fixture must be mounted to an area that can structurally support the load.



Snap the (larger) lamp side of the hanging hook to the lens of the light. Repeat for remaining hooks.

With the hanging hooks installed on the fixture, mount the drop light in the desired location either vertically or horizontally. Use one or both hanging hooks as necessary. Run power to the fixture accordingly.

This light is shipped with the desired cord cap. If pigtail is selected, follow the diagram for wiring cord.

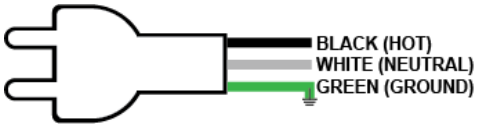

***Caution:* Only use voltage as shown on fixture nameplate!**

Plug the fixture into the appropriate receptacle. The light on this fixture is “instant-on” and will illuminate once power is supplied.

Available in 120-277 Volts AC, 50/60Hz or **11-25V AC/DC models.**
CHECK PRODUCT LABEL FOR CORRECT VOLTAGE!

The FTL-3-LED-CPR-25 is shock resistant, making it durable enough to withstand drops, falls, and rough handling.

LAMP REPLACEMENT (LEDT8-24-V1)

1. Loosen the set screw from the base handle.
2. Pull the handle away from the plastic encasing tube.
3. As the handle is pulled away, the seated bulb will slide out from the plastic encasing tube.
4. The bulb is held in place with 2 end cap bulb “spiders”.
5. Lay the handle and bulb assembly on a table.
6. Pull back the individual white plastic spiders on each end of the lamp. The bulb will free to remove.
7. Attach the individual white plastic spiders on each end of the new lamp and slide the entire assembly back into the plastic encasing tube.
8. Replace the handle and tighten set screw.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.