


Label Placement Guide

Part Number: EXP-MS-N4X-AT-HV-V2M

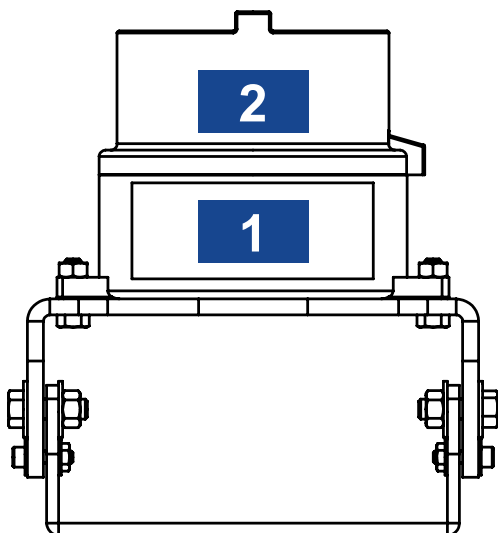

ID#	Label Description
1	Product Spec. Label
2	Serial Number Label

ID#	Label
1	Product Spec. Label EXP-MS-N4X-AT-HV-V2M System Voltage: 120- 277V AC 50 Hz Rated Load: 120V @ 400W; 220-240V @ 800W; 277V @ 1000W Amb. Temp: -20°C ~ 60°C Radiated Frequency: 5.8 GHz NRTL Listed for United States, Canada and IECEX/ATEX Rated CL I, Divs.1 & 2, Grps. B,C,D CL I, Zones 1 & 2, Grps. IIB+H2, IIA CL II, Divs. 1 & 2, Grps. E, F, G CL III, Divs. 1 & 2 NEMA 3R, 4, 7 (B, C, D), 9 (E, F, G) NRTL Listed to UL 508A NRTL Listed to UL 1203 NRTL Listed to CSA C22.2 No 14, 25, 30 
2	Serial Number Label   Serial: 1234567