IES COMPARE REPORT
REPORT FORMAT: DARK SKY

	EPL-MJ-15W-LED-XX-WL M.IES
[MANUFAC] keyword	LARSON ELECTRONICS LLC
[LUMINAIRE] keyword	CLASS 1 DIV 1 EXPLOSION PROOF LED MASON JAR FIXTURE
[LAMP] keyword	missing
Total Luminaire Watts	14.9
Total Lamp Lumens	2242
IES Classification	Type VS
Longitudinal Classification	Very Short
Cutoff Classification (deprecated)	Non-Cutoff
Maximum Candela	331.713
Maximum Candela Angle	247.5 H x 46.5 V
Max. Candela At 90 Degrees Vert.	236.991 (10.57% Lamp Lms.)
Max. Candela 80 to < 90 Vert.	259.198 (11.56% Lamp Lms.)
Zonal Lumens: 80-90	253.65
Zonal Lumens 90-180	605.29
Luminaire Lumens	2241
Total Luminaire Efficiency	100 %
Downward Total Efficiency	73 %
Upward Waste Light Ratio	0.27
Avg. Glare Zone Max. Luminous Intensity 80-90	11.56 %Lamp Luminous Flux
Avg. Glare Zone Flux 80-90	11.31 %Lamp Luminous Flux
Luminance Data 85v, 0h:	20385
Luminance Data 85v, 45h:	16120
Luminance Data 85v, 90h:	20887
LCS: Front-Low (0-30) Lumens	86.7
LCS: Front-Low (0-30) %Lamp	3.9

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.


IES COMPARE REPORT
REPORT FORMAT: DARK SKY

	EPL-MJ-15W-LED-XX-WL M.IES
LCS: Front-Medium (30-60) Lumens	336.4
LCS: Front-Medium (30-60) %Lamp	15.0
LCS: Front-High (60-80) Lumens	274.8
LCS: Front-High (60-80) %Lamp	12.3
LCS: Front-Very High (80-90) Lumens	127.1
LCS: Front-Very High (80-90) %Lamp	5.7
LCS: Back-Low (0-30) Lumens	86.1
LCS: Back-Low (0-30) %Lamp	3.8
LCS: Back-Medium (30-60) Lumens	326.2
LCS: Back-Medium (30-60) %Lamp	14.5
LCS: Back-High (60-80) Lumens	272.3
LCS: Back-High (60-80) %Lamp	12.1
LCS: Back-Very High (80-90) Lumens	126.5
LCS: Back-Very High (80-90) %Lamp	5.6
LCS: Uplight-Low (90-100) Lumens	219.2
LCS: Uplight-Low (90-100) %Lamp	9.8
LCS: Uplight-High (100-180) Lumens	386.0
LCS: Uplight-High (100-180) %Lamp	17.2
LCS: Total Lumens	2241
BUG Rating	B1-U3-G2

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES COMPARE REPORT
REPORT FORMAT: DARK SKY

CANDELA DISPLAY

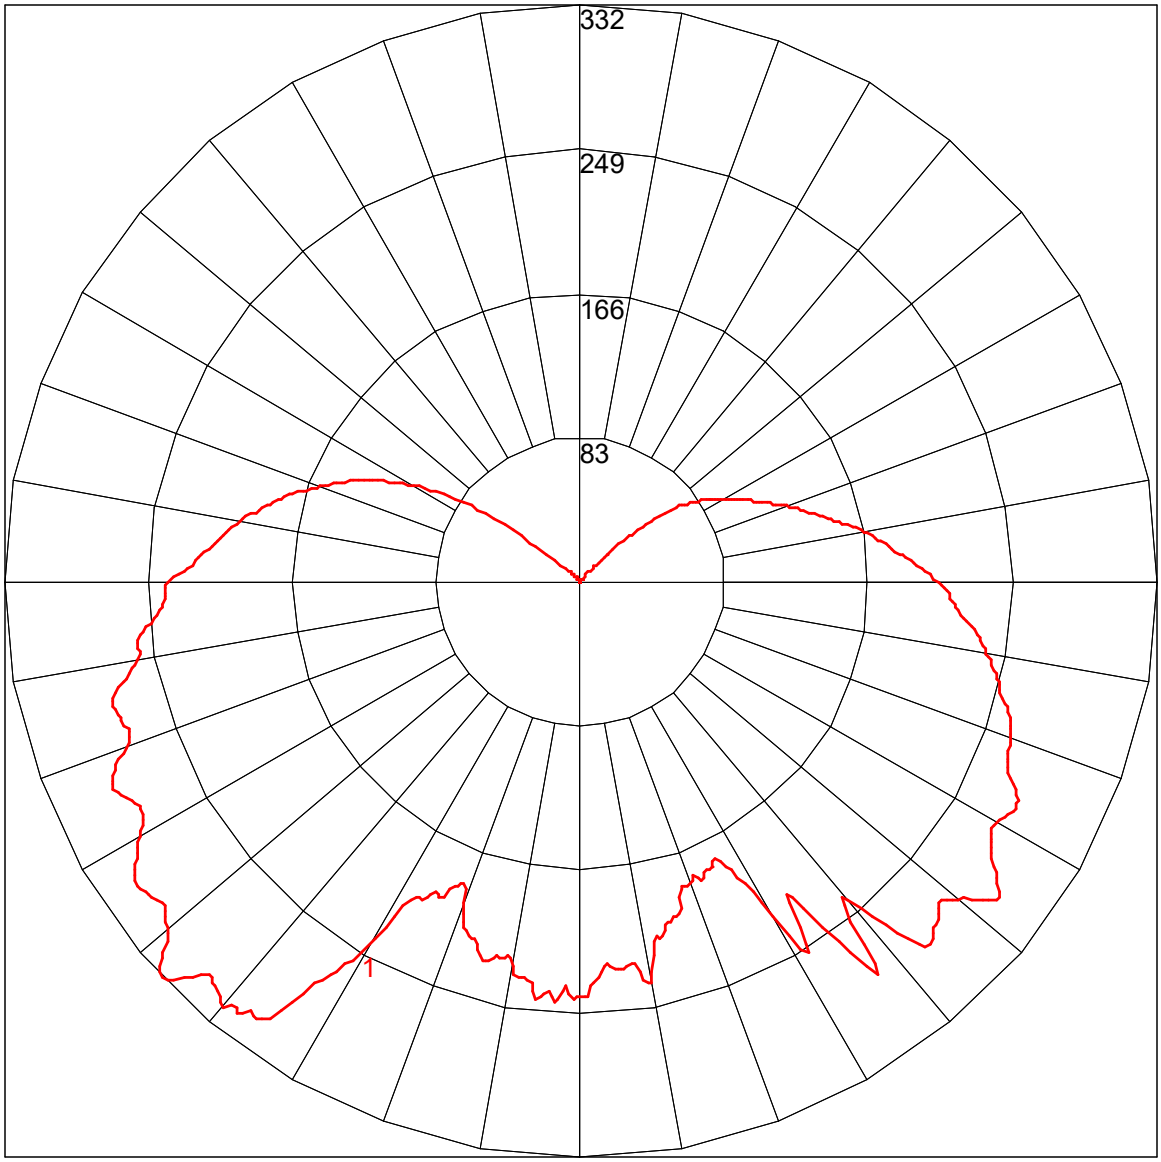

1 EPL-MJ-15W-LED-... - Vertical Plane Through Horizontal Angles (247.5 - 67.5) Max. Candela