



IES COMPARE REPORT
REPORT FORMAT: DARK SKY

EPL-MJ-15W-LED-XX-CM.IES

[MANUFAC] keyword	LARSON ELECTRONICS LLC
[LUMINAIRE] keyword	CLASS 1 DIV 1 EXPLOSION PROOF LED MASON JAR FIXTURE
[LAMP] keyword	missing
Total Luminaire Watts	14.9
Total Lamp Lumens	3735.48999023438
IES Classification	Type VS
Longitudinal Classification	Very Short
Cutoff Classification (deprecated)	Non-Cutoff
Maximum Candela	552.68
Maximum Candela Angle	247.5 H x 46.5 V
Max. Candela At 90 Degrees Vert.	394.86 (10.57% Lamp Lms.)
Max. Candela 80 to < 90 Vert.	431.86 (11.56% Lamp Lms.)
Zonal Lumens: 80-90	422.61
Zonal Lumens 90-180	1008.49
Luminaire Lumens	3735
Total Luminaire Efficiency	100 %
Downward Total Efficiency	73 %
Upward Waste Light Ratio	0.27
Avg. Glare Zone Max. Luminous Intensity 80-90	11.56 %Lamp Luminous Flux
Avg. Glare Zone Flux 80-90	11.31 %Lamp Luminous Flux
Luminance Data 85v, 0h:	33964
Luminance Data 85v, 45h:	26858
Luminance Data 85v, 90h:	34800
LCS: Front-Low (0-30) Lumens	144.5
LCS: Front-Low (0-30) %Lamp	3.9
LCS: Front-Medium (30-60) Lumens	560.6




IES COMPARE REPORT
REPORT FORMAT: DARK SKY

EPL-MJ-15W-LED-XX-CM.IES

LCS: Front-Medium (30-60) %Lamp	15.0
LCS: Front-High (60-80) Lumens	457.9
LCS: Front-High (60-80) %Lamp	12.3
LCS: Front-Very High (80-90) Lumens	211.8
LCS: Front-Very High (80-90) %Lamp	5.7
LCS: Back-Low (0-30) Lumens	143.4
LCS: Back-Low (0-30) %Lamp	3.8
LCS: Back-Medium (30-60) Lumens	543.4
LCS: Back-Medium (30-60) %Lamp	14.5
LCS: Back-High (60-80) Lumens	453.8
LCS: Back-High (60-80) %Lamp	12.1
LCS: Back-Very High (80-90) Lumens	210.8
LCS: Back-Very High (80-90) %Lamp	5.6
LCS: Uplight-Low (90-100) Lumens	365.3
LCS: Uplight-Low (90-100) %Lamp	9.8
LCS: Uplight-High (100-180) Lumens	643.2
LCS: Uplight-High (100-180) %Lamp	17.2
LCS: Total Lumens	3735
BUG Rating	B1-U4-G2

IES COMPARE REPORT
REPORT FORMAT: DARK SKY

CANDELA DISPLAY

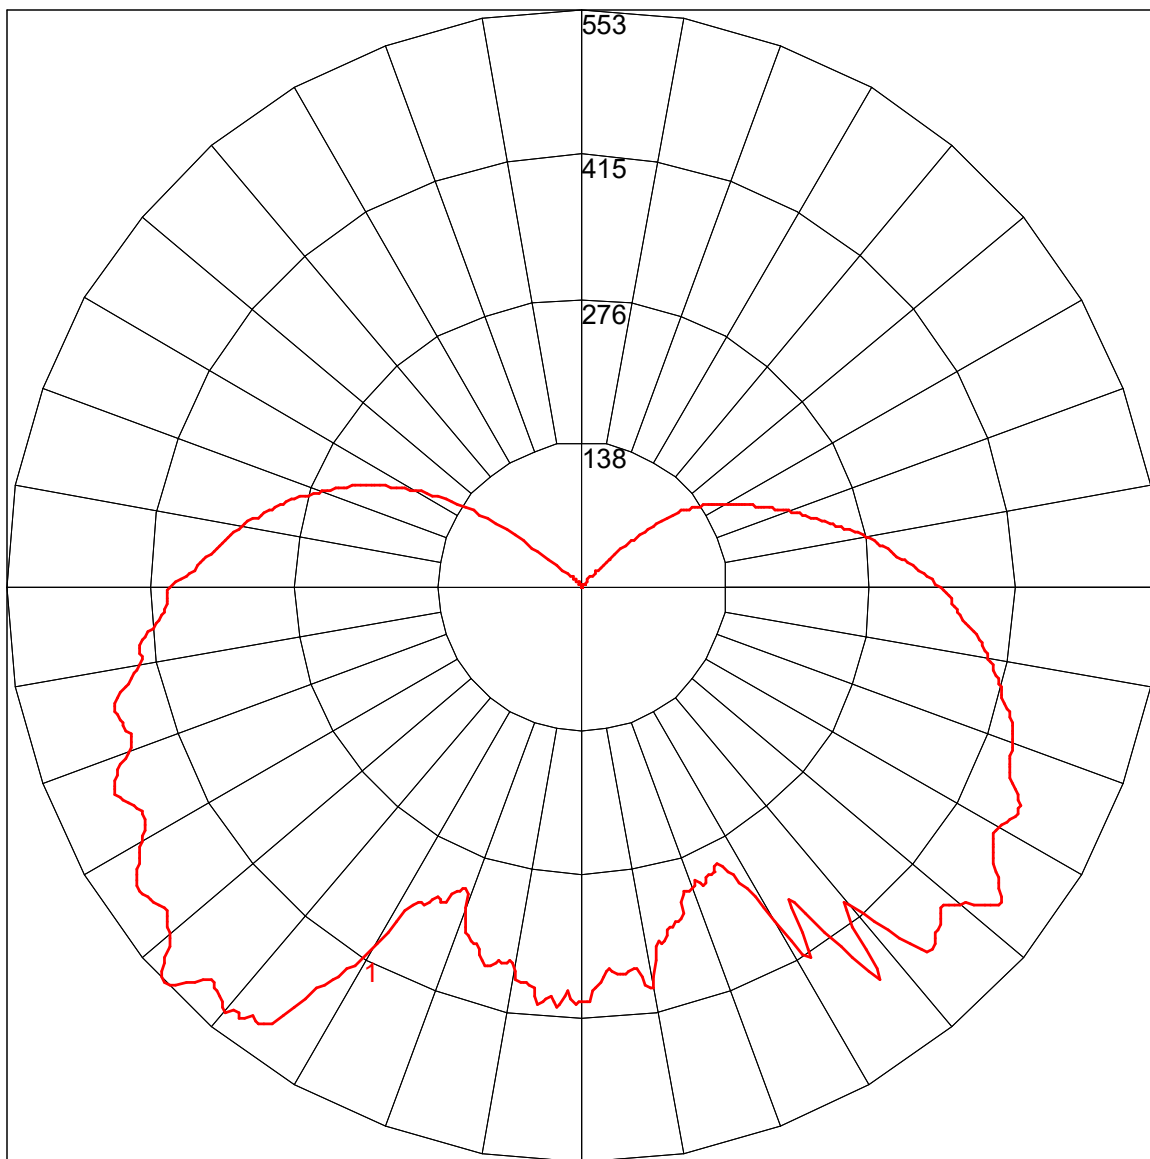

1 EPL-MJ-15W-LED-... - Vertical Plane Through Horizontal Angles (247.5 - 67.5) Max. Candela