




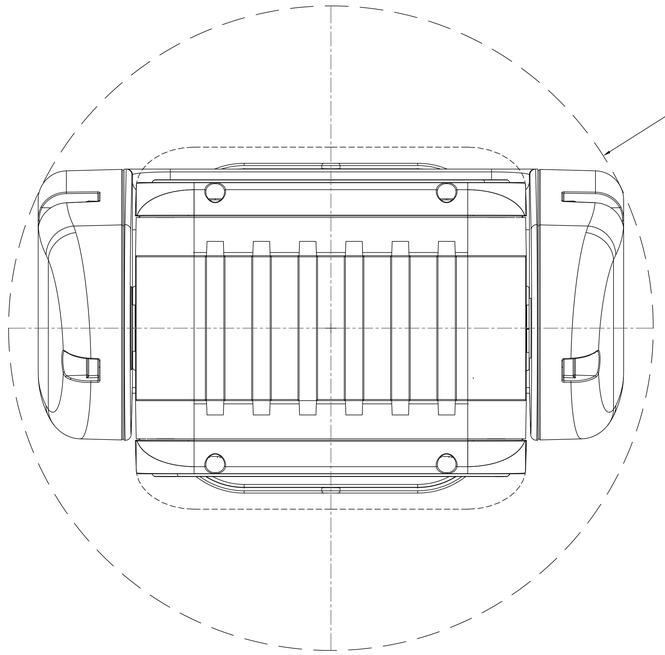


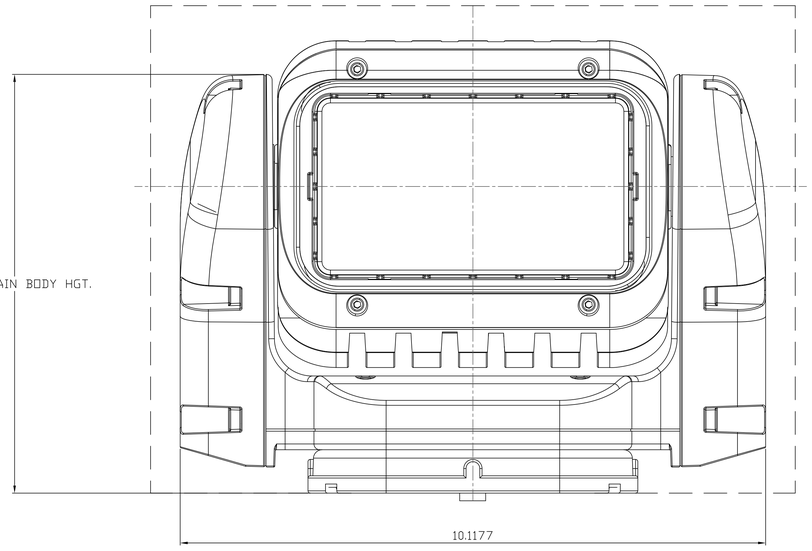

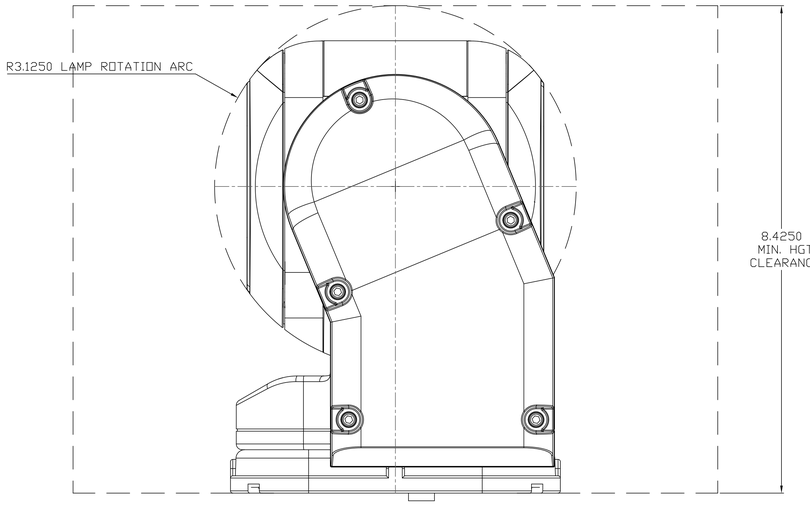

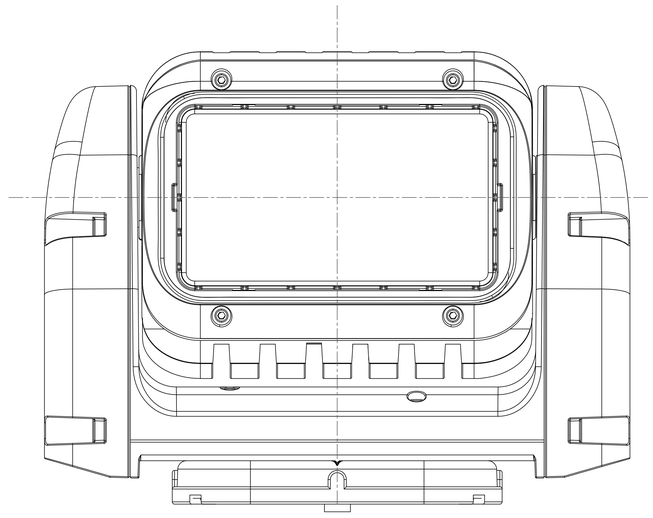

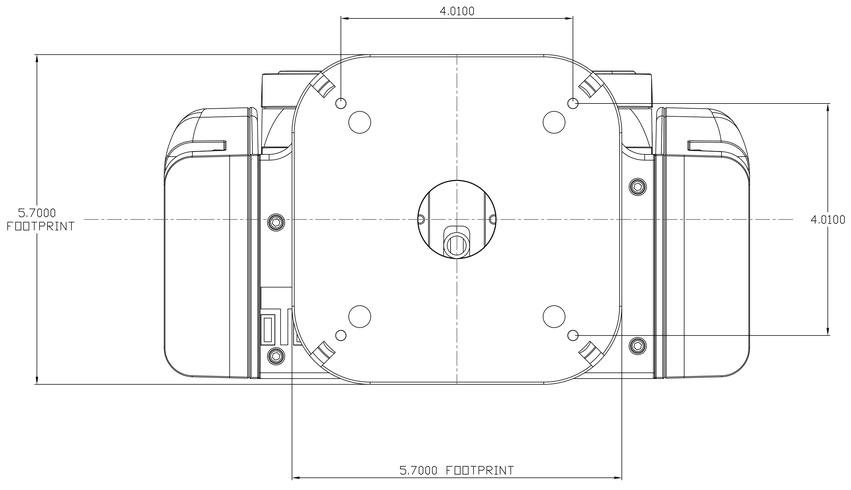

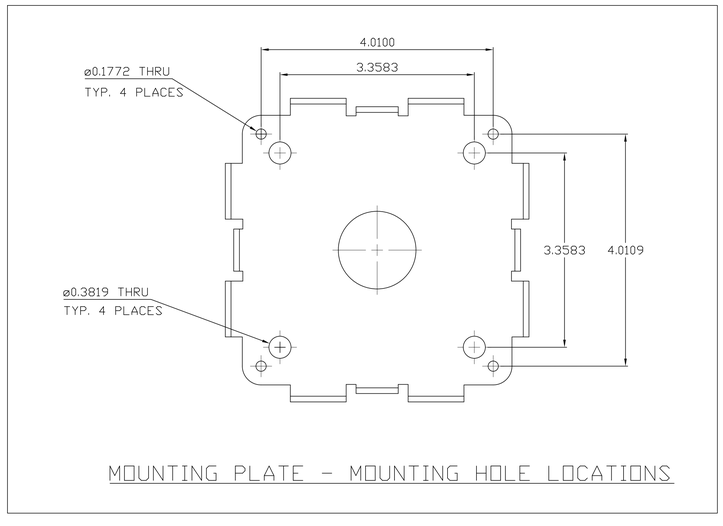

MOUNTING PLATE - MOUNTING HOLE LOCATIONS


PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF <INSERT COMPANY NAME HERE>. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF <INSERT COMPANY NAME HERE> IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	DATE	
DIMENSIONS ARE IN INCHES	DRAWN	WAU	2015/03/25	
TOLERANCES:	CHECKED			
FRACTIONAL ± BEND ±	ENG APPR.			
TWO PLACE DECIMAL ±	MFG APPR.			
THREE PLACE DECIMAL ±	Q.A.			
INTERPRET GEOMETRIC TOLERANCING PER:	COMMENTS:			
MATERIAL				
FINISH				
NEXT ASSY	USED ON			
APPLICATION				


TITLE: GOLIGHT JANUS - BASIC DIMENSIONS

SIZE	DWG. NO.	REV
E	NONE	

SCALE: 1:1 | WEIGHT: | SHEET 1 OF 1

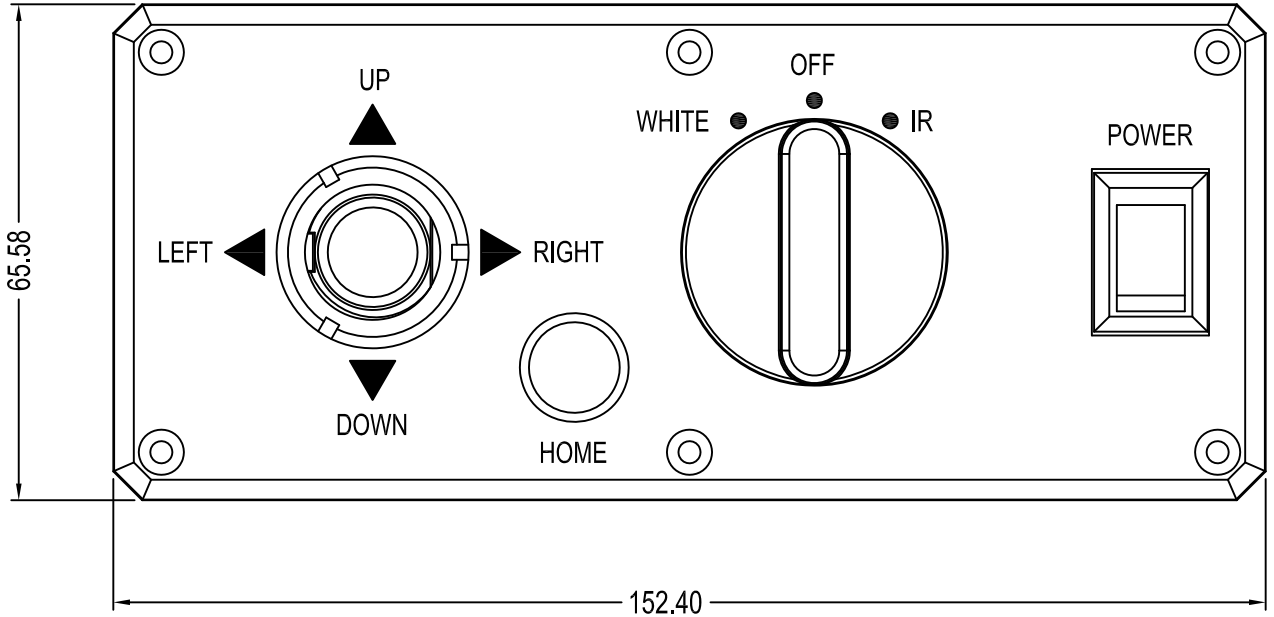
UP
LEFT
RIGHT
DOWN
HOME
OFF
WHITE
IR
POWER
65.58
152.40

REVISIONS				
EC NO	DATE	REV	DESCRIPTION	CHANGER
	12.11.20	A	INITIAL RELEASE.	LONG JIN
	12.12.14	proposal B	1.ADD P2 CONN. 2.CHG WIRE FROM 20AWG TO 18AWG FOR PIN 1 & PIN 2. 3.ADDED NOTE 4.	LONG JIN
	13.01.22	proposal B1	1.CHG P2 CONN. 2.CHG WIRE FROM 20AWG TO 18AWG.	LONG JIN

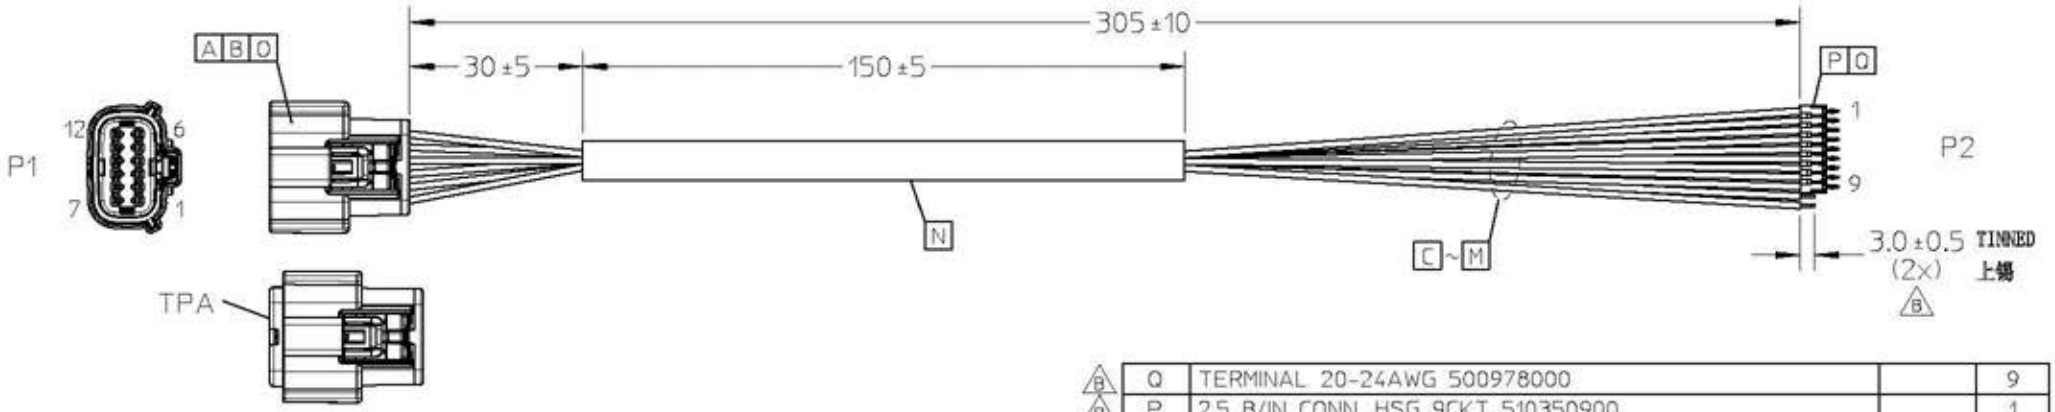

PUSH TPA INTO HSG AFTER ASSEMBLED TERMINAL AND KEY
入完所有端子和KEY后按下TPA装进HSG里

NOTES
1. THIS PRODUCT MUST MEET EU 2011/65/EU ROHS COMPLIANCE.
此产品需符合EU 2011/65/EU ROHS环保要求.
2. ELECTRICAL PERFORMANCE REFER TO ES-000.
电气特性参考ES-000.
3. INSERT ITEM O INTO PIN 12 OF P1.
ITEM O需装配到 P1端的 PIN 12.
4. TRIMMED CAVITY PLUG BEFORE WIRES ARE INSTALLED.
B 修剪平防水塞后再入线
5. STICK UL LABEL ON THE OUTSIDE CARTON.
外箱上贴UL 标签

WIRING CHART				
P1	P2	WIRE AWG	COLOR	Instructions
1		18AWG	RED	VDD
2		18AWG	BLACK	GND
3	1	20AWG	GREEN	DOWN
4	2	20AWG	ORANGE	UP
5	3	20AWG	VIOLET	RIGHT
6	4	20AWG	GRAY	LEFT
7	5	20AWG	BLUE	IR
8	6	20AWG	YELLOW	WHITE
9	7	20AWG	WHITE	GO HOME
10	8	20AWG	BROWN	
11	9	20AWG	WHITE/BLUE	GND
12	SEE NOTES 3&4			

ITEM	DESCRIPTION	L(MM)	Q'TY
Q	TERMINAL 20-24AWG 500978000		9
P	2.5 B/IN CONN. HSG 9CKT 510350900		1
O	MX150 BLADE CAVITY PLUG 343450001		1
N	HST F 10MM 125C (UL) BLACK 887805010	150±5	1
M	20AWG,PLATED,PVC,WH/BU,OD=1.80MM,UL1569 172007613	A/R	
L	20AWG,PLATED,PVC,BN,OD=1.80MM,UL1569 172006808	A/R	
K	20AWG,PLATED,PVC,WT,OD=1.80MM,UL1569 172006812	A/R	
J	20AWG,PLATED,PVC,YL,OD=1.80MM,UL1569 172006806	A/R	
I	20AWG,PLATED,PVC,BU,OD=1.80MM,UL1569 172006809	A/R	
H	20AWG,PLATED,PVC,GY,OD=1.80MM,UL1569 172006811	A/R	
G	20AWG,PLATED,PVC,VL,OD=1.80MM,UL1569 172006810	A/R	
F	20AWG,PLTD,PVC,ORG,OD=1.80mm,UL1569 172002758	A/R	
E	20AWG,PLATED,PVC,GN,OD=1.80MM,UL1569 172006807	A/R	
D	18AWG/34STD,PLTD,PVC,RD,OD=2.05MM,UL1569 645800355	A/R	
C	18AWG/34STD,PLTD,PVC,BK,OD=2.05MM,UL1569 645800348	A/R	
B	TERMINAL 18-20AWG 330123002		11
A	MX150 ASSY 1.5 RCPT 2X6 BLK A/12 334721201		1

B B B B

DESCRIPTION REV

QUALITY SYMBOLS
FA=0
FB=0
FC=0

GENERAL TOLERANCES (UNLESS SPECIFIED)	mm	INCH
4 PLACES	±	±
3 PLACES	±	±
2 PLACES	±	±
1 PLACE	±	±
0 PLACE	±	±
ANGULAR ±	°	

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: ---
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

DRAWN BY: XIAOCAN DATE: 2012/09/17
CHECKED BY: LONG JIN DATE: 2012/09/17
APPROVED BY: FRED DATE: 2012/09/17

TITLE: GL-4600 Series
11 wires 18x2+20x9 12"

MATERIAL NO.: 688014093
DOCUMENT NO.: E-68801-3160
SHEET NO.: 1 OF 1
SIZE: A4

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION