


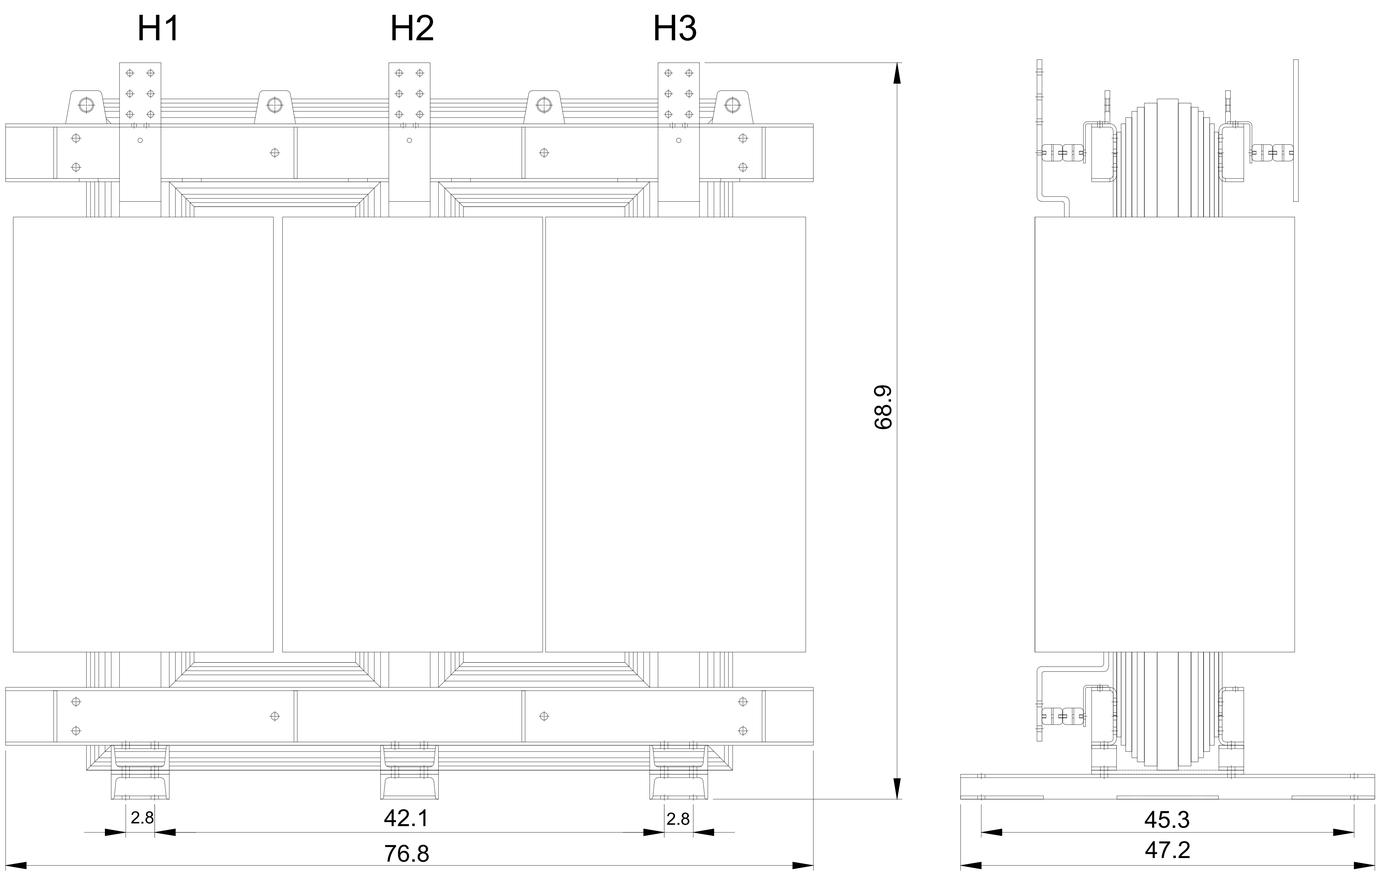


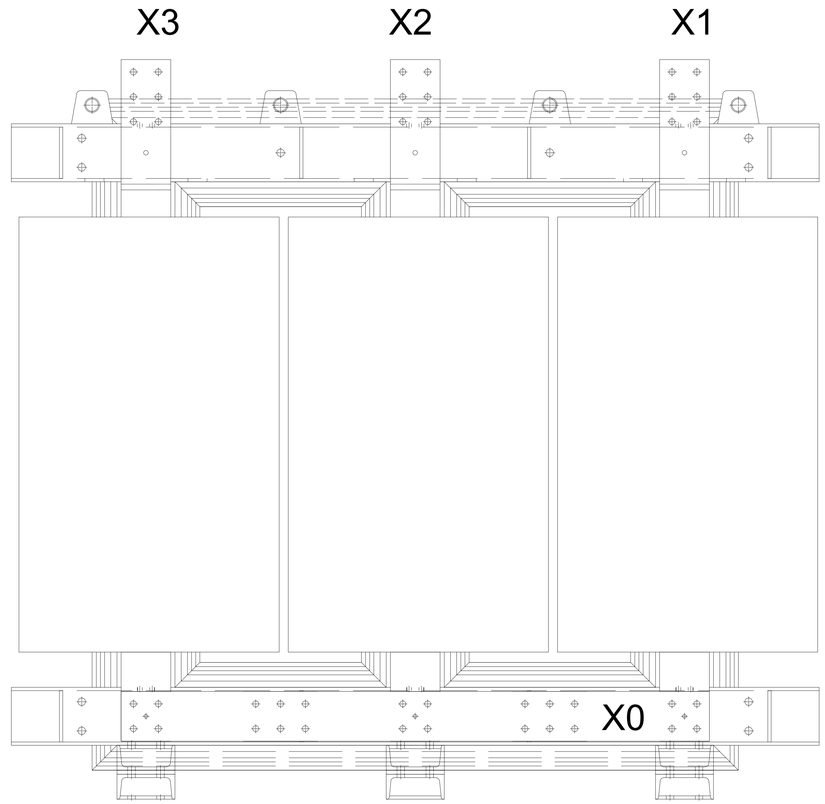

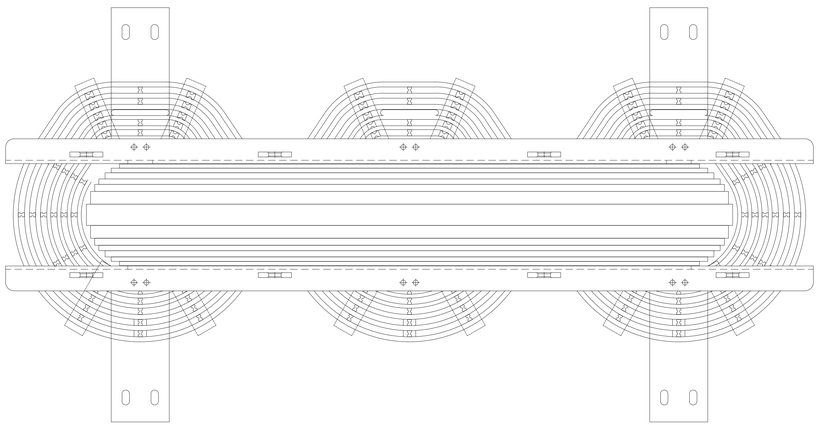


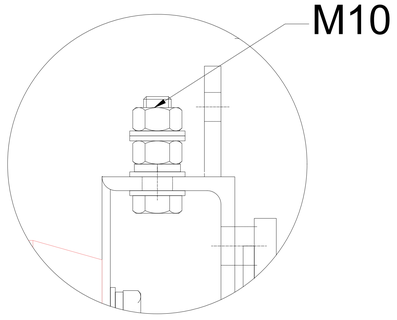


Grounding bolt

Phase	3	Frequency	60Hz
Capacity	2000KVA		
Input	480V		
Output	415Y/240V		
Vector	Dy11		
Weight	13,448Lbs		

H1 - H2 - H3 480V

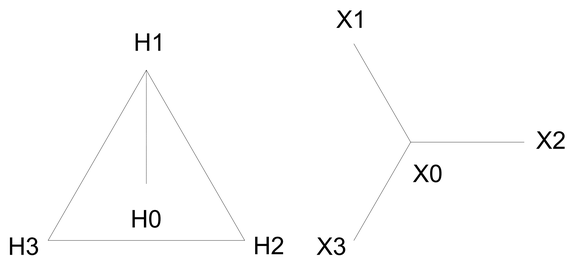

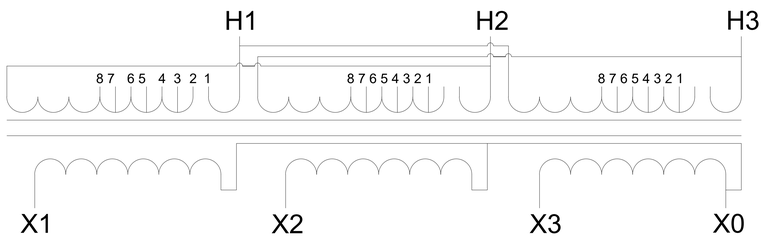


LARSON MAGNETICS


9419 E US HWY 175,
KEMP, TX 75143

TITLE: MT-DOE16-3P-480D-2000KVA-415Y.240 -N3R


DRAWN BY	DATE	REV
		A
CHECKED BY	SHEET #	DRAWING #
	1 OF 3	101

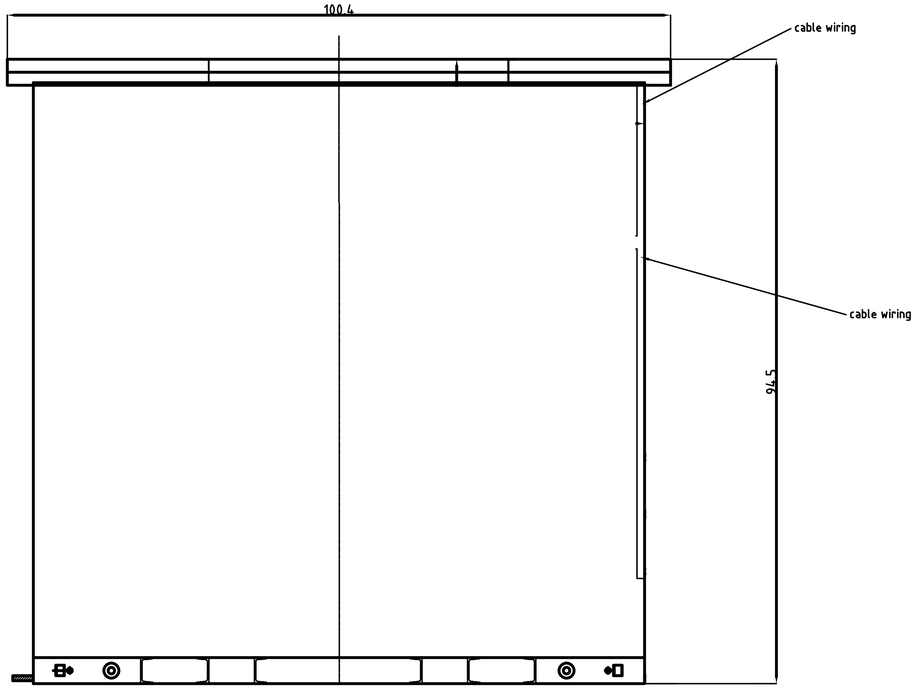

LV COMPARTMENT FRONT VIEW

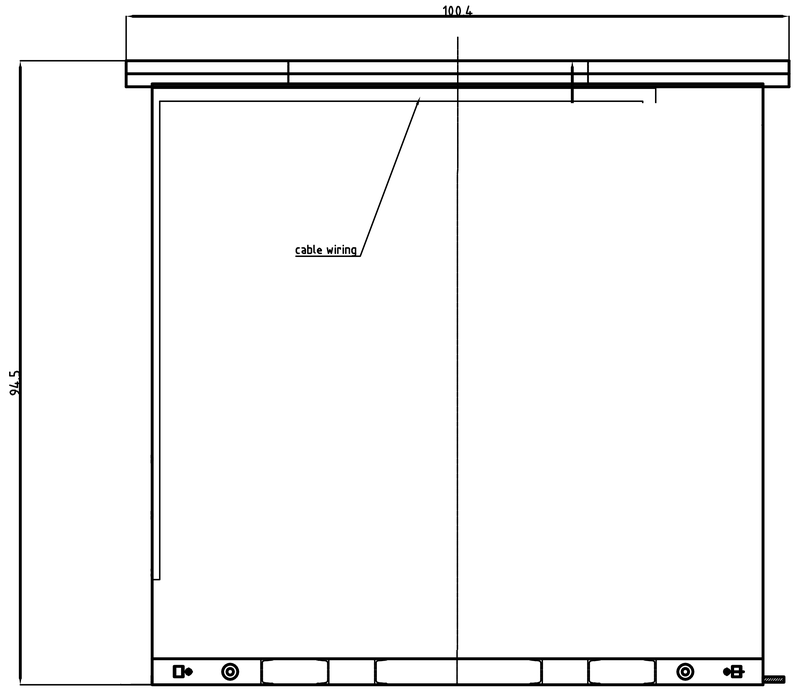

HV COMPARTMENT FRONT VIEW

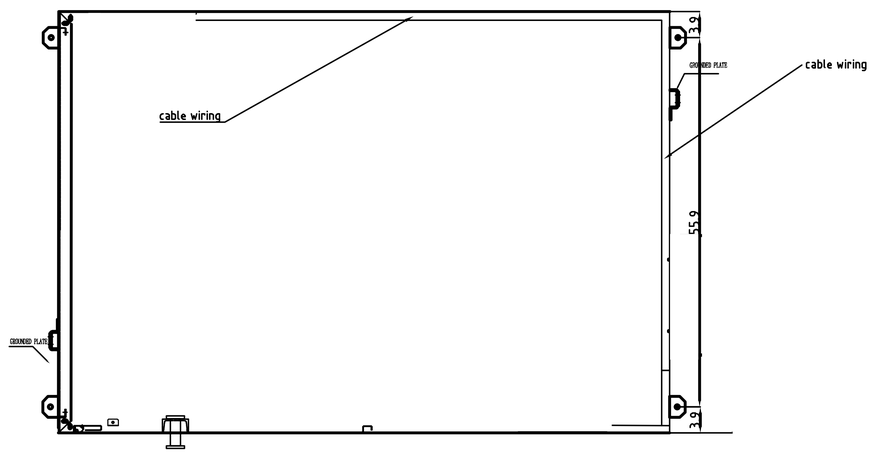

BOTTOM VIEW

LARSON MAGNETICS

9419 E US HWY 175,
KEMP, TX 75143

TITLE		
MT-DOE16-3P-480D-2000KVA-415Y.240 -N3R		
DRAWN BY	DATE	REV
		A
CHECKED BY	SHEET #	DRAWING #
	2 OF 3	102

210

170

150


230

THREE PHASE DRY TYPE TRANSFORMER
MT-DOE16-3P-480D-2000KVA-415Y.240-N3R

PRIMARY	
VOLTAGE (V)	CURRENT (A)
480	2405.7
SECONDARY	
VOLTAGE (V)	CURRENT (A)
415	2782.5
240	4811.4

RATED CAPACITY	2000 KVA	STANDARD	DOE2016
Input	480V	PRODUCT CODE	285349
Output	415Y/240V	SERIAL NO.	
IMPEDANCE	2.5 - 6.5 %		
USE CONDITION	OUTDOOR	TEMPERATURE RISE	150 °C
PHASE	3 PHASE	INSULATION CLASS	220 °C
VECTOR GROUP	Dyn11		
RATED FREQUENCY	60 Hz	TOTAL WEIGHT	13448 lbs
COOLING TYPE	ANN	MANUFACTURE DATE	2026.05

WIRE CONNECTION

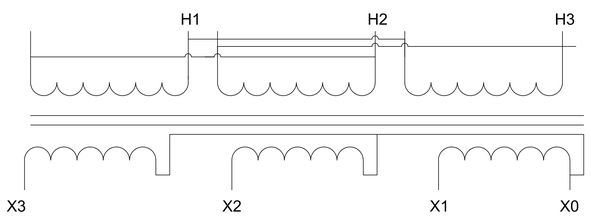

LARSON MAGNETICS

LARSON MAGNETICS

LARSON MAGNETICS	TITLE: MT-DOE16-3P-480D-2000KVA-415Y.240-N3R		
	DRAWN BY	DATE	REV: A
9419 E US HWY 175, KEMP, TX 75143	CHECKED BY	SHEET #: 3 OF 3	DRAWING #: 103