

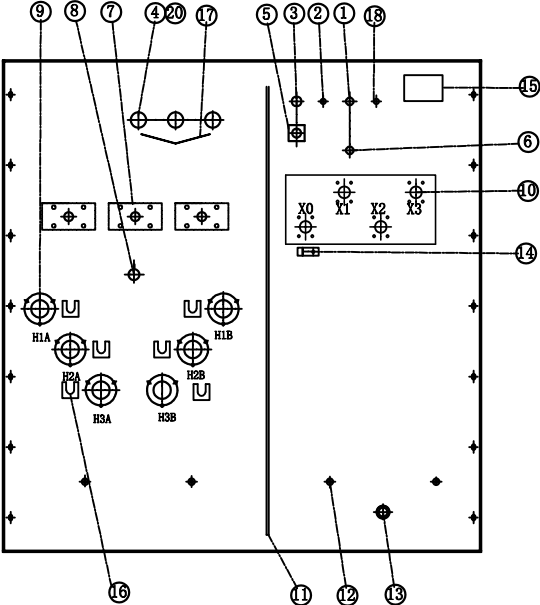
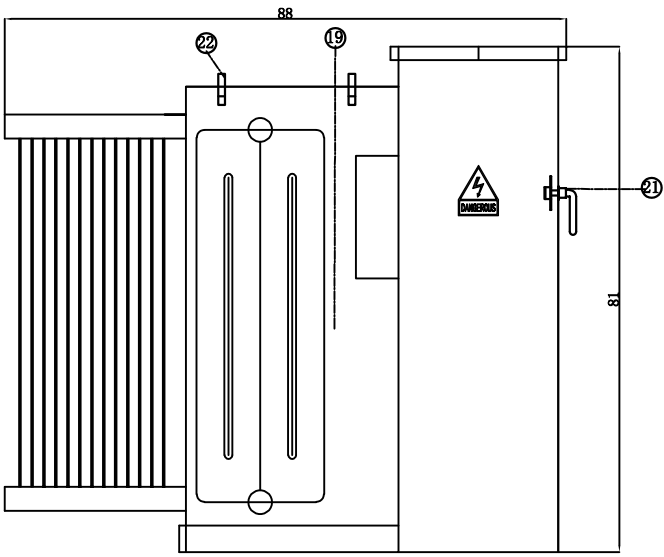


WIRING CONNECTION

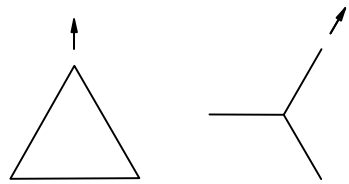

PHASOR DIAGRAM

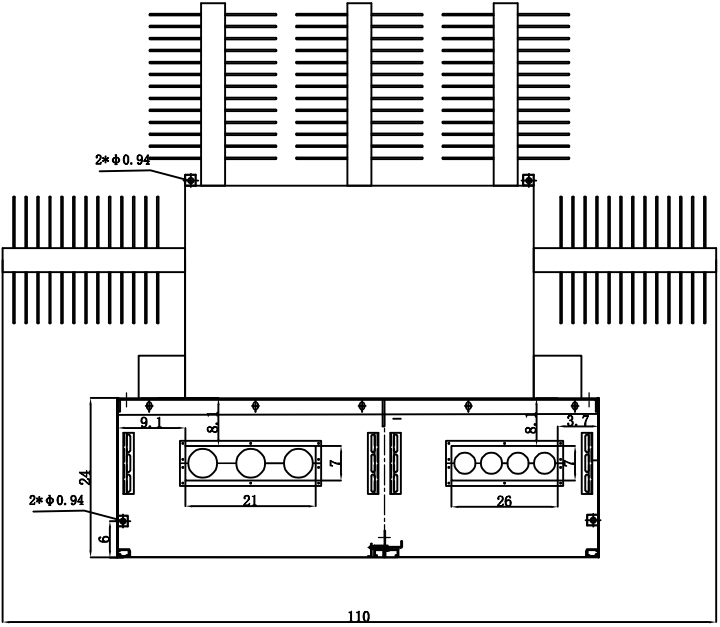

23	painting	Munsell green			
22	lifting lug		4		
21	padlock		1		
20	current limiting fuse		3		
19	insulation oil				
18	gas sample valve		1		Schrade Valve
17	drip shield		1		
16	parking stand		6		
15	nameplate		2		
14	grounding strap		1		
13	drain valve w/sampler		1		
12	grouding lug		4		with copper bar
11	reinforcing rib		1		
10	LV bushing		4		10-hole spade
9	HV bushing		6	loadbreak	with (3) arrester
8	off-circuit tap changer		1		
7	loadbreak switch		3		
6	temperature indicator		1		
5	oil indicator		1		
4	Bayonet fuse		3		w/flapper valve
3	oil fill valve		1		
2	pressure relief valve		1		automatic action
1	pressure indicator		1		

No.	Name	Model	QTY	Material	Remark
		2500kVA, 60Hz, KNAN, 34500V, Delta Pri. 480Y/277V, Wye-N			
3P Pad Mounted Transformer					
mark	revision	signature	date	pattern mark	weight scale
designed		standard			
checked		examined			
audited		approved			
crafted		date		total page	page



Approx. Weight: 14550LBS.

Remark: dimensions here are in inches.Only for approval/preliminary design..