

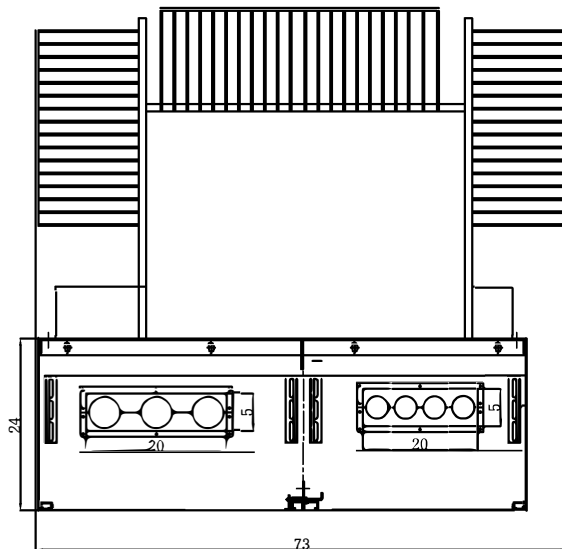
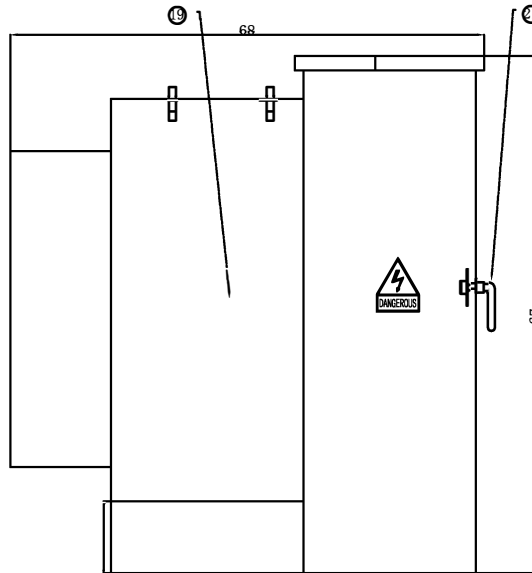


MT-PML-R7-3P-DMQ-1MVA-YE-LT-DF-A6-BB-CZ-2B6-M4


Approx. Weight: 7050LBS.

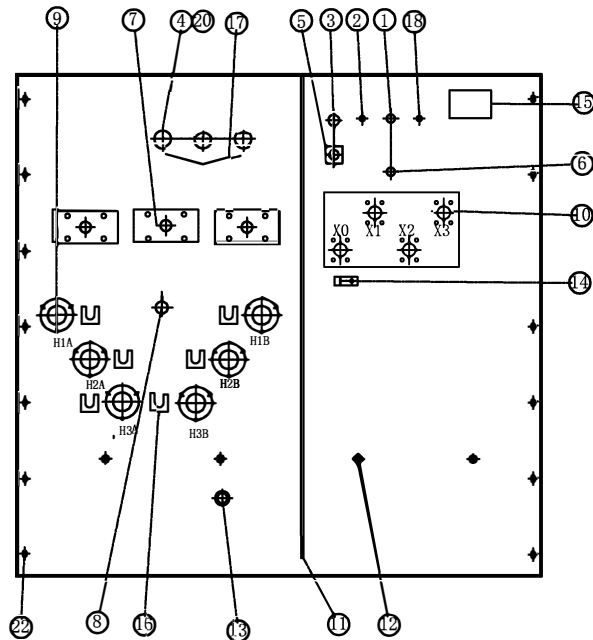

Remark: dimensions here are in inches.Only for approval/preliminary design..

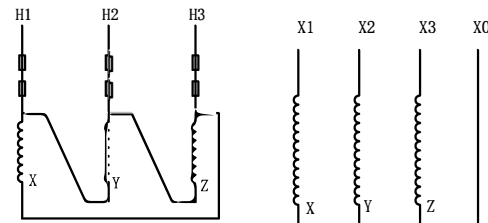

WIRING CONNECTION

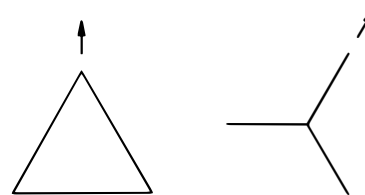

PHASOR DIAGRAM

22	SS hinges&pins				
21	padlock	penta-head bolt	1		
20	current limiting fuse		3		with Bayonet fuse
19	insulation oil	Biodegradable oil			
18	gas sample valve		1		Schrade Valve
17	drip shield		1		
16	parking stand		6		
15	nameplate		1		
14	grounding strap		1		
13	drain valve w/sampler		1		
12	grouding lug	Ø25*20, M10	4		with copper bar
11	reinforcing rib	8mm steel	1		
10	LV bushing		4		6-hole spade
9	HV bushing	600A bushing	6		with (3) arrester
8	off-circuit tap changer		1		
7	load breaker switch	600A, 15KV	3		2 position
6	temperature indicator		1		
5	oil indicator		1		
4	Bayonet fuse		3		w/flapper valve
3	oil fill valve		1		
2	pressure relief valve		1		automatic action
1	pressure indicator		1		

No.	Name	Model	QTY	Material	Remark
		1000kVA, 60Hz, KNAN, 13200V, Delta Pri., 480Y/277V, Wye-N			
		3P Pad Mounted Transformer			
mark	revision	signature	date	pattern mark	weight scale
designed		standard			
checked		examined			
audited		approved			
crafted		date		total page	page

