


MT-PML-R7-3P-DMA-150KVA-YT-LT-DF-A6-BB-CS-2B4-M1

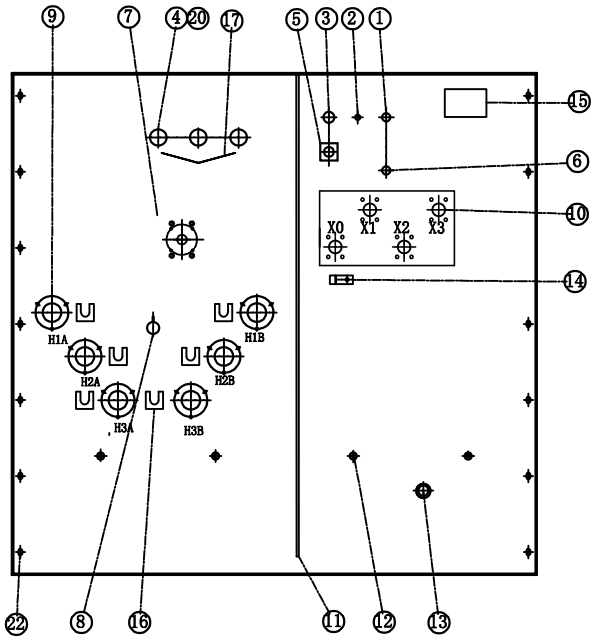

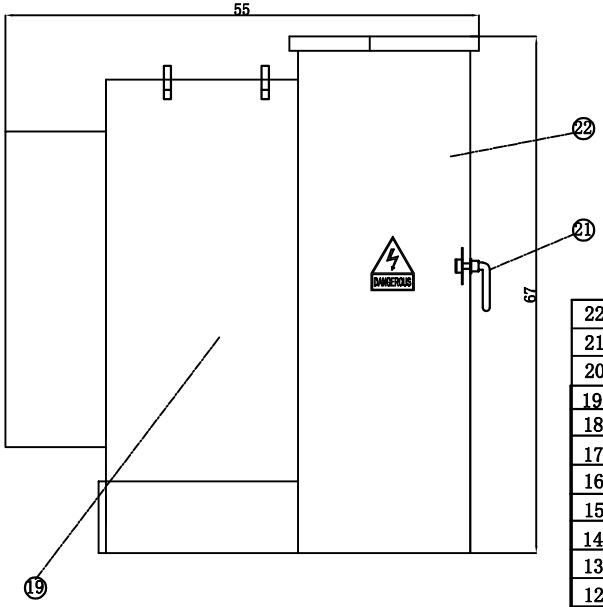


Approx. Weight: 3633LBS.


No.	Name	Model	QTY	Material	Remark
22	SS hinges&pins				
21	padlock	penta-head bolt	1		
20	current limting fuse		3		with Bayonet fuse
19	insulation oil	Biodegradable oil			
18	Housing		1		
17	drip shield		1		
16	parking stand		6		
15	nameplate		1		
14	grounding strap		1		
13	drain valve w/sampler		1		
12	grouding lug	Ø25*20, M10	4		with copper bar
11	reinforcing rib	8mm steel	1		
10	LV bushing		4		4-hole spade
9	HV bushing	200A well&insert	6	load break	with (3) arrester
8	off-circuit tap changer		1		
7	load breaker switch		1		4-position
6	temperature indicator		1		
5	oil indicator		1		
4	Bayonet fuse		3		w/flapper valve
3	oil fill valve		1		
2	pressure relief valve		1		automatic action
1	pressure indicator		1		

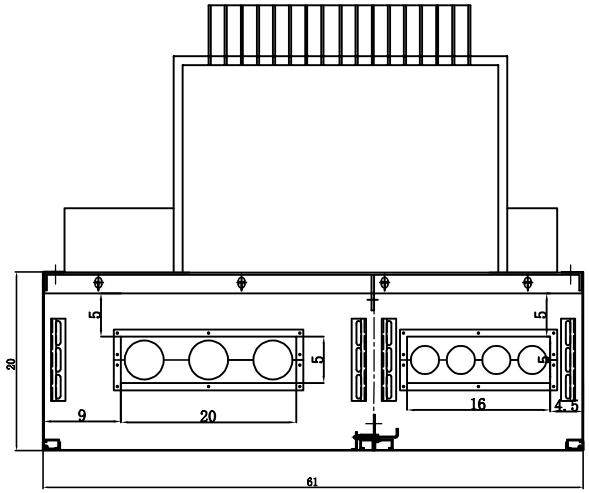

Remark: dimensions here are in inches.Only for approval/preliminary design..



WIRING CONNECTION



PHASOR DIAGRAM

mark	revise	revision	signature	date
designed			standard	
checked			examined	
audited			approved	
crafted			date	

150kVA, 60Hz, KNAN,
34500V, Delta
208Y/120V, Wye-N

3P Pad Mounted Transformer

pattern mark				weight	scale
total page		page			

LARSON ELECTRONICS