


MT-PML-R4-3P-GMP-225KVA-YT-LT-DF-A6-BM-CZ-2B6-M1


Approx. Weight: 3570LBS.

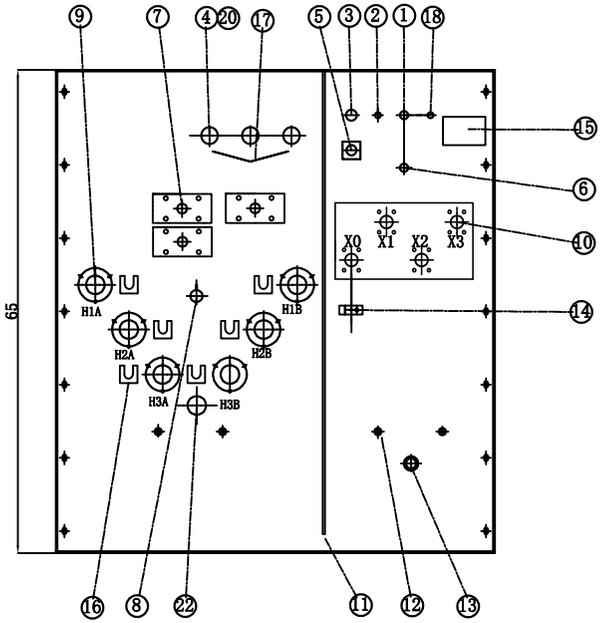

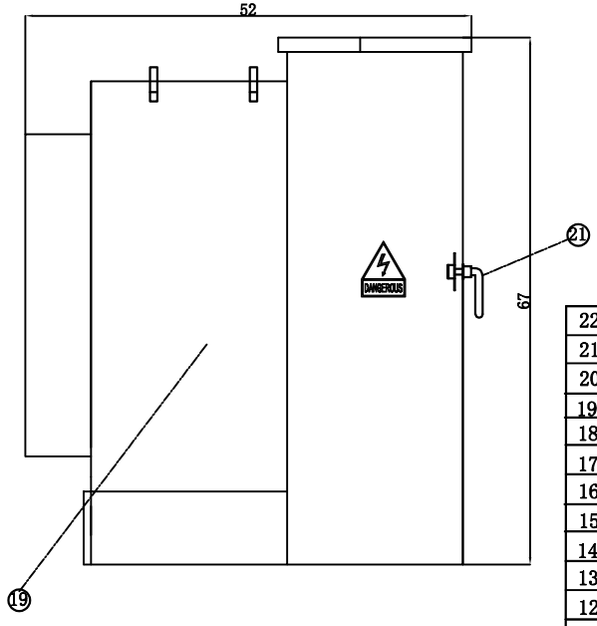


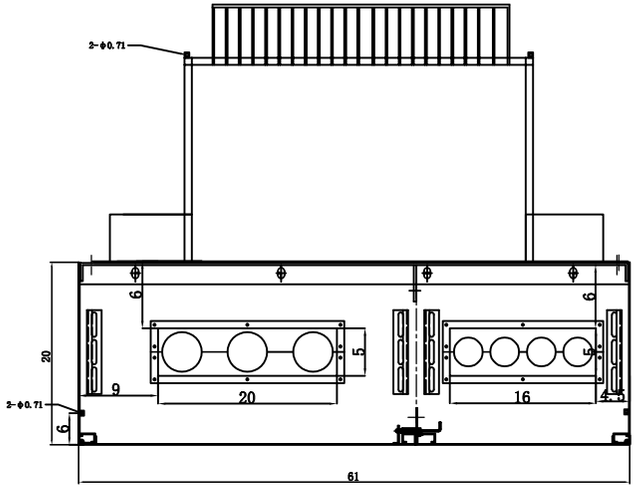

Remark: dimensions here are in inches.Only for approval/preliminary design..

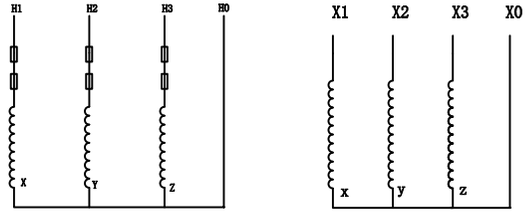

WIRING CONNECTION



PHASOR DIAGRAM

No.	Name	Model	QTY	Material	Remark
22	H0 bushing		1		
21	padlock		1		
20	current limting fuse		3		with Bayonet fuse
19	insulation oil				
18	gas sampler valve		1		Schrade Valve
17	drip shield		1		
16	parking stand		6		
15	nameplate		1		
14	grounding strap		1		
13	drain valve w/sampler		1		
12	grouding lug		4		with copper bar
11	reinforcing rib		1		
10	LV bushing		4		6-hole spade
9	HV bushing		6	load break	with (3)arrester
8	off-circuit tap changer		1		
7	load breaker switch		3		2-position
6	temperature indicator		1		
5	oil indicator		1		
4	Bayonet fuse		3		w/flapper valve
3	oil fill valve		1		
2	pressure relief valve		1		automatic action
1	pressure indicator		1		

225kVA, 60Hz, ONAN,
208Y/120V, Wye-N
13800Y/7968V Sec.

3P Pad Mounted Transformer

mark	revise	revision	signature	date
designed			standard	
checked			examined	
audited			approved	
crafted			date	

pattern mark | weight | scale

total page | page

LARSON ELECTRONICS