


FRONT VIEW


SIDE VIEW

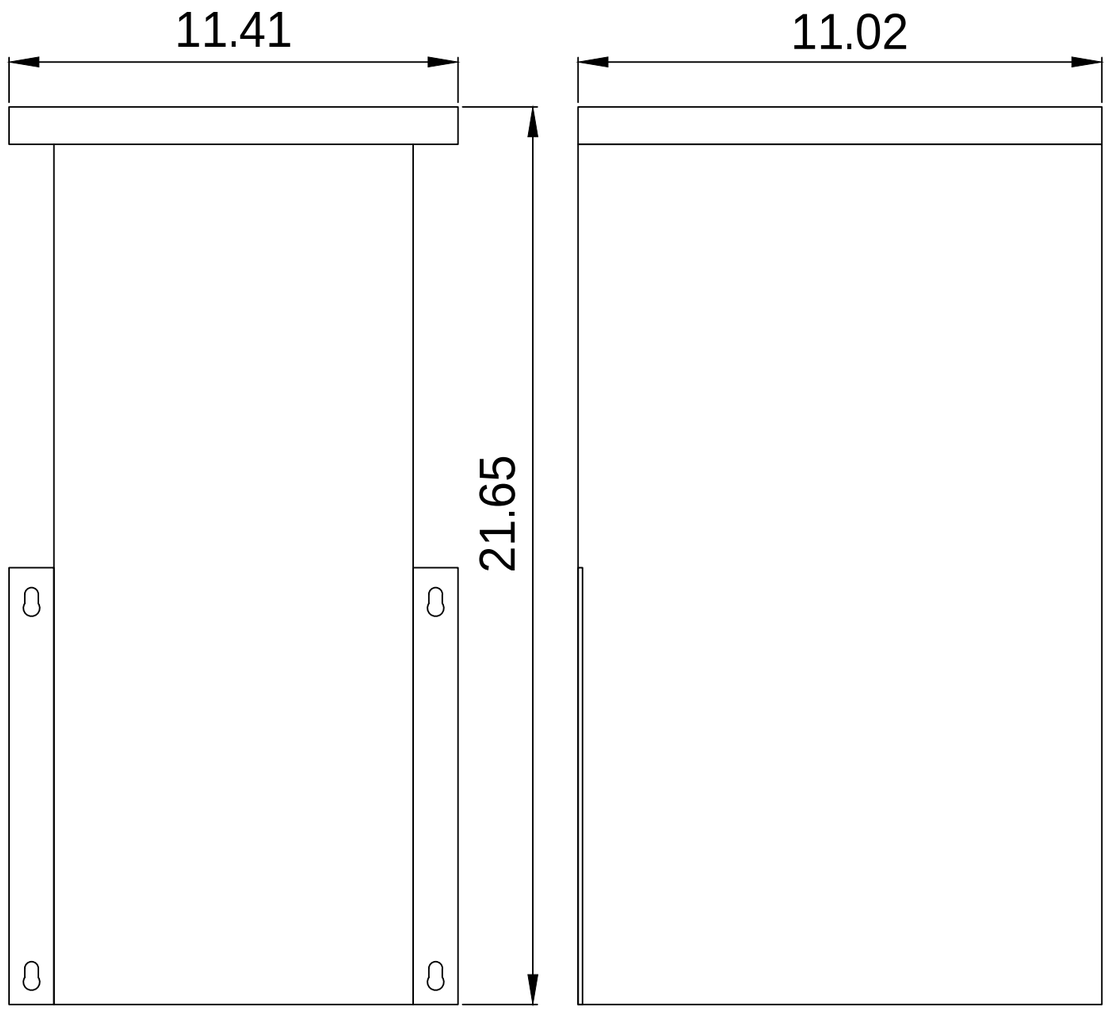

VERTICAL VIEW

Notes:
1.All dimensions are in inches.
2.It should be NEMA 4X,304SS.

Phase	1	Frequency	60Hz
Capacity	10KVA		
Input	480V+2*2.5%&-4*2.5%		
Output	120/240VAC		
Vector	Ii0		
Weight	224.86Lbs		

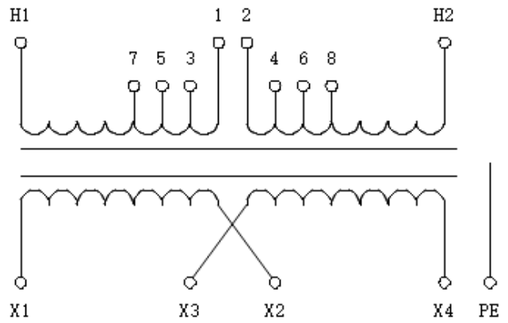

1-2	H1-H2:	480V+5%
1-4/2-3	H1-H2:	480V+2.5%
3-4	H1-H2:	480V
3-6/4-5	H1-H2:	480V-2.5%
5-6	H1-H2:	480V-5%
5-8/6-7	H1-H2	480V-7.5%
7-8	H1-H2	480V-10%

X1-X3&X2-X4	X1-X4	120V
X2-X3	X1-X2(X3)-X4	120/240V
X2-X3	X1-X4	240V

10KVA
480V+2*2.5%-4*2.5%/
120/240V

ENCAPSULATED
TRANSFORMER

S | A | B | C 1:1

LARSON MAGNETICS


210

SINGLE PHASE DRY TYPE TRANSFORMER

PRIMARY		
TAP POSITION	VOLTAGE (V)	CURRENT (A)
1	COM.	
2	504	
3	492	
4	480	20.8
5	468	
6	456	
7	444	
8	432	
SECONDARY		
VOLTAGE (V)	CURRENT (A)	
120/240V	41.6	

RATED CAPACITY	10KVA	STANDARD	DOE2016
Input	240/480V	PRODUCT ID	25334DG10B1
Output	120/240V	SERIAL NO.	WE25334DG10-B1
IMPEDANCE	3~7 %	NEMA 4X	
USE CONDITION	OUTDOOR	TEMPERATURE RISE	115℃
PHASE	1 PHASE	INSULATION CLASS	180℃
VECTOR GROUP	Ii0	FULLY POTTED	
RATED FREQUENCY	60 Hz	TOTAL WEIGHT	224.86 lbs
COOLING TYPE	AN	MANUFACTURING DATE	2025.11

WIRE CONNECTION



LARSON MAGNETICS

Larson Magnetics LLC

Kemp, TX USA

170

150

230