
REV	DESCRIPTION	DATE
A	PRODUCTION RELEASE	05-08-2026

MPD-MTS-3P-200A-480Y.277-N3R-M2
(CUSTOM 305094)

LARSON ELECTRONICS®

TAGS	QTY	CATALOG	DESCRIPTION
P1-101.24	1	UNV00002288	Green Male Cam Lock Receptacle, 600V 400A, 90-Degree, 2/0 - 4/0 AWG
P1-101.22	1	UNV00002290	White Male Cam Lock Receptacle, 600V 400A, 90-Degree, 2/0 - 4/0 AWG
P1-101.16	1	UNV00008713	Brown Male Cam Lock Receptacle, 600V 400A, 90-Degree, 2/0 - 4/0 AWG
P1-101.18	1	UNV00008714	Orange Male Cam Lock Receptacle, 600V 400A, 90-Degree, 2/0 - 4/0 AWG
P1-101.20	1	UNV00008716	Yellow Male Cam Lock Receptacle, 600V 400A, 90-Degree, 2/0 - 4/0 AWG
DMM1-101.04	1	UNV00021848	Submeter, Outdoor, 277/480V, 3 Phase 4 Wire, Max 200A, 3 Split Core Current Transformers, Electric Meter Kit
FU1-101.08 FU1-101.08A FU1-101.08B	3		0.5A 600V Fast Acting, Current-Limiting, Class CC Rejection Cartridge Fuse
FU1-101.18 FU1-101.20 FU1-101.21	3		2A 600V Fast Acting, Current-Limiting, Class CC Rejection Cartridge Fuse
FU1-101.23 FU1-101.24	2	UNV00021007	0.5A 600V Midget,Time Delay, Current Limiting Class CC Rejection Cartridge Fuse
LT1-101.23	1	UNV00023244	GREEN PILOT LIGHT - 230/240VAC NEMA 4/12 IP65
LT1-101.24	1	UNV00023245	RED PILOT LIGHT - 230/240VAC NEMA 4/12 IP65
PW1-101.20	1		Phase monitor relay, 3-phase, socket mount, 190-500 VAC input voltage, SPDT, 10A contact rating, 8-pin
TG1-101.16	1	UNV00019938	3P 200A 600VAC UL1008 MANUAL TRANSFER SWITCH
FB1	8	UNV00018372	30A 600V DIN Rail Mounted Class CC Fuse Holder, UL, 1P, 18 to 8 AWG
GROUND LUGS	1	UNV00008889	AL Universal Terminal, 2 Conductor, 1-Hole, #6 AWG Str-250 kcmil, 3/8" Stud, 2 Screws, Al/Cu Rated
TB1	4	UNV00013974	FEED THROUGH 4 TERMINAL BLOCK-GREY-SCREWLESS
NEUTRAL KIT	1	UNV00018527	NEUTRAL KIT RATED 600V SUITABLE FOR OPERATING CURRENTS 400/600A
XF1-101.24	1	UNV00014250	Control transformer, open core, 50 VA, 1-phase, 240/480 VAC, 120/240 VAC secondary, 50/60 Hz, panel mount

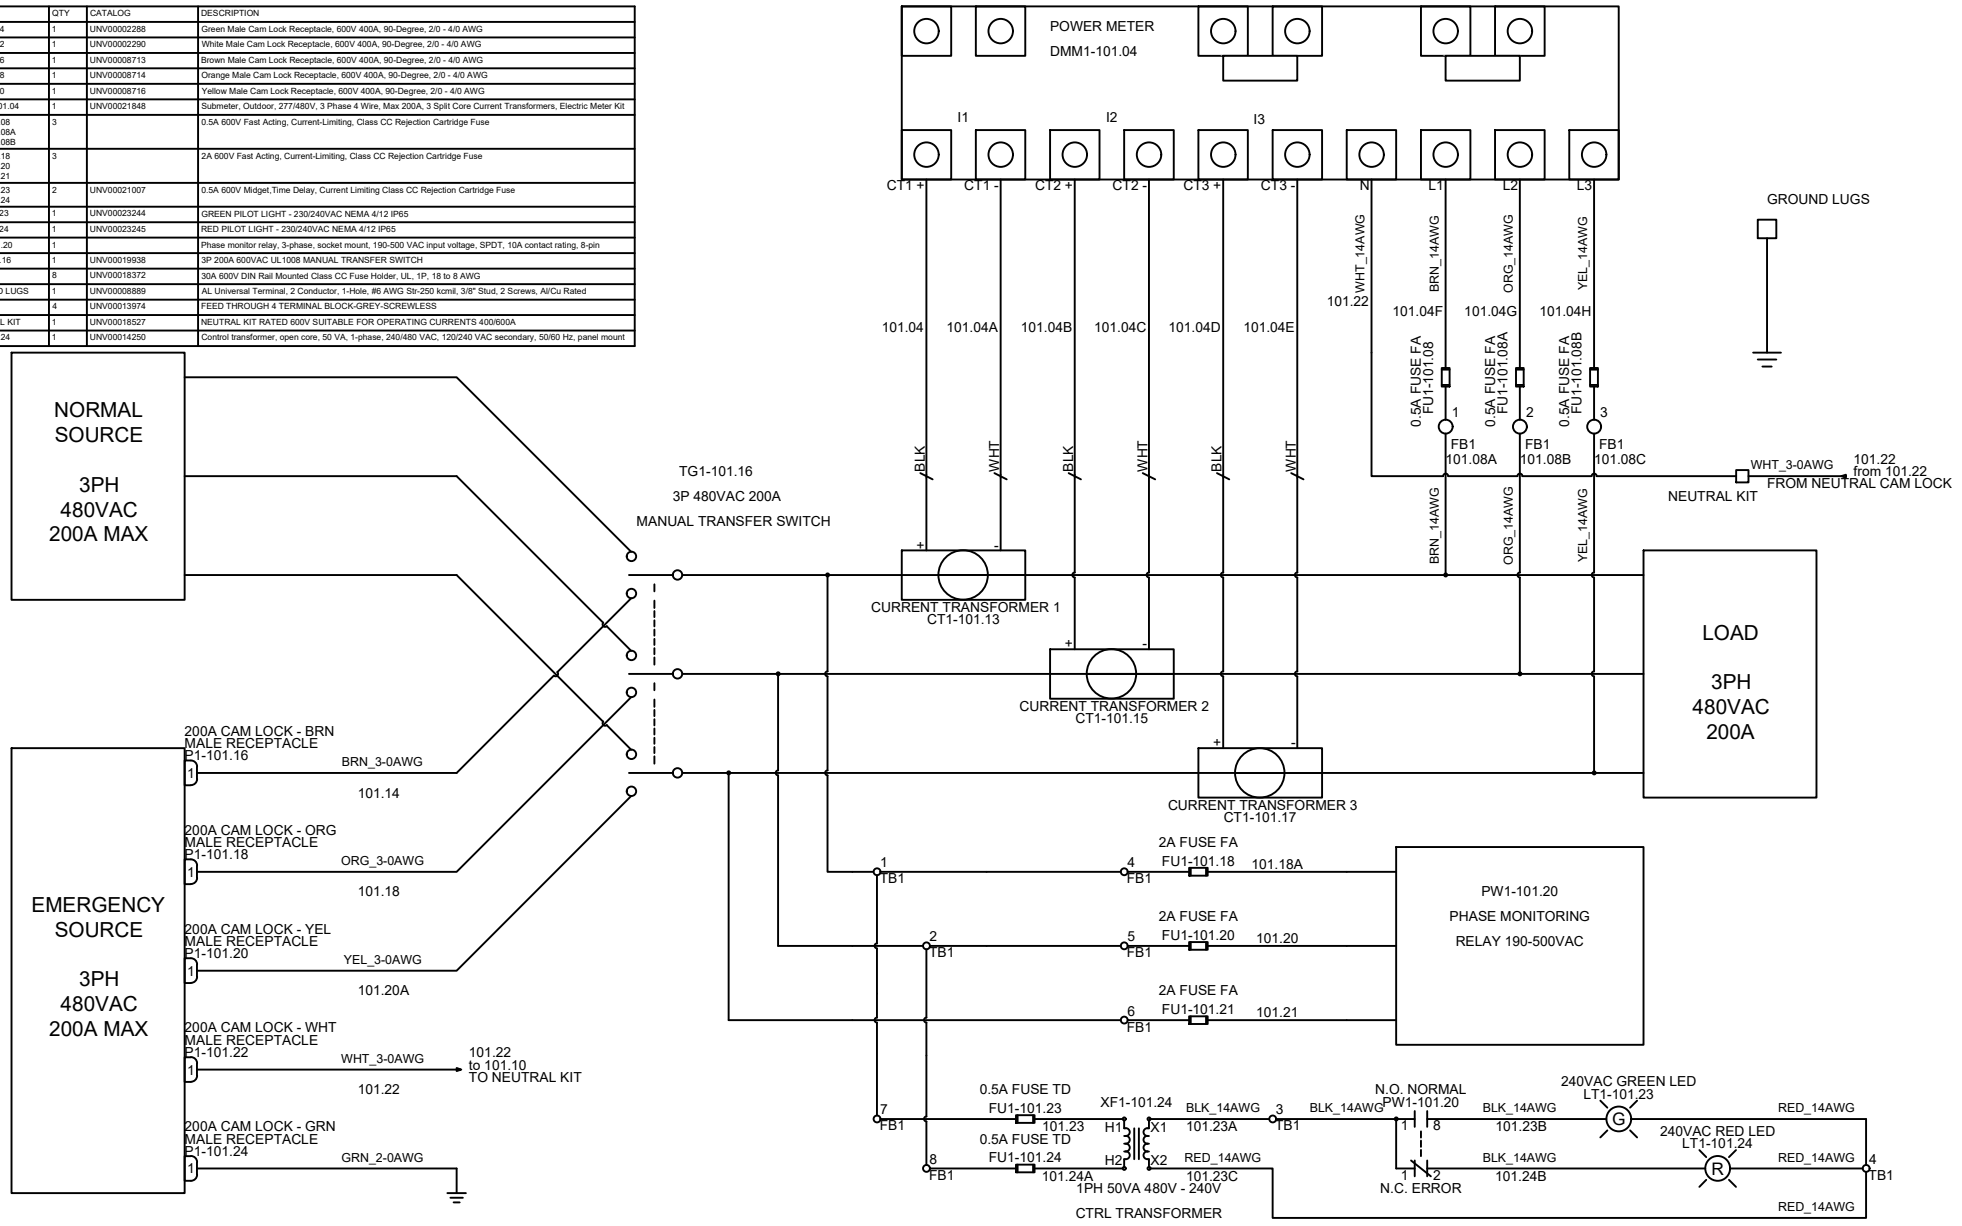

LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE MPD-MTS-3P-200A-480Y.277-N3R-M2 (CUSTOM 305094)		
	DRAWN BY J.Maldonado	DATE 05-08-2026	REV A
	CHECKED BY	SHEET # 1 OF 1	DRAWING # 101