150W Explosion Proof Emergency Only LED Flood Light Surface Mount - Remote Battery Backup - 21,000 Lumens Instruction Manual

Thank you for your purchase of the Larson Electronics EPL-LED-150W-RT-100C-XEMG-113-10C.

WARNING:

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. CRITICAL SAFETY INSTRUCTIONS:

- INSTALLATION SHOULD ONLY BE CONDUCTED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH NEC AND ANY RELEVANT LOCAL BUILDING CODES.
- RISK OF FIRE OR ELECTRIC SHOCK. FIXTURE INSTALLATION REQUIRES KNOWLEDGE OF FIXTURE'S ELECTRICAL SYSTEMS. IF NOT QUALIFIED, CONTACT A QUALIFIED ELECTRICIAN.
- BE CERTAIN ELECTRICAL POWER IS OFF BEFORE AND DURING INSTALLATION AND MAINTENANCE.
- MAKE SURE THE SUPPLY VOLTAGE IS THE SAME AS THE FIXTURE'S RATED VOLTAGE.
- TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR SHARP OBJECTS. SUITABLE FOR DAMP LOCATIONS.

IMPORTANT

READ CAREFULLY BEFORE INSTALLING THIS FIXTURE. SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. THE EPL-LED-150W-RT-100C-XEMG-113-10C MUST BE WIRED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. PROPER GROUNDING IS REQUIRED FOR SAFETY.

WE STRONGLY ENCOURAGE ONLY A LICENSED ELECTRICIAN INSTALL, OPERATE AND MAINTAIN THIS PRODUCT. IF YOU ARE NOT QUALIFIED OR UNFAMILIAR WITH ANY ASPECT OF THIS INSTRUCTION SHEET, CONSULT AN ELECTRICIAN. THERE ARE NO SERVICEABLE PARTS INSIDE.

WARNING: MAKE SURE POWER IS TURNED **OFF** BEFORE STARTING THE INSTALLATION OR PERFORMING ANY MAINTENANCE.

RISK OF FIRE/ELECTRIC SHOCK – DISCONNECT POWER AT BREAKER BEFORE INSTALLING OR SERVICING.
RISK OF PERSONAL INJURY – FIXTURE MAY BECOME UNSTABLE OR DAMAGED IF NOT INSTALLED PROPERLY.
RISK OF BURN – ALLOW FIXTURE TO COOL BEFORE SERVICING.

WARNING:

USER SHOULD BE TRAINED IN THE PROPER USE AND MAINTENANCE OF THIS DEVICE. THIS LINE CORD IS INTENDED TO ALLOW OPERATORS TO EXTEND POWER TO EQUIPMENT WHEN STATIONARY OUTLETS ARE NOT READILY AVAILABLE.

IMPROPER USE OF THIS CORD, PLUG, AND RECEPTACLE CAN LEAD TO SERIOUS INJURIES OR DEATH TO PERSONNEL.

PERIODIC INSPECTION OF THE CORD IS NECESSARY.
THE CORD MUST BE ROUTINELY CHECKED FOR CUTS, BREAKS, OR ANY SEVERE ABRASIONS, AND IF ANY ARE FOUND, THE CORD MUST BE REPLACED BEFORE RESUMING USE.

WARNING

TO AVOID THE RISK OF FIRE, EXPLOSION OR ELECTRIC SHOCK, THIS PRODUCT SHOULD BE INSTALLED, INSPECTED AND MAINTAINED BY A QUALIFIED ELECTRICIAN ONLY, IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL CODES.

TO AVOID ELECTRIC SHOCK:

- BE CERTAIN ELECTRICAL POWER IS OFF BEFORE AND DURING INSTALLATION AND MAINTENANCE.
- PRODUCT MUST BE CONNECTED TO A WIRING SYSTEM WITH AN EQUIPMENT-GROUNDING CONDUCTOR.

TO AVOID EXPLOSION:

- MAKE SURE THE SUPPLY VOLTAGE IS WITHIN THE VOLTAGE RATING.
- ENSURE THE MARKED T RATING IS LESS THAN THE IGNITION TEMPERATURE OF THE HAZARDOUS ATMOSPHERE.
- DO NOT OPERATE IN AMBIENT TEMPERATURES ABOVE THOSE INDICATED ON THE PRODUCT NAMEPLATE.
- DO NOT OPERATE IF THE LENS, CORD, SEALS, HOUSING, RECEPTACLES, ETC. IS CRACKED OR DAMAGED. IF SO, DISCONTINUE USE AND CONTACT MANUFACTURER FOR REPLACEMENT PARTS.
- ALL FASTENERS SHOULD BE PROPERLY SEATED.

WARNING:

USER SHOULD BE TRAINED IN THE PROPER USE AND MAINTENANCE OF THIS DEVICE. IF WIRING OR LAMP REPLACEMENT INSTRUCTIONS ARE NOT FOLLOWED EXACTLY, THE HANDLAMP MAY NOT BE SUITABLE FOR THE HAZARDOUS LOCATION INVOLVED. WHEN HANDLAMP IS CONNECTED TO A POWER SOURCE IN HAZARDOUS AREA, PLUG AND MATCHING RECEPTACLE MUST BE SUITABLE FOR HAZARDOUS LOCATION INVOLVED. WHEN HANDLAMP IS CONNECTED TO POWER SOURCES OUTSIDE OF HAZARDOUS AREA, STANDARD DUTY PLUGS AND RECEPTACLES MAY BE USED.

STANDARD PLUG AND TRANSFORMER MUST ONLY BE CONNECTED TO A RECEPTACLE LOCATED OUTSIDE THE HAZARDOUS AREA!

IMPROPER USE OF THIS HANDLAMP, ASSOCIATED PLUG, RECEPTACLE, AND CORD CAN LEAD TO SERIOUS INJURIES OR DEATH TO PERSONNEL.

PERIODIC INSPECTION OF THE HANDLAMP AND CORD IS NECESSARY.

THE CORD MUST BE ROUTINELY CHECKED FOR CUTS, BREAKS, OR ANY SEVERE ABRASIONS, AND IF ANY ARE FOUND, THE CORD MUST BE REPLACED BEFORE RESUMING USE OF THE HANDLAMP.

THE GLOBE IS MADE OF TEMPERED GLASS. IF THIS GLASS BECOMES SCRATCHED OR CHIPPED IT SHOULD BE REPLACED IMMEDIATELY.

The EPL-LED-150W-RT-100C-XEMG-113-10C from Larson Electronics is a Wall Mounted Explosion Proof Emergency Only LED Light Fixture that produces 21,000 lumens of light capable of illuminating an area 9,500 square feet in size. This fixture only comes on when power is lost. This adjustable Cree LED light fixture is designed for efficient and durable operation and ideal for use in demanding conditions. This is an emergency only fixture and features a remotely mounted emergency backup battery that powers the light for 90+ minutes in the event of an outage. As this light is emergency operation only, power must always be connected and it cannot be on a switch leg.

WIRING

Standard pigtail(flying leads) wiring

We strongly encourage a licensed electrician install this product, in all locations especially in outdoor areas where weatherproofing may be required. Universal voltage driver permits operation at 100V - 277V AC, 50 or 60Hz.

Warning: *Check product label for correct input voltage!*

Attach supply line wires to the appropriate light fixture wires as shown in the diagram ➔



Secure each pair of wires according to the diagram. Utilize a junction box or similar device and take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. Ensure the unit is properly grounded and that wiring is done according to all local and national electrical/building codes.

Standard Cord Cap

This unit comes pre-wired from factory with the selected cord cap. Take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. All outdoor installations and indoor installations near a wet location require the use of a GFCI device for safety, according to the National Electrical Code® (NEC). Ensure the unit is properly grounded.

For supply connections, use wire rated for at least 110°C


Recommended mounting height is 25-40 feet.


MOUNTING

This fixture offers an adjustable surface mounting system that allows this fixture to be mounted to any flat surface including walls and ceilings. A single ½-13 bolt is used to mount the fixture to the surface.

1. Using bolts, washers and nuts provided, attach brackets “A” to both sides of bracket “B”.
2. The LED fixture has 9 holes for a versatile mount option. Select the holes that you would like to use.
3. Brackets “A” will then be bolted to the LED fixture with the remaining bolts and washers.
4. The fixture is now ready for installation.

See Images Below as a Reference

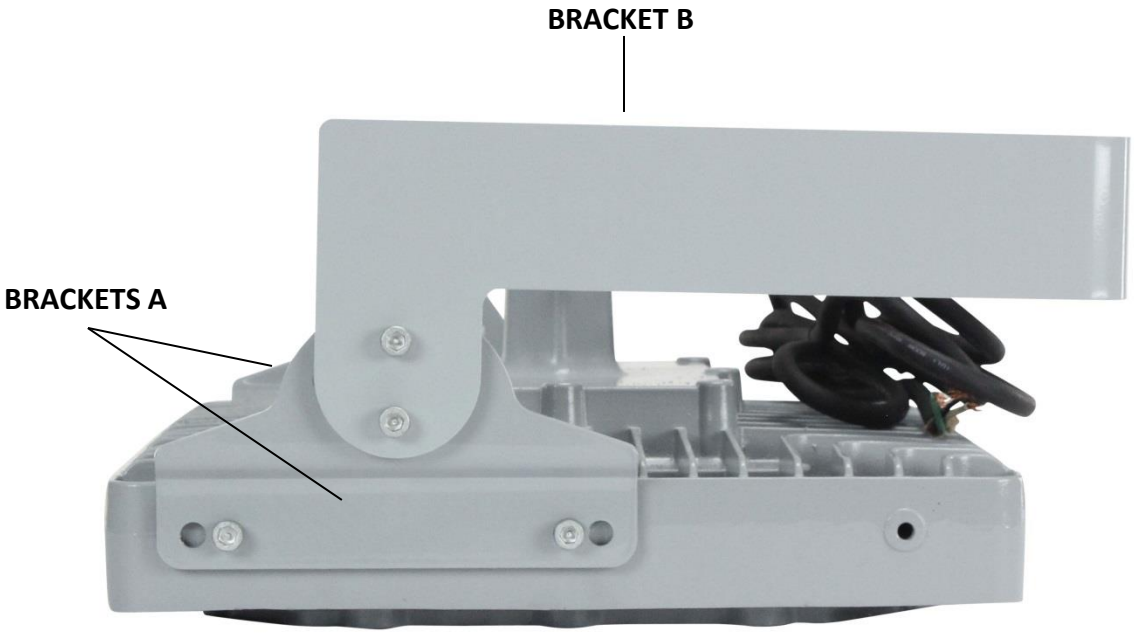

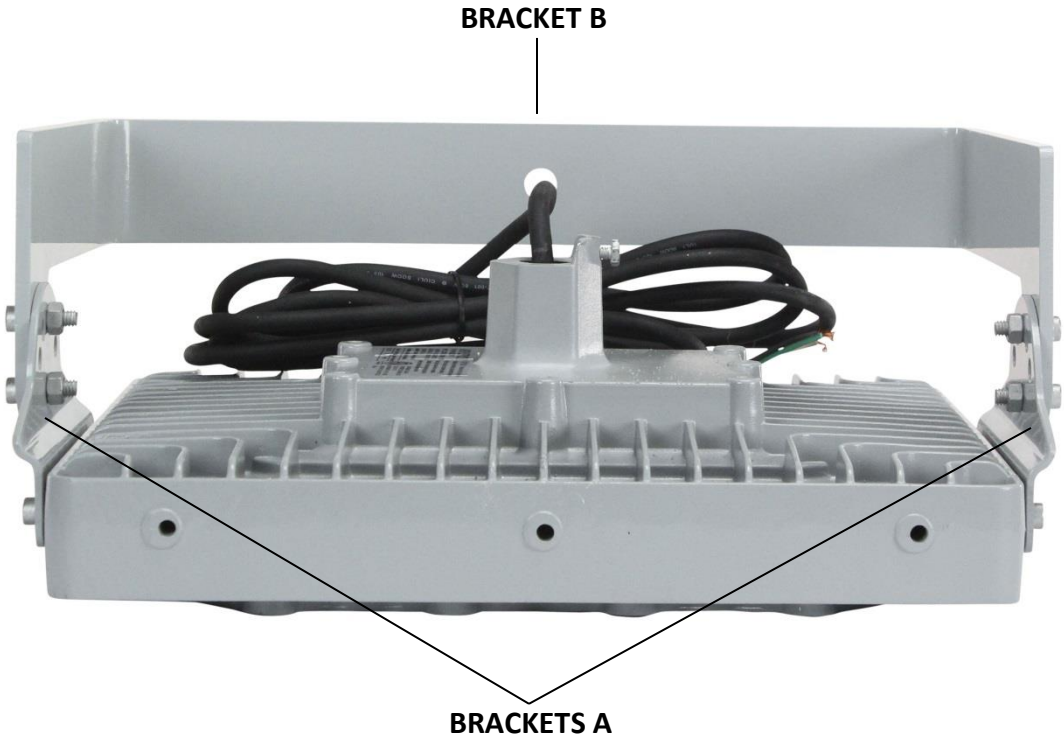

WIRING (see attached wiring diagram)
This unit comes preconfigured with the selected cord cap, and beam configuration. Run cord to a nearby power source and plug light into the correct voltage listed on the product nameplate.

WARNING: The emergency battery backup enclosure and plug are NOT rated for Hazardous Areas. The Emergency Battery Backup enclosure **AND** Cord Cap **MUST** remain **OUTSIDE the Hazardous Area during use!**

Keep emergency battery backup ballast box closed at all times during operation.

Follow all applicable local, state, and National Electrical Code for the hazardous area!

For pigtail connections, see below diagram.



WARNING: CHECK NAMEPLATE FOR PROPER VOLTAGE. DAMAGE FROM IMPROPER VOLTAGE WILL VOID WARRANTY.

MAINTENANCE

Caution: To avoid personal injury, disconnect power to the light and allow the unit to cool down before performing maintenance.

Warning: No user serviceable parts inside of fixture. Risk of electric shock. Removal of the lens will void the warranty.

1. Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on a yearly basis. Frequency of use and environment should determine this. It is recommended to follow an Electrical Preventive Maintenance Program as described in NFPA 70B: Recommended practice for Electrical Equipment.
2. The lens should be cleaned periodically as needed to ensure continued photometric performance. Clean the lens with a damp, non-abrasive, lint-free cloth. If not sufficient, use mild soap or a liquid cleaner.
3. Inspect the cooking fins on the luminaire to ensure that they are free of any obstructions or contamination (i.e. excessive dust build-up). Clean with a non-abrasive cloth if needed.
4. Do not operate if the lens is cracked or damaged. All fasteners should be properly seated.

USE AND CARE

Unauthorized modification may impair the function and/or safety of this device and could affect the life of the equipment. Always check for damaged or worn out parts before using the device. Store it in a secure place out of the reach of children when not in use. Inspect for good working condition prior to storage and before re-use.

REPLACEMENT PARTS

The EPL-LED-150W-RT-100C-XEMG-113-10C is designed to provide years of reliable performance. Should the need for replacement parts arise, please contact Larson Electronics.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.