150W Hazardous Location Integrated LED Fixture
C1D2, C2D1 - IP66/Field Serviceable
Instruction Manual

Thank you for your purchase of the Larson Electronics HAL-PRM-LED-R3 series LED fixture.

WARNING

TO AVOID THE RISK OF FIRE, EXPLOSION OR ELECTRIC SHOCK, THIS PRODUCT SHOULD BE INSTALLED, INSPECTED AND MAINTAINED BY A QUALIFIED ELECTRICIAN ONLY, IN ACCORDANCE WITH ALL APPLICABLE ELECTRICAL CODES.

TO AVOID ELECTRIC SHOCK:

- BE CERTAIN ELECTRICAL POWER IS OFF BEFORE AND DURING INSTALLATION AND MAINTENANCE.
- PRODUCT MUST BE CONNECTED TO A WIRING SYSTEM WITH AN EQUIPMENT-GROUNDING CONDUCTOR.

TO AVOID EXPLOSION:

- MAKE SURE THE SUPPLY VOLTAGE IS WITHIN THE VOLTAGE RATING.
- ENSURE THE MARKED T RATING IS LESS THAN THE IGNITION TEMPERATURE OF THE HAZARDOUS ATMOSPHERE.
- DO NOT OPERATE IN AMBIENT TEMPERATURES ABOVE THOSE INDICATED ON THE PRODUCT NAMEPLATE.
- DO NOT OPERATE IF THE LENS, CORD, SEALS, HOUSING, RECEPTACLES, ETC. IS CRACKED OR DAMAGED. IF SO, DISCONTINUE USE AND CONTACT MANUFACTURER FOR REPLACEMENT PARTS.
- ALL FASTENERS SHOULD BE PROPERLY SEATED.

USER SHOULD BE TRAINED IN THE PROPER USE AND MAINTENANCE OF THIS DEVICE. IF WIRING OR LAMP REPLACEMENT INSTRUCTIONS ARE NOT FOLLOWED EXACTLY, THE LAMP MAY NOT BE SUITABLE FOR THE HAZARDOUS LOCATION INVOLVED. WHEN LAMP IS CONNECTED TO A POWER SOURCE IN HAZARDOUS AREA, PLUG AND MATCHING RECEPTACLE MUST BE SUITABLE FOR HAZARDOUS LOCATION INVOLVED. WHEN LAMP IS CONNECTED TO POWER SOURCES OUTSIDE OF HAZARDOUS AREA, STANDARD DUTY PLUGS AND RECEPTACLES MAY BE USED.

STANDARD PLUG AND/OR TRANSFORMER MUST ONLY BE CONNECTED TO A RECEPTACLE LOCATED OUTSIDE THE HAZARDOUS AREA!

IMPROPER USE OF THIS LAMP, ASSOCIATED PLUG, RECEPTACLE, AND CORD CAN LEAD TO SERIOUS INJURIES OR DEATH TO PERSONNEL.

PERIODIC INSPECTION OF THE LAMP AND CORD IS NECESSARY.

THE CORD MUST BE ROUTINELY CHECKED FOR CUTS, BREAKS, OR ANY SEVERE ABRASIONS, AND IF ANY ARE FOUND, THE CORD MUST BE REPLACED BEFORE RESUMING USE OF THE LAMP.

THE GLOBE/LENS IS MADE OF TEMPERED GLASS. IF THIS GLASS BECOMES SCRATCHED OR CHIPPED IT SHOULD BE REPLACED IMMEDIATELY.

The Larson Electronics HAL-PRM-LED-R3 Hazardous Location Dimmable Integrated Flood Light LED Fixture offers powerful lighting with heavy-duty and energy efficient benefits in Class I, Division 2 rated hazardous locations that contain combustible gases/vapors. This 150-watt LED unit delivers 22,800 lumens and is field serviceable. Available with trunnion, pendant, ceiling, and wall mount installations, the IP66 rated fixture features a 3/4" NPT wiring hub.

Mounting




The HAL-PRM-LED-R3 series LED is available with your choice of ceiling, trunnion, wall, or pendant mount setup. Pre-drilled mount holes are present on the wall, ceiling, and trunnion mount options. Simply mount these to any flat surface capable of supporting the weight of the unit using suitable mounting hardware. Mounting hardware is not provided, but is available from Larson Electronics if needed. Verify light is securely mounted, and near enough to compatible supply power. **For pendant mount option,** there will be a threaded hole at the back of the unit meant to be threaded onto conduit pipe to suspend the light in place. Be sure at least 5 threads are fully engaged, and tighten the set screw against the conduit for added safety.


Always follow all applicable local and national electrical and building codes when installing! Take necessary measures to maintain ratings within the hazardous area as outlined by applicable guidelines and NEC.

Wiring

Warning: Check product label for correct input voltage!

Attach supply line wires to the appropriate light fixture wires as shown in the applicable diagram ➔

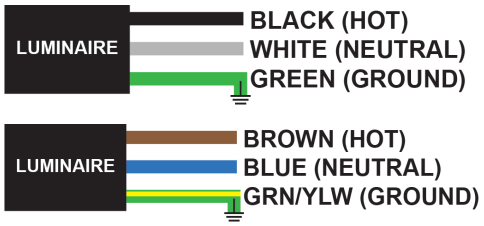





Secure each pair of wires according to the diagram. Utilize a junction box or similar device and take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. Ensure the unit is properly grounded and that wiring is done according to all local and national electrical/building codes. Take necessary measures to maintain ratings within the hazardous area as outlined by applicable guidelines and NEC.

Note: Some lights may be equipped for dimmable control, use the dimmer diagram to identify the positive (+) and negative (-) leads for this control, then connect them to the dimmer switch you intend to use.

Field Serviceability

This LED light fixture is field serviceable. The LED assembly is sealed from the driver box, allowing the driver to be changed without impacting the LEDs. All major internal components can be purchased from Larson Electronics and installed by a licensed electrician with basic tools. With most explosion proof fixtures, the fixture must be returned to the manufacturer for repair work, which presents downtime and long turn around times for repair work. Larson Electronics addresses this issue with products that cater to field serviceability, allowing operators to perform service work without having to return the fixture to the manufacturer in the event of damage or failure.

Maintenance

Caution: To avoid personal injury, disconnect power to the light and allow the unit to cool down before performing maintenance.

1. Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on a yearly basis. Frequency of use and environment should determine this. It is recommended to follow an Electrical Preventive Maintenance Program as described in NFPA 70B: Recommended practice for Electrical Equipment.
2. The lens should be cleaned periodically as needed to ensure continued photometric performance. Clean the lens with a damp, non-abrasive, lint-free cloth. If not sufficient, use mild soap or a liquid cleaner.
3. Inspect the cooling fins on the luminaire to ensure that they are free of any obstructions or contamination (i.e. excessive dust build-up). Clean with a non-abrasive cloth if needed.
4. Do not operate if the lens is cracked or damaged. All fasteners should be properly seated.

Use and Care

Unauthorized modification may impair the function and/or safety of this device and could affect the life of the equipment. Always check for damaged or worn out parts before using the device. Store it in a secure place out of the reach of children when not in use. Inspect for good working condition prior to storage and before re-use.

Replacement Parts

The HAL-PRM-LED-R3 series is designed to provide years of reliable performance. Should the need for replacement parts arise, please contact Larson Electronics.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-877-348-9680 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.