IES INDOOR REPORT
PHOTOMETRIC FILENAME : EPL-MJ-25W-LED-XX-PND.IES

DESCRIPTION INFORMATION (From Photometric File)

IESNA:LM-63-2002
[TEST] 193029
[TESTLAB] RADIANT IMAGING PROSOURCE
[TESTDATE] 2021-04-05 16:17:58
[ISSUEDATE] 2021-04-05 16:17:58
[MANUFAC] LARSON ELECTRONICS LLC
[LUMCAT] EPL-MJ-25W-LED-XX-PND-50K
[LUMINAIRE] CLASS 1 DIV 1 EXPLOSION PROOF LED MASON JAR FIXTURE
[MORE] PENDANT MOUNT, 5000K
[LAMPPOSITION] 0,0
[OTHER] ZVISION 9107GT SYSTEM

CHARACTERISTICS



Lumens Per Lamp	3735.49 (1 lamp)
Total Lamp Lumens	3735.49
Luminaire Lumens	3735
Total Luminaire Efficiency	100 %
Luminaire Efficacy Rating (LER)	150
Total Luminaire Watts	24.9
Ballast Factor	1.00
CIE Type	Semi-Direct
Spacing Criterion (0-180)	1.80
Spacing Criterion (90-270)	1.68
Spacing Criterion (Diagonal)	1.98
Basic Luminous Shape	Rectangular w/Sides
Luminous Length (0-180)	0.10 m
Luminous Width (90-270)	0.10 m
Luminous Height	0.10 m

LUMINANCE DATA (cd/sq.m)

Angle In Degrees	Average 0-Deg	Average 45-Deg	Average 90-Deg
45	36293	29398	34928
55	36241	28183	35363
65	35393	27503	33598
75	34258	26962	33567
85	33964	26858	34800

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EPL-MJ-25W-LED-XX-PND.IES

CANDELA TABULATION

	0.0	22.5	45.0	67.5	90.0	112.5	135.0	157.5	180.0	202.5
0.0	398.71	398.71	398.71	398.71	398.71	398.71	398.71	398.71	398.71	398.71
0.5	400.77	400.89	395.95	399.27	395.65	398.33	392.73	397.74	397.91	398.04
1.0	392.04	402.51	387.93	399.09	387.70	397.13	394.29	391.87	394.14	399.92
1.5	388.46	391.93	381.38	389.18	384.22	394.30	399.32	389.65	400.43	390.51
2.0	386.73	386.09	377.53	384.49	382.13	394.64	396.98	394.54	405.28	388.12
2.5	389.72	382.72	376.59	380.87	382.15	396.08	394.44	404.98	404.53	399.70
3.0	396.31	381.56	376.62	375.56	382.07	395.06	393.58	406.88	404.25	401.07
3.5	401.38	383.31	372.51	369.00	379.38	394.66	396.40	404.42	406.33	394.25
4.0	401.38	385.67	369.75	367.31	377.99	394.95	397.98	402.03	407.77	388.43
4.5	401.21	386.60	371.46	370.40	378.54	393.02	398.16	401.57	407.06	388.42
5.0	399.47	388.26	372.79	372.88	377.99	389.51	398.34	394.96	403.83	393.46
5.5	398.72	386.55	369.88	374.68	377.32	386.00	398.46	389.66	398.22	396.81
6.0	397.02	388.70	366.62	374.80	376.80	385.01	397.84	388.59	392.95	392.23
6.5	392.95	388.99	365.47	373.64	380.55	383.39	398.73	389.15	390.55	388.59
7.0	393.76	385.79	368.21	371.50	384.71	380.38	398.47	390.29	389.46	386.54
7.5	394.89	384.00	373.26	369.79	383.17	378.11	395.96	396.33	393.52	387.02
8.0	392.74	384.07	375.24	371.92	379.68	375.64	391.79	396.96	392.27	386.05
8.5	393.52	384.41	370.45	380.02	374.02	375.71	390.38	394.10	388.32	390.99
9.0	391.32	385.57	364.15	387.06	371.08	373.66	392.33	388.19	383.36	391.84
9.5	381.40	383.93	359.44	390.58	369.84	368.94	392.68	383.36	377.19	387.21
10.0	369.67	379.71	357.74	391.74	368.92	362.54	390.92	382.47	370.98	383.61
10.5	365.12	375.18	357.40	380.02	366.38	357.07	386.29	385.83	368.97	383.90
11.0	365.65	376.84	360.77	364.98	365.61	355.38	379.14	386.01	376.79	389.52
11.5	358.95	369.99	365.76	352.50	364.07	357.69	376.85	378.88	377.31	389.19
12.0	355.42	363.29	363.58	349.04	359.13	361.03	373.79	376.14	382.00	384.50
12.5	354.55	366.87	359.44	350.66	354.82	361.83	371.38	372.71	383.52	381.87
13.0	351.34	369.32	355.20	350.41	353.53	358.37	372.47	368.32	380.64	382.24
13.5	345.82	364.33	351.56	345.47	351.79	352.05	373.18	370.58	377.01	381.09
14.0	342.93	354.40	354.80	340.39	345.13	349.10	365.90	371.56	375.87	373.42
14.5	337.51	350.89	354.28	338.13	337.41	350.10	361.47	370.67	374.79	367.05
15.0	332.47	352.63	352.65	337.55	331.70	350.67	361.30	369.49	372.84	361.74
15.5	331.52	355.67	352.91	334.56	331.16	350.21	361.63	366.06	369.81	359.38
16.0	329.08	357.95	353.91	333.67	331.64	354.68	355.94	360.04	366.40	358.96
16.5	323.90	354.39	347.33	333.20	333.28	363.62	349.56	355.84	361.00	356.40
17.0	316.28	345.49	338.96	328.77	330.64	372.23	343.45	352.66	356.27	351.47
17.5	310.43	334.24	333.86	318.74	325.17	371.40	341.05	347.76	354.78	347.39
18.0	308.38	331.09	332.31	311.73	320.54	364.57	337.23	341.34	353.03	340.55
18.5	308.08	330.46	326.50	309.93	318.74	356.51	332.55	333.50	350.42	332.05
19.0	310.81	332.15	324.80	310.20	319.41	352.97	328.48	328.81	346.84	324.18
19.5	319.12	341.18	327.24	311.04	321.71	353.26	322.68	323.60	341.49	319.16
20.0	320.21	345.03	319.35	309.74	324.18	356.17	316.93	317.81	337.85	315.49
20.5	306.16	329.96	308.72	306.62	322.31	354.10	311.23	312.49	334.62	309.76
21.0	296.16	318.81	311.30	303.44	321.12	344.11	306.89	306.57	331.79	307.27
21.5	301.26	319.92	309.79	306.21	317.26	330.87	304.51	301.99	329.32	310.24
22.0	312.42	324.47	305.89	309.62	314.74	323.52	304.81	299.16	325.22	318.31
22.5	314.77	325.54	304.21	309.37	315.04	318.24	308.38	299.01	321.79	323.43
23.0	305.15	316.22	307.91	302.13	315.91	314.18	309.88	301.66	317.95	318.22
23.5	297.23	310.52	309.19	301.21	315.38	312.72	305.42	305.35	318.87	312.08
24.0	300.31	314.34	310.10	302.39	316.73	310.98	299.11	309.23	317.86	313.25
24.5	306.66	321.32	312.90	302.55	319.44	310.15	295.61	306.08	316.02	317.96
25.0	311.70	328.21	313.19	301.72	319.92	312.64	298.00	296.77	315.41	322.02
25.5	313.51	326.23	318.29	296.59	319.22	315.40	303.44	292.26	317.82	322.42
26.0	314.79	321.17	322.44	295.06	315.19	319.54	305.47	292.39	322.56	317.11
26.5	324.53	321.67	324.26	299.75	309.76	325.95	306.20	296.54	323.05	310.00

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EPL-MJ-25W-LED-XX-PND.IES

CANDELA TABULATION - (Cont.)

27.0	343.76	328.14	328.27	306.32	308.29	325.58	306.35	300.16	324.19	310.40
27.5	373.65	337.60	331.87	313.22	312.56	327.27	306.03	299.87	323.67	317.83
28.0	408.82	346.96	338.73	321.67	320.65	325.77	307.79	300.39	321.54	329.90
28.5	437.96	359.07	349.14	330.38	329.18	326.05	314.89	302.08	320.59	343.59
29.0	444.71	366.23	362.26	341.51	337.25	328.90	323.98	305.69	323.19	356.34
29.5	437.81	373.70	377.81	354.41	344.39	334.83	332.55	311.51	331.37	363.43
30.0	410.89	388.24	393.34	371.25	356.71	337.76	342.75	322.42	340.61	374.02
30.5	389.50	402.69	405.95	394.26	373.86	341.17	352.63	335.27	350.16	393.74
31.0	390.82	416.88	414.61	411.79	394.01	343.82	365.30	346.11	357.32	413.36
31.5	403.27	430.19	422.07	419.45	412.92	347.39	378.41	358.36	364.34	433.09
32.0	420.05	436.16	431.87	409.50	419.76	353.79	393.41	371.61	375.97	442.51
32.5	451.90	440.77	441.92	392.99	414.60	363.88	407.24	387.51	387.32	442.24
33.0	469.34	442.67	451.37	368.05	402.59	380.55	407.58	401.15	399.42	431.11
33.5	452.51	440.57	458.39	359.36	388.83	393.26	395.01	408.50	410.25	415.15
34.0	423.64	439.90	474.99	365.70	377.64	403.23	379.88	405.52	422.96	398.45
34.5	405.57	440.45	489.44	379.83	376.30	412.50	367.79	390.11	434.14	392.81
35.0	406.35	445.44	487.02	404.70	386.13	417.93	366.36	368.48	438.04	403.72
35.5	413.54	457.46	478.16	425.87	404.88	423.39	373.73	359.43	440.67	431.73
36.0	426.80	469.75	487.52	439.80	429.16	431.00	389.36	358.11	450.18	458.38
36.5	441.33	472.39	498.15	460.67	445.85	434.77	413.06	368.08	459.86	472.04
37.0	455.09	469.87	501.06	472.56	453.43	438.17	434.70	391.44	467.45	485.57
37.5	469.98	474.84	502.90	463.64	466.05	445.40	456.44	424.27	475.82	498.53
38.0	485.37	485.71	503.11	440.51	471.57	453.44	470.71	444.35	490.58	504.05
38.5	492.44	492.89	509.05	417.92	464.60	459.81	468.88	462.91	496.99	495.52
39.0	486.79	494.67	513.23	401.76	452.41	460.99	449.18	476.74	484.46	480.59
39.5	474.87	500.83	516.79	394.61	441.05	455.45	422.84	470.63	468.24	465.13
40.0	466.94	513.91	512.79	400.18	432.83	452.37	402.90	448.59	464.89	457.31
40.5	464.69	516.65	503.29	413.65	431.33	449.85	396.85	424.63	465.30	457.19
41.0	470.70	506.84	495.54	428.01	439.93	447.78	398.50	406.88	463.97	468.95
41.5	479.14	501.03	495.56	442.03	449.92	452.55	405.94	402.65	469.49	482.86
42.0	485.35	502.23	496.20	453.10	455.39	460.57	416.83	406.91	477.97	491.01
42.5	486.93	505.88	495.26	464.47	456.25	470.06	431.00	415.41	482.91	493.88
43.0	487.40	507.89	494.83	475.35	459.81	482.60	445.73	423.32	486.85	501.80
43.5	490.17	507.69	497.17	482.37	470.70	484.75	464.32	432.61	495.62	513.64
44.0	496.62	508.26	499.20	484.99	485.45	480.58	479.41	449.16	503.28	522.37
44.5	506.01	508.81	500.02	482.45	493.39	474.27	485.39	466.46	503.40	522.40
45.0	513.48	507.51	502.06	478.65	494.16	471.44	483.45	478.40	498.60	514.52
45.5	518.46	505.50	506.54	475.83	492.18	471.05	481.49	479.62	492.06	506.15
46.0	522.51	504.78	509.68	474.86	490.09	472.74	482.05	477.59	488.70	505.78
46.5	525.03	506.18	511.24	473.09	489.77	473.85	479.74	479.37	486.96	509.27
47.0	526.70	506.13	510.62	469.63	489.25	473.58	471.73	486.98	486.65	511.93
47.5	524.63	503.39	509.06	464.86	486.98	475.25	455.90	489.78	489.47	508.41
48.0	518.26	501.77	507.70	461.93	482.29	479.74	443.30	481.52	496.08	503.76
48.5	511.31	502.42	502.06	463.12	478.68	484.62	437.81	467.46	501.10	503.47
49.0	507.98	504.77	494.81	466.30	478.04	487.45	440.75	457.39	506.18	506.85
49.5	505.93	505.55	489.06	470.08	476.47	486.81	447.54	456.91	508.58	510.24
50.0	504.46	505.61	485.03	473.96	473.86	485.09	455.52	459.76	508.16	510.41
50.5	503.27	505.62	482.80	478.14	470.46	482.85	461.01	459.46	503.88	510.61
51.0	504.59	502.79	482.06	485.00	469.00	481.10	466.01	459.68	499.06	508.05
51.5	507.83	499.25	481.80	493.15	470.55	478.28	470.80	462.13	493.42	506.69
52.0	511.89	495.32	482.40	498.63	474.46	476.12	475.49	467.93	485.86	506.49
52.5	512.96	493.27	483.60	502.80	479.88	472.15	479.56	474.20	481.91	508.22
53.0	511.46	492.53	486.00	503.29	486.18	468.82	480.07	477.30	479.63	510.89
53.5	508.91	492.13	487.75	499.65	492.35	467.25	480.16	478.32	477.22	513.72
54.0	507.01	491.04	488.78	495.15	495.72	468.26	480.88	479.78	475.60	515.62
54.5	505.88	488.84	489.36	491.62	495.13	471.26	481.54	482.13	475.99	517.19

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

55.0	504.96	486.65	488.34	487.81	492.72	472.97	482.22	484.46	477.02	517.83
55.5	502.34	484.78	486.00	482.92	490.35	475.17	480.01	486.95	478.33	519.03
56.0	498.01	483.14	484.11	477.30	486.69	476.83	474.03	489.09	479.84	517.68
56.5	494.44	481.25	481.64	471.95	479.95	477.97	465.15	489.68	482.45	513.37
57.0	491.45	479.00	477.81	469.20	472.46	478.86	457.04	486.66	485.26	506.10
57.5	489.74	476.17	474.22	467.59	464.25	478.96	451.48	480.73	487.09	498.92
58.0	488.40	473.52	471.50	465.74	459.43	477.86	448.97	473.67	486.92	492.72
58.5	487.48	470.85	469.82	463.01	456.68	476.00	446.80	465.45	484.97	487.21
59.0	486.53	469.00	468.94	460.54	454.85	474.11	444.50	455.91	481.91	483.09
59.5	485.29	467.64	468.21	459.85	453.86	471.24	443.25	448.56	477.19	479.31
60.0	485.01	466.90	468.10	460.88	453.78	468.34	442.23	444.84	472.62	476.93
60.5	485.73	465.50	468.74	462.97	455.03	463.83	440.71	443.90	468.19	475.61
61.0	486.41	464.48	469.56	465.75	455.54	458.39	440.06	443.76	464.66	475.08
61.5	486.18	463.54	470.33	468.20	455.43	454.27	440.81	443.72	461.37	475.23
62.0	485.09	462.86	470.69	469.75	455.99	450.67	442.67	443.92	458.29	476.07
62.5	483.51	462.30	471.07	470.53	456.48	449.30	445.33	445.69	456.09	477.37
63.0	481.24	462.14	471.40	470.38	455.74	449.07	447.28	448.19	454.76	478.42
63.5	478.48	462.14	471.10	468.90	454.10	450.39	448.59	450.61	454.34	478.82
64.0	475.90	462.23	470.82	465.77	451.86	452.88	449.56	452.34	454.89	479.10
64.5	473.10	462.09	469.93	461.99	449.31	456.17	449.09	453.27	456.20	478.37
65.0	470.55	462.07	468.94	457.56	446.68	459.05	446.14	454.48	457.46	476.87
65.5	467.59	461.83	467.32	453.73	444.91	461.47	441.98	454.14	459.00	474.32
66.0	464.40	461.15	465.32	450.53	443.81	463.98	437.53	451.78	460.37	471.40
66.5	461.75	459.75	462.77	447.51	441.92	465.08	432.59	446.74	461.54	468.05
67.0	458.63	458.27	460.14	445.26	440.34	464.49	429.27	441.40	461.76	463.86
67.5	455.47	456.69	458.26	443.45	439.36	462.41	427.25	435.96	461.15	459.90
68.0	452.79	455.38	456.59	442.60	437.88	459.10	425.68	432.09	459.70	455.80
68.5	450.48	453.87	455.26	442.31	435.05	455.21	423.64	430.16	458.41	451.80
69.0	449.09	451.66	454.07	442.04	430.99	451.84	421.49	429.05	457.69	448.43
69.5	447.92	449.58	452.63	441.33	427.58	448.61	419.98	428.06	456.86	444.49
70.0	446.69	447.28	451.53	440.21	424.38	446.44	418.87	426.74	455.41	441.54
70.5	445.03	445.23	451.02	438.73	421.26	444.35	417.87	425.59	453.20	439.47
71.0	442.65	443.92	450.42	437.74	419.30	442.97	416.63	423.99	451.33	438.18
71.5	440.05	442.77	449.19	436.24	418.61	442.54	415.75	421.46	449.94	437.36
72.0	436.99	441.84	447.28	435.01	418.60	442.43	415.67	419.08	448.49	437.03
72.5	433.85	440.47	445.76	432.80	418.42	443.18	416.38	417.25	447.73	437.17
73.0	430.83	439.07	444.76	430.20	417.09	444.54	416.51	415.95	447.09	437.39
73.5	427.57	437.59	443.35	427.62	415.33	445.58	415.25	414.37	446.44	437.50
74.0	424.90	436.52	440.94	424.54	414.00	445.99	412.30	412.43	445.72	436.29
74.5	422.02	435.36	439.13	421.11	412.81	445.60	409.25	410.70	444.98	433.82
75.0	419.75	433.82	438.27	417.88	411.29	444.76	405.76	408.08	444.00	430.47
75.5	417.76	432.68	437.29	415.83	409.87	443.12	402.59	405.06	442.54	426.76
76.0	415.59	431.71	436.69	414.35	409.08	440.30	399.36	401.80	441.24	423.31
76.5	413.59	430.95	436.83	412.80	406.52	436.74	395.36	398.63	440.30	419.61
77.0	411.13	429.83	436.51	411.51	402.60	432.96	390.94	396.79	439.42	415.56
77.5	408.56	427.81	435.56	409.27	400.22	430.54	386.44	395.29	437.36	411.77
78.0	406.03	426.37	434.51	406.27	399.55	428.96	383.58	393.55	435.01	408.20
78.5	403.21	425.49	433.21	403.55	399.47	428.03	381.78	391.38	433.60	406.62
79.0	400.83	424.87	432.35	400.79	399.48	427.30	380.88	388.66	433.00	406.38
79.5	398.46	423.83	431.12	398.54	399.05	426.18	380.77	386.45	432.20	406.10
80.0	396.14	422.32	429.16	396.17	398.12	425.76	379.52	384.56	431.68	405.11
80.5	394.21	420.65	426.48	393.40	397.24	425.52	378.49	383.29	430.59	404.30
81.0	392.01	418.67	424.21	391.21	396.79	424.79	378.49	381.51	428.68	404.58
81.5	389.58	416.55	421.54	388.69	396.21	424.44	378.80	378.64	426.72	404.20
82.0	386.97	413.63	418.31	386.44	395.23	423.74	378.47	376.28	424.55	402.71
82.5	384.44	410.19	414.66	383.84	391.81	422.58	376.36	374.74	422.29	400.46

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

83.0	381.79	407.16	411.01	380.63	388.17	420.17	372.77	373.65	418.64	396.44
83.5	378.41	404.46	408.11	377.44	384.77	415.65	368.30	372.33	415.27	391.52
84.0	375.18	401.90	405.52	373.88	381.51	411.13	362.85	369.90	411.38	386.62
84.5	371.78	399.40	403.43	370.60	379.31	406.03	357.75	367.34	406.92	381.60
85.0	368.11	397.43	401.97	367.27	377.17	402.35	353.21	364.15	403.53	377.54
85.5	365.10	396.07	400.55	364.13	375.73	399.75	349.04	360.79	400.10	373.94
86.0	362.26	394.76	399.54	361.54	374.50	398.09	346.09	357.05	397.39	371.59
86.5	360.23	393.71	398.52	359.62	373.60	396.43	343.62	353.12	395.38	369.75
87.0	358.04	392.87	397.08	357.74	372.88	395.27	342.26	350.27	394.04	368.38
87.5	356.34	391.89	395.68	356.23	372.37	395.00	341.61	347.73	393.10	368.06
88.0	354.71	390.83	393.70	354.49	371.50	394.90	341.20	346.02	392.44	367.79
88.5	352.52	389.40	391.55	352.65	370.13	394.79	341.31	344.78	392.00	367.54
89.0	350.21	387.60	389.16	350.49	368.41	394.39	341.61	344.09	391.26	367.35
89.5	346.82	385.81	386.16	347.55	366.34	393.31	341.07	343.97	390.35	367.02
90.0	343.08	383.41	383.22	344.12	363.37	391.51	338.90	343.60	389.19	365.61
90.5	339.14	380.78	380.02	339.67	360.51	388.65	334.81	342.68	387.15	362.55
91.0	334.79	377.54	376.58	335.43	357.35	384.26	330.29	341.17	384.32	358.89
91.5	330.94	374.01	373.38	331.38	354.12	379.96	325.15	338.56	380.59	354.90
92.0	327.31	370.79	370.00	327.12	351.39	375.26	320.92	335.38	376.02	350.63
92.5	323.42	367.38	367.04	323.59	348.41	371.45	316.98	331.45	371.76	346.90
93.0	320.06	364.29	364.10	320.17	345.79	368.34	313.90	327.71	367.88	343.41
93.5	316.02	361.61	361.79	317.01	343.18	365.48	311.07	324.32	364.09	340.80
94.0	312.50	358.67	359.72	314.11	340.61	362.99	308.05	321.05	361.09	338.47
94.5	308.99	356.27	357.22	310.71	338.34	360.26	305.46	318.44	357.73	336.04
95.0	305.17	353.99	354.87	307.76	335.64	357.64	302.88	315.92	354.90	334.23
95.5	301.62	352.09	352.29	304.21	333.43	355.23	300.69	313.77	352.40	332.19
96.0	297.73	349.44	349.66	301.09	331.21	352.60	298.69	311.49	350.05	330.09
96.5	294.09	346.70	347.29	297.77	329.06	350.15	296.66	309.20	347.79	327.99
97.0	291.05	343.82	344.88	294.76	326.99	347.61	294.94	306.95	345.47	325.59
97.5	287.61	340.60	342.28	292.04	324.97	345.45	293.09	304.14	343.53	323.50
98.0	284.16	337.24	339.28	288.79	323.04	343.40	291.33	301.70	341.59	321.27
98.5	280.19	333.81	336.78	286.14	320.94	341.33	289.55	299.12	339.20	319.03
99.0	276.78	330.68	333.97	283.07	318.69	339.61	287.36	296.41	336.97	316.73
99.5	273.49	327.43	331.06	279.68	316.38	337.81	285.04	293.88	334.38	314.28
100.0	269.41	324.02	328.45	276.54	313.88	336.17	282.18	290.85	332.16	312.17
100.5	265.57	321.47	325.48	272.97	311.51	334.06	279.40	288.24	329.54	309.47
101.0	261.46	318.50	322.90	269.69	308.73	331.41	276.45	285.72	326.24	306.84
101.5	257.90	315.60	320.17	266.29	305.70	328.77	273.15	282.89	323.41	304.21
102.0	254.80	313.01	316.66	262.32	302.99	325.21	270.23	280.43	320.19	301.12
102.5	251.49	310.55	313.07	258.59	300.00	321.93	267.38	277.62	317.24	298.16
103.0	248.53	308.30	309.47	254.51	297.15	318.69	265.13	275.09	314.61	294.61
103.5	245.15	305.27	305.63	251.14	294.44	315.38	262.99	272.39	311.54	291.30
104.0	242.30	302.51	301.87	247.83	291.41	312.65	260.73	269.22	308.47	287.96
104.5	239.14	299.62	298.21	244.39	288.86	309.63	258.46	266.28	305.23	284.39
105.0	235.61	296.46	295.42	241.04	285.86	307.06	255.77	263.12	302.17	281.69
105.5	232.17	293.78	292.30	237.42	282.95	304.21	253.17	260.07	299.39	278.97
106.0	228.00	290.77	289.25	234.31	280.16	301.18	250.53	257.15	296.60	276.19
106.5	224.88	287.89	286.46	231.25	277.00	298.44	247.50	253.91	293.77	273.40
107.0	221.64	285.39	283.08	227.98	274.28	295.33	244.89	251.00	290.48	270.37
107.5	217.99	282.54	280.08	225.19	270.89	292.54	242.09	248.02	287.39	267.49
108.0	215.15	280.02	276.87	222.14	267.72	289.58	238.78	245.30	284.39	264.14
108.5	212.12	276.81	273.98	219.46	264.82	286.11	235.69	242.52	280.84	260.77
109.0	209.38	273.58	270.91	216.75	261.43	282.91	232.04	239.11	277.47	257.35
109.5	206.50	270.96	267.52	213.73	258.25	278.70	228.60	235.98	273.96	253.15
110.0	203.40	268.00	264.28	211.11	254.88	275.11	225.11	232.10	270.84	249.46
110.5	201.12	265.16	260.64	208.06	251.71	272.04	221.21	228.65	267.65	245.71

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

111.0	198.69	262.18	257.47	205.38	248.31	268.60	217.97	225.23	264.14	242.54
111.5	196.22	259.47	254.10	202.56	244.51	265.63	214.34	221.58	261.03	239.35
112.0	193.81	256.75	250.26	199.40	241.07	262.65	211.42	218.29	257.57	235.57
112.5	191.18	253.28	246.81	196.79	237.40	259.24	208.13	214.66	254.69	232.04
113.0	188.49	250.26	243.20	193.80	234.16	256.10	205.38	211.34	251.73	228.30
113.5	185.87	246.64	239.73	191.13	230.97	252.70	202.71	208.29	248.34	224.65
114.0	183.34	242.94	236.47	188.30	227.49	249.58	199.76	204.82	245.33	220.97
114.5	180.84	239.38	232.45	185.49	224.46	246.21	197.03	201.79	241.67	216.92
115.0	177.99	235.03	228.80	182.74	220.88	243.08	194.37	198.68	238.28	213.42
115.5	175.46	230.96	224.26	180.04	217.38	239.70	191.43	196.07	234.88	209.55
116.0	172.66	226.72	220.41	177.61	213.84	236.05	188.73	193.46	231.18	206.06
116.5	169.82	222.39	216.25	175.36	210.01	232.78	185.65	190.62	227.85	202.47
117.0	167.29	217.97	211.85	172.65	206.24	229.09	182.72	187.78	223.98	198.28
117.5	164.67	213.44	207.39	170.25	201.80	225.39	179.75	184.41	220.37	194.40
118.0	161.93	209.40	203.02	167.24	198.20	221.82	176.59	181.33	216.71	190.26
118.5	158.90	204.45	198.10	164.63	194.54	217.58	173.64	178.29	212.73	186.56
119.0	156.39	200.44	193.70	162.03	190.68	213.77	170.36	174.87	209.21	183.09
119.5	153.55	196.16	188.80	159.14	187.04	209.54	167.38	171.78	205.19	179.47
120.0	150.80	190.67	184.56	156.45	182.85	205.89	164.50	168.35	201.14	176.34
120.5	148.10	186.01	180.40	154.14	179.16	202.19	161.45	165.39	196.54	172.63
121.0	145.27	181.00	175.79	151.85	175.42	197.91	158.67	162.50	191.30	169.06
121.5	142.53	176.56	171.69	149.71	171.22	193.87	155.62	159.27	186.78	165.26
122.0	139.72	172.19	167.00	147.52	167.61	189.13	152.69	156.63	181.94	160.74
122.5	136.74	167.42	162.76	145.52	163.64	184.71	149.72	153.73	177.84	156.53
123.0	133.77	163.07	158.37	143.17	159.78	179.95	146.24	150.87	173.92	151.67
123.5	130.98	158.15	153.09	140.43	155.30	174.96	143.03	148.04	169.67	147.28
124.0	128.05	152.11	147.79	137.85	150.37	170.14	139.32	145.01	165.68	143.23
124.5	125.24	146.47	141.21	134.75	146.30	165.53	135.93	142.09	160.24	138.64
125.0	121.78	141.11	134.07	132.13	142.37	160.49	132.41	138.34	154.19	134.45
125.5	118.61	134.76	126.73	129.51	137.91	155.86	128.30	134.78	148.02	130.01
126.0	115.32	128.78	119.16	126.73	132.99	149.40	124.89	131.55	141.49	125.78
126.5	110.24	121.35	112.76	124.30	125.01	142.65	121.51	128.14	135.75	120.12
127.0	105.39	115.66	105.90	121.72	117.83	135.24	118.82	125.15	129.09	111.54
127.5	100.59	108.36	98.93	118.90	110.78	128.28	115.97	122.25	122.31	104.55
128.0	96.25	101.29	91.73	115.07	104.93	121.68	110.70	119.42	115.10	98.44
128.5	91.27	94.34	84.36	110.33	99.60	113.43	104.26	114.29	106.76	93.50
129.0	85.05	86.86	78.49	105.33	92.76	106.02	96.42	106.27	99.79	86.71
129.5	80.00	80.61	72.66	98.94	86.69	99.51	90.38	99.16	91.97	79.36
130.0	75.01	73.17	65.48	93.85	81.25	92.52	85.79	93.11	84.12	74.22
130.5	69.35	66.59	59.71	89.22	75.74	86.16	80.19	88.74	75.75	69.02
131.0	62.66	60.94	55.21	83.68	70.10	78.55	73.73	83.47	69.28	63.32
131.5	57.88	55.60	50.71	79.05	63.35	72.37	67.24	76.99	64.43	57.57
132.0	54.69	50.56	45.08	72.78	58.02	67.11	63.13	71.64	57.81	53.86
132.5	46.51	44.37	39.62	67.09	54.84	61.24	59.67	66.38	51.53	48.76
133.0	41.53	38.39	35.79	62.93	47.31	55.89	55.50	61.97	45.78	42.31
133.5	37.67	36.68	31.85	57.69	41.97	49.95	46.62	56.31	38.75	37.13
134.0	33.05	32.85	27.75	51.36	37.93	44.89	41.69	49.47	37.41	33.55
134.5	26.83	28.90	24.06	44.63	35.08	41.32	38.91	43.88	32.58	29.37
135.0	23.92	25.01	20.31	37.40	31.12	36.97	34.68	38.16	27.63	25.33
135.5	21.87	22.11	17.50	37.53	26.11	32.35	28.87	35.67	23.07	21.91
136.0	17.95	19.30	14.62	31.83	22.77	28.02	23.97	30.38	20.02	18.91
136.5	16.45	16.14	12.07	28.24	19.45	24.51	19.32	24.93	17.48	15.21
137.0	13.54	13.35	10.46	25.59	16.19	20.48	17.72	20.67	14.75	12.00
137.5	10.74	10.77	7.92	21.94	13.62	17.56	15.41	17.70	11.84	9.54
138.0	8.58	8.03	5.52	19.58	10.71	14.78	11.60	15.58	9.63	7.36
138.5	5.94	6.12	4.25	16.83	8.35	11.38	10.27	12.99	7.69	5.50

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

139.0	4.79	4.45	2.98	13.53	5.82	9.50	7.27	10.85	6.22	4.10
139.5	2.39	3.03	2.48	11.45	4.22	6.97	5.79	8.66	4.71	2.59
140.0	1.99	2.74	2.22	8.63	2.43	5.01	4.37	6.93	4.07	2.10
140.5	1.83	2.55	2.07	6.57	2.08	3.91	2.41	4.90	3.64	1.85
141.0	1.68	2.31	1.85	3.13	1.98	3.44	2.19	3.49	3.37	1.72
141.5	1.50	2.18	1.72	2.83	1.88	3.19	2.03	3.14	3.02	1.53
142.0	1.39	2.00	1.57	2.63	1.79	2.96	1.81	2.80	2.74	1.37
142.5	1.30	1.86	1.40	2.44	1.65	2.76	1.72	2.50	2.61	1.30
143.0	1.18	1.77	1.33	2.21	1.53	2.63	1.56	2.26	2.38	1.21
143.5	1.06	1.65	1.19	2.03	1.33	2.45	1.50	2.09	2.09	1.15
144.0	1.05	1.57	1.12	1.84	1.17	2.29	1.34	1.97	1.92	1.08
144.5	0.90	1.46	0.94	1.72	1.13	2.20	1.25	1.83	1.80	1.01
145.0	0.89	1.33	0.86	1.58	1.04	2.04	1.17	1.75	1.71	0.99
145.5	0.81	1.24	0.72	1.55	0.93	1.77	1.07	1.65	1.51	0.92
146.0	0.81	1.20	0.70	1.47	0.86	1.63	1.00	1.57	1.46	0.88
146.5	0.65	1.14	0.73	1.39	0.87	1.56	0.89	1.56	1.42	0.80
147.0	0.58	1.02	0.57	1.29	0.78	1.42	0.85	1.39	1.35	0.76
147.5	0.47	1.02	0.58	1.16	0.75	1.30	0.83	1.32	1.29	0.69
148.0	0.42	0.95	0.59	1.09	0.65	1.23	0.76	1.31	1.16	0.66
148.5	0.42	0.90	0.46	0.99	0.63	1.19	0.74	1.25	1.17	0.58
149.0	0.40	0.87	0.45	0.93	0.54	1.12	0.63	1.13	1.10	0.58
149.5	0.37	0.78	0.41	0.84	0.53	1.04	0.59	1.12	1.08	0.52
150.0	0.32	0.72	0.39	0.85	0.48	0.97	0.51	0.98	0.98	0.46
150.5	0.34	0.73	0.40	0.78	0.49	0.96	0.46	0.92	0.90	0.43
151.0	0.28	0.69	0.35	0.75	0.42	0.86	0.45	0.83	0.88	0.40
151.5	0.27	0.66	0.33	0.69	0.42	0.84	0.40	0.77	0.84	0.38
152.0	0.27	0.58	0.29	0.66	0.33	0.79	0.36	0.70	0.75	0.30
152.5	0.27	0.56	0.28	0.64	0.30	0.75	0.35	0.71	0.70	0.29
153.0	0.23	0.50	0.25	0.56	0.29	0.72	0.30	0.67	0.68	0.28
153.5	0.26	0.51	0.28	0.59	0.26	0.66	0.27	0.59	0.66	0.31
154.0	0.24	0.47	0.26	0.54	0.29	0.57	0.31	0.58	0.58	0.23
154.5	0.24	0.50	0.21	0.53	0.25	0.61	0.27	0.57	0.56	0.26
155.0	0.19	0.42	0.24	0.46	0.24	0.56	0.26	0.50	0.48	0.23
155.5	0.21	0.47	0.22	0.52	0.24	0.52	0.16	0.54	0.47	0.23
156.0	0.23	0.40	0.16	0.42	0.19	0.46	0.26	0.49	0.46	0.21
156.5	0.24	0.40	0.19	0.45	0.20	0.44	0.17	0.51	0.45	0.20
157.0	0.24	0.39	0.17	0.47	0.22	0.46	0.20	0.45	0.42	0.21
157.5	0.21	0.38	0.20	0.45	0.19	0.47	0.24	0.45	0.42	0.21
158.0	0.19	0.37	0.20	0.42	0.19	0.45	0.21	0.42	0.41	0.21
158.5	0.20	0.32	0.16	0.43	0.22	0.42	0.14	0.39	0.40	0.19
159.0	0.22	0.35	0.19	0.37	0.22	0.43	0.16	0.38	0.37	0.21
159.5	0.22	0.36	0.19	0.40	0.24	0.46	0.22	0.41	0.39	0.19
160.0	0.22	0.29	0.20	0.40	0.13	0.39	0.21	0.37	0.36	0.17
160.5	0.21	0.36	0.17	0.34	0.21	0.39	0.20	0.38	0.37	0.21
161.0	0.26	0.36	0.17	0.39	0.21	0.39	0.19	0.37	0.37	0.19
161.5	0.22	0.35	0.17	0.36	0.16	0.36	0.19	0.40	0.36	0.15
162.0	0.21	0.34	0.24	0.39	0.19	0.34	0.19	0.35	0.36	0.20
162.5	0.17	0.36	0.12	0.32	0.19	0.37	0.19	0.34	0.37	0.17
163.0	0.19	0.30	0.19	0.34	0.17	0.35	0.20	0.36	0.36	0.17
163.5	0.20	0.31	0.17	0.34	0.13	0.34	0.16	0.34	0.29	0.13
164.0	0.20	0.35	0.19	0.31	0.20	0.28	0.20	0.31	0.33	0.14
164.5	0.19	0.33	0.13	0.32	0.19	0.32	0.16	0.33	0.31	0.17
165.0	0.20	0.34	0.22	0.34	0.19	0.30	0.17	0.32	0.36	0.17
165.5	0.23	0.30	0.16	0.35	0.17	0.35	0.14	0.32	0.35	0.15
166.0	0.19	0.29	0.19	0.30	0.15	0.33	0.16	0.33	0.30	0.15
166.5	0.23	0.30	0.14	0.28	0.12	0.35	0.15	0.32	0.33	0.21

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

167.0	0.14	0.29	0.15	0.28	0.15	0.31	0.21	0.33	0.31	0.15
167.5	0.23	0.28	0.17	0.33	0.20	0.31	0.17	0.32	0.30	0.14
168.0	0.15	0.25	0.10	0.31	0.16	0.29	0.14	0.33	0.34	0.16
168.5	0.16	0.26	0.16	0.29	0.10	0.29	0.14	0.29	0.29	0.13
169.0	0.17	0.26	0.19	0.29	0.19	0.28	0.14	0.29	0.32	0.15
169.5	0.20	0.26	0.17	0.27	0.14	0.30	0.17	0.24	0.28	0.14
170.0	0.19	0.25	0.13	0.25	0.16	0.29	0.19	0.24	0.24	0.17
170.5	0.15	0.26	0.14	0.23	0.12	0.28	0.15	0.25	0.21	0.16
171.0	0.16	0.26	0.15	0.23	0.09	0.26	0.12	0.20	0.26	0.12
171.5	0.16	0.20	0.15	0.27	0.16	0.25	0.20	0.24	0.20	0.19
172.0	0.17	0.22	0.14	0.25	0.11	0.27	0.12	0.25	0.23	0.14
172.5	0.19	0.22	0.14	0.26	0.15	0.25	0.16	0.22	0.27	0.12
173.0	0.21	0.22	0.13	0.14	0.14	0.23	0.11	0.16	0.19	0.12
173.5	0.16	0.21	0.15	0.22	0.16	0.24	0.17	0.21	0.28	0.15
174.0	0.15	0.20	0.10	0.22	0.10	0.21	0.11	0.20	0.19	0.13
174.5	0.14	0.17	0.12	0.20	0.15	0.21	0.10	0.22	0.21	0.19
175.0	0.19	0.16	0.13	0.23	0.10	0.21	0.13	0.19	0.19	0.14
175.5	0.13	0.22	0.12	0.20	0.13	0.20	0.15	0.24	0.19	0.12
176.0	0.16	0.17	0.13	0.19	0.14	0.22	0.12	0.21	0.15	0.13
176.5	0.14	0.20	0.10	0.19	0.14	0.16	0.13	0.22	0.19	0.09
177.0	0.12	0.17	0.12	0.15	0.13	0.21	0.11	0.16	0.15	0.09
177.5	0.12	0.15	0.09	0.21	0.11	0.17	0.12	0.17	0.16	0.10
178.0	0.15	0.16	0.10	0.19	0.09	0.17	0.13	0.21	0.17	0.13
178.5	0.17	0.15	0.11	0.15	0.14	0.14	0.09	0.21	0.14	0.10
179.0	0.19	0.19	0.14	0.16	0.12	0.17	0.12	0.15	0.19	0.11
179.5	0.15	0.15	0.10	0.15	0.13	0.15	0.13	0.19	0.14	0.10
180.0	0.16	0.12	0.13	0.15	0.10	0.16	0.14	0.19	0.15	0.09

Vert. Angles	**Horizontal Angles**						
	225.0	**247.5**	**270.0**	**292.5**	**315.0**	**337.5**	**360.0**
0.0	398.71	398.71	398.71	398.71	398.71	398.71	398.71
0.5	394.96	398.59	396.19	396.10	400.13	397.39	400.77
1.0	394.77	402.72	393.54	397.70	402.63	394.44	392.04
1.5	401.30	395.76	400.77	404.46	402.99	396.65	388.46
2.0	395.33	387.70	405.49	411.54	404.42	396.27	386.73
2.5	386.03	393.40	406.02	416.16	410.25	399.01	389.72
3.0	390.84	403.02	400.75	419.50	417.65	401.55	396.31
3.5	396.43	405.84	399.78	426.62	424.25	400.27	401.38
4.0	390.85	398.49	402.17	430.79	425.96	402.79	401.38
4.5	383.18	395.85	402.72	427.94	426.38	402.23	401.21
5.0	384.13	397.01	410.33	420.92	420.66	398.15	399.47
5.5	392.45	401.38	413.98	413.23	409.28	395.70	398.72
6.0	397.96	404.20	410.33	403.98	399.11	390.62	397.02
6.5	392.18	396.13	405.78	397.92	398.22	387.28	392.95
7.0	387.04	388.15	397.05	392.85	396.89	383.92	393.76
7.5	385.14	385.07	394.61	387.54	392.79	378.68	394.89
8.0	382.80	383.99	398.87	387.08	389.92	375.21	392.74
8.5	388.04	383.99	403.83	386.68	391.71	371.73	393.52
9.0	395.35	384.97	407.59	384.30	394.50	370.05	391.32
9.5	392.10	383.50	404.87	382.69	391.92	363.28	381.40
10.0	382.34	375.87	396.03	379.16	382.62	355.38	369.67
10.5	374.79	367.02	382.10	378.79	373.14	352.00	365.12
11.0	370.63	366.99	371.16	381.19	366.31	347.73	365.65
11.5	372.96	369.00	367.19	381.15	361.31	340.89	358.95
12.0	379.32	369.52	368.75	377.48	358.41	336.89	355.42

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

12.5	384.89	369.05	371.19	369.33	354.82	343.59	354.55
13.0	384.28	370.45	373.38	360.27	352.50	355.13	351.34
13.5	378.29	373.88	373.69	355.72	354.60	358.52	345.82
14.0	366.77	376.21	372.86	352.26	356.97	350.63	342.93
14.5	358.31	375.14	369.75	347.93	355.93	340.06	337.51
15.0	355.96	371.33	365.93	344.52	352.48	336.14	332.47
15.5	354.74	366.74	359.08	339.83	348.98	337.39	331.52
16.0	352.20	361.60	354.66	334.83	348.27	339.64	329.08
16.5	350.53	358.85	350.25	329.33	349.80	337.88	323.90
17.0	351.80	358.78	345.60	327.22	347.98	331.58	316.28
17.5	354.73	356.12	340.55	322.81	343.88	326.39	310.43
18.0	352.15	353.14	335.80	317.57	338.68	321.96	308.38
18.5	341.10	350.60	331.07	312.38	334.78	328.17	308.08
19.0	326.54	346.56	327.80	309.76	332.56	340.18	310.81
19.5	317.28	338.96	324.96	310.44	330.31	337.15	319.12
20.0	311.41	327.86	322.50	315.28	328.14	323.44	320.21
20.5	308.13	315.57	319.41	313.92	313.67	317.51	306.16
21.0	308.00	309.74	316.42	301.01	311.87	311.81	296.16
21.5	312.90	312.51	316.26	296.95	312.79	309.59	301.26
22.0	319.31	315.44	312.95	301.69	311.04	309.57	312.42
22.5	319.88	317.52	310.90	309.50	314.30	312.04	314.77
23.0	311.36	321.12	307.37	304.97	319.07	316.93	305.15
23.5	303.27	330.04	310.26	296.19	314.92	320.06	297.23
24.0	305.91	332.78	310.39	296.27	309.62	320.83	300.31
24.5	310.79	331.10	309.22	304.32	313.88	321.99	306.66
25.0	309.11	330.27	306.98	316.77	321.80	321.15	311.70
25.5	301.50	331.83	304.86	331.90	326.59	322.87	313.51
26.0	291.41	337.10	309.68	340.31	325.81	327.76	314.79
26.5	289.83	341.30	316.22	353.65	326.39	332.93	324.53
27.0	296.44	339.62	322.60	376.48	329.76	338.76	343.76
27.5	307.61	341.28	333.36	410.51	340.31	350.63	373.65
28.0	317.39	346.81	351.12	446.41	358.73	364.27	408.82
28.5	327.81	355.62	365.71	455.75	376.55	381.91	437.96
29.0	339.83	367.42	382.79	443.30	390.06	401.13	444.71
29.5	354.51	381.57	407.62	418.06	404.33	423.76	437.81
30.0	374.85	395.27	427.87	394.66	412.59	431.70	410.89
30.5	391.26	412.28	438.39	374.53	421.08	441.64	389.50
31.0	407.38	425.84	432.20	360.14	439.34	441.31	390.82
31.5	423.16	430.95	420.29	375.17	461.63	441.97	403.27
32.0	432.27	440.98	409.99	401.91	475.50	442.51	420.05
32.5	423.64	447.86	402.36	420.24	475.61	444.91	451.90
33.0	400.25	456.82	402.18	480.84	473.28	453.54	469.34
33.5	375.69	463.48	415.65	493.39	466.39	473.20	452.51
34.0	365.97	477.23	435.42	472.10	458.72	488.92	423.64
34.5	374.72	489.46	453.44	449.18	454.25	500.70	405.57
35.0	398.72	501.80	463.00	439.89	464.46	511.19	406.35
35.5	433.47	515.12	472.45	440.88	481.18	515.66	413.54
36.0	455.58	520.13	485.94	446.66	501.00	515.55	426.80
36.5	481.31	524.17	489.31	458.24	509.56	507.69	441.33
37.0	501.47	521.34	482.87	465.88	516.74	506.27	455.09
37.5	502.49	518.71	472.45	467.95	514.89	519.92	469.98
38.0	484.69	525.49	468.84	470.57	511.28	540.88	485.37
38.5	460.56	528.43	473.50	480.62	510.47	551.80	492.44
39.0	437.39	525.38	487.01	490.34	511.14	545.47	486.79
39.5	422.44	528.87	496.94	494.26	511.75	537.83	474.87
40.0	418.23	535.75	497.80	490.55	515.60	535.31	466.94

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

40.5	428.63	533.13	497.00	482.58	518.70	528.80	464.69
41.0	445.71	528.00	510.10	482.69	519.78	522.96	470.70
41.5	465.09	526.47	525.81	487.17	524.39	516.01	479.14
42.0	478.41	523.63	527.60	497.22	529.95	509.40	485.35
42.5	489.63	521.67	521.86	512.38	535.97	509.42	486.93
43.0	498.36	518.39	519.69	527.01	533.13	512.69	487.40
43.5	506.74	519.59	523.98	533.35	527.01	516.36	490.17
44.0	513.87	525.59	528.31	536.18	524.39	519.58	496.62
44.5	514.49	532.47	530.45	537.06	525.26	523.66	506.01
45.0	510.51	539.57	535.64	539.35	527.01	527.11	513.48
45.5	508.51	548.09	538.04	539.02	532.58	528.89	518.46
46.0	510.85	552.02	542.52	534.76	540.55	528.91	522.51
46.5	516.36	552.68	543.72	528.22	544.59	525.96	525.03
47.0	519.34	551.47	539.79	525.05	544.81	521.07	526.70
47.5	516.00	548.52	534.44	522.87	544.92	517.61	524.63
48.0	508.56	540.77	530.18	520.13	543.83	516.49	518.26
48.5	501.27	536.40	526.80	519.26	537.27	514.61	511.31
49.0	499.41	526.05	524.83	521.55	529.53	511.20	507.98
49.5	502.66	520.86	523.53	525.82	524.39	508.51	505.93
50.0	505.87	518.25	521.45	531.50	519.26	504.47	504.46
50.5	507.32	515.62	520.03	533.89	514.24	501.56	503.27
51.0	509.86	512.54	519.04	532.26	511.52	499.20	504.59
51.5	514.83	508.18	518.50	529.75	510.20	498.69	507.83
52.0	521.59	505.93	517.41	529.53	509.22	498.57	511.89
52.5	527.77	507.02	517.95	532.26	509.77	497.15	512.96
53.0	528.40	509.23	519.59	534.76	511.52	495.81	511.46
53.5	525.68	511.36	519.70	535.54	512.28	495.59	508.91
54.0	523.65	512.22	519.49	527.33	512.94	495.93	507.01
54.5	521.73	513.50	520.58	521.23	513.04	495.92	505.88
55.0	519.73	515.30	521.23	513.35	513.91	494.85	504.96
55.5	517.59	515.42	520.25	506.38	514.36	494.59	502.34
56.0	515.09	514.82	516.97	499.65	514.24	494.63	498.01
56.5	512.95	512.08	512.49	495.63	513.58	494.04	494.44
57.0	509.32	509.21	505.62	492.82	511.40	492.63	491.45
57.5	503.35	506.17	499.07	490.08	507.03	490.97	489.74
58.0	496.96	501.37	492.85	488.82	501.69	489.13	488.40
58.5	490.99	497.30	488.04	489.40	496.01	486.34	487.48
59.0	486.69	494.76	486.18	490.91	491.31	482.65	486.53
59.5	483.30	492.67	485.52	491.26	487.71	478.64	485.29
60.0	480.36	489.30	484.98	490.55	484.55	474.04	485.01
60.5	479.60	485.37	484.88	489.73	482.36	470.22	485.73
61.0	479.84	481.58	484.11	488.99	480.84	466.57	486.41
61.5	480.17	478.02	483.67	488.33	479.75	463.17	486.18
62.0	481.02	476.62	482.91	488.12	478.97	461.83	485.09
62.5	482.24	475.45	482.04	487.36	478.97	461.72	483.51
63.0	482.10	475.81	481.27	486.16	479.85	463.24	481.24
63.5	480.54	477.11	481.60	484.22	480.29	465.39	478.48
64.0	479.18	480.34	481.71	480.48	480.84	468.02	475.90
64.5	477.43	483.63	480.72	476.53	481.60	470.68	473.10
65.0	474.48	486.89	479.09	472.52	481.93	472.92	470.55
65.5	471.60	489.23	476.14	467.72	481.71	473.68	467.59
66.0	468.43	490.47	473.20	463.84	480.84	473.35	464.40
66.5	465.01	490.20	469.92	460.40	478.65	471.64	461.75
67.0	461.24	488.82	465.22	458.23	475.26	468.54	458.63
67.5	457.18	486.74	460.96	456.42	471.12	463.94	455.47
68.0	454.22	483.06	457.36	455.25	466.97	458.91	452.79

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

68.5	451.49	479.10	454.31	454.68	462.28	453.65	450.48
69.0	450.14	474.28	451.36	453.84	458.02	447.66	449.09
69.5	449.23	469.45	448.30	452.44	453.65	442.48	447.92
70.0	447.66	464.46	445.90	449.59	448.85	438.46	446.69
70.5	445.37	460.58	444.69	446.27	445.78	437.01	445.03
71.0	442.26	457.57	444.15	442.81	444.37	437.66	442.65
71.5	438.67	455.92	444.59	438.44	445.47	439.77	440.05
72.0	435.68	456.54	445.02	434.48	447.53	441.37	436.99
72.5	432.91	459.12	445.78	430.75	449.83	443.30	433.85
73.0	430.81	460.88	446.01	427.65	451.36	445.42	430.83
73.5	428.91	461.36	446.66	424.85	453.65	446.86	427.57
74.0	425.95	462.75	446.44	422.20	455.50	447.32	424.90
74.5	422.89	464.15	443.82	420.11	455.94	446.17	422.02
75.0	420.17	464.60	441.20	418.20	454.96	444.05	419.75
75.5	418.35	463.82	439.24	417.04	453.54	441.14	417.76
76.0	416.73	462.35	435.82	415.96	451.57	437.51	415.59
76.5	414.96	459.42	433.43	414.29	448.62	431.76	413.59
77.0	412.64	455.48	430.22	412.31	444.15	427.00	411.13
77.5	410.72	450.49	428.25	409.54	438.03	423.50	408.56
78.0	409.71	445.61	426.24	405.55	432.43	421.43	406.03
78.5	408.23	441.36	424.53	401.99	430.14	420.06	403.21
79.0	405.52	438.06	423.84	398.63	427.92	418.70	400.83
79.5	402.07	435.03	423.47	396.15	425.76	417.75	398.46
80.0	397.70	431.86	421.33	394.09	424.31	417.40	396.14
80.5	393.90	429.32	419.53	391.69	423.97	417.30	394.21
81.0	390.74	428.79	420.29	389.52	424.38	416.82	392.01
81.5	387.84	429.43	420.09	386.87	424.14	415.68	389.58
82.0	385.77	429.45	417.28	384.35	422.67	413.81	386.97
82.5	383.74	428.45	415.39	382.03	421.72	410.70	384.44
83.0	381.84	426.72	413.50	379.18	420.45	407.41	381.79
83.5	379.84	423.50	410.34	376.05	416.98	403.33	378.41
84.0	377.40	418.91	405.73	372.21	412.36	398.98	375.18
84.5	374.84	414.70	400.72	368.95	407.25	395.97	371.78
85.0	371.32	410.93	397.15	365.98	402.58	393.14	368.11
85.5	367.69	407.95	394.70	363.53	398.91	390.63	365.10
86.0	364.01	405.16	392.85	360.92	395.21	388.40	362.26
86.5	359.80	402.49	390.93	358.38	392.84	387.36	360.23
87.0	356.34	400.82	388.82	356.08	391.14	386.93	358.04
87.5	353.16	399.72	387.61	354.08	390.15	386.05	356.34
88.0	350.74	398.84	386.81	352.74	390.01	385.69	354.71
88.5	348.72	398.42	386.29	351.65	390.18	385.48	352.52
89.0	347.21	398.49	386.85	349.62	390.54	384.58	350.21
89.5	346.27	397.70	387.70	346.66	390.32	382.37	346.82
90.0	345.20	394.86	386.78	342.49	388.71	378.87	343.08
90.5	343.31	390.78	383.95	337.38	385.70	375.23	339.14
91.0	340.04	386.11	378.92	332.78	381.04	371.49	334.79
91.5	334.89	381.19	374.04	328.05	375.92	367.39	330.94
92.0	329.83	377.02	368.33	324.30	370.77	363.74	327.31
92.5	324.47	373.95	364.01	320.56	365.51	359.98	323.42
93.0	320.13	370.85	360.66	316.76	361.14	357.01	320.06
93.5	316.45	368.00	357.46	313.13	356.68	354.02	316.02
94.0	312.66	364.75	354.91	308.84	353.31	351.22	312.50
94.5	309.31	361.63	352.50	304.72	350.35	348.49	308.99
95.0	305.34	358.45	349.69	300.17	347.54	345.35	305.17
95.5	301.77	355.72	347.27	296.41	345.05	342.41	301.62
96.0	298.23	353.02	344.59	292.61	343.00	338.98	297.73

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

96.5	294.48	350.11	342.31	288.47	340.92	335.89	294.09
97.0	291.39	347.89	340.10	285.08	339.17	333.10	291.05
97.5	288.37	345.90	337.74	281.55	337.37	330.38	287.61
98.0	285.90	343.22	335.44	278.62	335.57	328.29	284.16
98.5	283.48	340.70	332.76	275.91	333.59	325.61	280.19
99.0	280.86	338.09	330.02	272.80	331.07	323.05	276.78
99.5	278.54	335.75	327.12	269.72	328.30	320.49	273.49
100.0	275.71	332.92	323.89	266.17	325.04	317.77	269.41
100.5	272.91	329.68	321.12	262.57	321.88	314.94	265.57
101.0	269.83	326.59	318.10	258.84	318.48	311.59	261.46
101.5	266.05	322.79	315.17	254.46	314.87	308.54	257.90
102.0	262.31	319.41	312.09	250.53	311.71	305.72	254.80
102.5	258.12	316.25	308.97	246.29	307.56	302.79	251.49
103.0	254.57	312.91	305.82	242.61	304.37	299.88	248.53
103.5	251.25	309.85	301.84	239.19	301.61	296.37	245.15
104.0	247.65	306.75	298.90	235.41	298.92	293.05	242.30
104.5	244.80	304.17	295.66	232.16	296.43	289.79	239.14
105.0	241.96	301.26	293.16	228.89	293.62	286.27	235.61
105.5	239.51	298.04	290.60	226.12	290.85	283.03	232.17
106.0	236.80	295.14	287.60	223.49	287.95	279.86	228.00
106.5	234.53	291.71	284.70	220.69	284.79	277.06	224.88
107.0	232.19	288.42	281.59	218.14	281.73	273.83	221.64
107.5	229.39	284.65	278.27	214.89	278.25	270.53	217.99
108.0	226.71	280.45	274.81	211.56	274.73	267.95	215.15
108.5	223.74	276.94	271.01	208.20	271.38	265.32	212.12
109.0	220.16	273.22	267.49	204.67	267.74	262.10	209.38
109.5	216.65	269.60	263.87	201.61	264.41	258.69	206.50
110.0	212.82	265.87	259.92	198.33	260.65	254.92	203.40
110.5	209.72	262.78	256.38	195.41	257.40	251.40	201.12
111.0	206.52	259.55	252.39	192.54	254.15	247.13	198.69
111.5	203.79	255.84	248.85	189.64	250.44	243.13	196.22
112.0	201.22	252.46	245.51	187.28	246.85	239.12	193.81
112.5	198.55	248.68	241.93	184.69	242.86	234.57	191.18
113.0	196.24	245.33	238.51	182.54	239.21	230.48	188.49
113.5	192.64	241.72	234.69	180.47	235.41	225.98	185.87
114.0	189.20	237.72	231.40	178.16	231.57	222.28	183.34
114.5	186.06	233.89	228.24	175.88	227.79	218.08	180.84
115.0	182.97	229.42	224.48	173.18	223.30	213.39	177.99
115.5	180.36	225.39	220.97	170.71	219.00	209.36	175.46
116.0	177.57	221.09	216.75	168.24	214.57	204.90	172.66
116.5	175.37	216.38	212.44	165.32	209.80	200.70	169.82
117.0	173.06	212.10	208.06	162.67	205.76	196.70	167.29
117.5	170.23	207.34	203.32	159.75	201.39	192.08	164.67
118.0	167.66	202.97	199.18	157.23	197.33	188.06	161.93
118.5	164.82	198.48	194.89	154.77	193.32	183.72	158.90
119.0	161.48	193.63	191.18	152.09	189.21	179.80	156.39
119.5	158.29	189.36	187.29	149.64	185.45	175.56	153.55
120.0	154.93	184.58	183.09	147.07	180.93	170.89	150.80
120.5	152.27	180.17	179.31	144.83	176.62	166.56	148.10
121.0	149.41	175.10	174.91	142.74	172.27	161.63	145.27
121.5	146.67	167.91	170.99	140.31	167.35	156.79	142.53
122.0	144.25	162.22	167.00	138.00	162.58	151.84	139.72
122.5	139.15	156.44	162.23	135.02	157.01	146.37	136.74
123.0	132.94	149.72	157.56	131.95	151.54	141.60	133.77
123.5	127.21	143.38	151.93	128.76	145.80	136.66	130.98
124.0	120.19	135.96	146.94	125.05	140.72	131.19	128.05

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

124.5	110.98	128.15	141.96	121.84	135.71	125.15	125.24
125.0	102.99	120.05	136.48	118.36	129.31	118.49	121.78
125.5	93.57	112.20	131.47	115.43	123.23	112.47	118.61
126.0	83.28	102.44	125.05	112.68	117.43	104.91	115.32
126.5	75.39	91.11	119.74	107.52	112.28	97.74	110.24
127.0	65.80	82.24	114.92	102.54	106.43	90.76	105.39
127.5	58.90	71.40	108.78	98.23	98.87	83.77	100.59
128.0	55.27	60.13	102.21	94.93	92.11	77.83	96.25
128.5	46.32	54.86	94.40	90.72	85.37	70.15	91.27
129.0	42.72	40.80	87.74	84.97	79.84	63.94	85.05
129.5	35.59	33.30	81.61	80.18	73.81	58.37	80.00
130.0	34.64	24.90	75.00	75.51	66.00	54.78	75.01
130.5	30.26	19.08	68.50	69.82	59.84	48.01	69.35
131.0	26.42	15.24	61.91	63.90	54.48	41.26	62.66
131.5	23.54	13.34	57.15	57.51	49.73	37.06	57.88
132.0	21.00	11.82	52.10	54.37	43.98	32.59	54.69
132.5	20.78	10.28	44.83	46.20	36.66	28.86	46.51
133.0	20.70	8.45	37.99	41.34	34.62	24.90	41.53
133.5	19.81	7.30	35.48	37.18	31.20	21.45	37.67
134.0	19.57	6.43	32.22	32.07	27.82	18.91	33.05
134.5	21.14	5.32	27.93	28.19	24.29	16.09	26.83
135.0	21.75	4.40	24.20	25.95	21.01	13.33	23.92
135.5	20.66	3.98	22.08	21.56	18.37	10.46	21.87
136.0	21.42	3.44	19.00	18.84	15.70	8.31	17.95
136.5	21.09	2.41	15.72	17.37	13.17	6.24	16.45
137.0	19.64	2.07	13.22	12.71	10.86	4.39	13.54
137.5	18.41	1.68	10.48	10.41	8.42	3.86	10.74
138.0	15.40	1.45	7.61	7.69	5.93	2.70	8.58
138.5	12.41	1.42	5.50	5.67	4.63	2.36	5.94
139.0	10.51	1.39	4.03	4.47	3.17	2.21	4.79
139.5	7.53	1.37	3.27	2.22	2.88	2.03	2.39
140.0	5.52	1.32	2.93	1.97	2.65	1.92	1.99
140.5	2.51	1.23	2.74	1.85	2.57	1.71	1.83
141.0	2.40	1.17	2.55	1.62	2.39	1.62	1.68
141.5	2.27	1.15	2.34	1.55	2.15	1.52	1.50
142.0	2.13	1.08	2.25	1.43	2.04	1.38	1.39
142.5	1.97	1.01	2.10	1.27	1.92	1.12	1.30
143.0	1.87	0.89	2.00	1.19	1.79	1.10	1.18
143.5	1.77	0.81	1.91	1.07	1.66	0.99	1.06
144.0	1.58	0.79	1.77	1.00	1.60	0.95	1.05
144.5	1.48	0.69	1.66	0.88	1.54	0.84	0.90
145.0	1.41	0.59	1.59	0.88	1.43	0.81	0.89
145.5	1.31	0.60	1.46	0.80	1.34	0.69	0.81
146.0	1.30	0.65	1.36	0.69	1.25	0.65	0.81
146.5	1.15	0.64	1.32	0.69	1.19	0.58	0.65
147.0	1.09	0.65	1.27	0.64	1.10	0.52	0.58
147.5	1.08	0.53	1.21	0.53	1.05	0.47	0.47
148.0	1.00	0.50	1.14	0.56	0.99	0.44	0.42
148.5	0.93	0.46	1.05	0.43	0.89	0.42	0.42
149.0	0.88	0.42	1.06	0.41	0.89	0.39	0.40
149.5	0.81	0.39	1.03	0.39	0.82	0.36	0.37
150.0	0.78	0.38	0.94	0.34	0.75	0.34	0.32
150.5	0.77	0.31	0.93	0.26	0.72	0.29	0.34
151.0	0.65	0.30	0.81	0.32	0.67	0.30	0.28
151.5	0.67	0.32	0.79	0.31	0.58	0.26	0.27
152.0	0.60	0.32	0.73	0.26	0.56	0.24	0.27

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

CANDELA TABULATION - (Cont.)

152.5	0.62	0.29	0.66	0.25	0.54	0.17	0.27
153.0	0.54	0.27	0.60	0.24	0.53	0.23	0.23
153.5	0.52	0.24	0.54	0.24	0.48	0.21	0.26
154.0	0.53	0.25	0.51	0.21	0.47	0.20	0.24
154.5	0.51	0.22	0.57	0.24	0.46	0.17	0.24
155.0	0.49	0.17	0.53	0.22	0.42	0.17	0.19
155.5	0.49	0.20	0.47	0.17	0.40	0.21	0.21
156.0	0.46	0.17	0.47	0.17	0.44	0.15	0.23
156.5	0.42	0.25	0.41	0.19	0.40	0.17	0.24
157.0	0.45	0.20	0.46	0.16	0.36	0.16	0.24
157.5	0.44	0.21	0.45	0.16	0.36	0.17	0.21
158.0	0.42	0.20	0.44	0.25	0.33	0.13	0.19
158.5	0.44	0.21	0.37	0.16	0.36	0.13	0.20
159.0	0.38	0.21	0.40	0.21	0.34	0.16	0.22
159.5	0.36	0.19	0.39	0.17	0.36	0.19	0.22
160.0	0.30	0.23	0.41	0.19	0.37	0.15	0.22
160.5	0.36	0.21	0.35	0.15	0.33	0.15	0.21
161.0	0.36	0.14	0.41	0.19	0.31	0.11	0.26
161.5	0.32	0.19	0.35	0.20	0.33	0.16	0.22
162.0	0.31	0.20	0.39	0.19	0.31	0.15	0.21
162.5	0.34	0.20	0.37	0.19	0.31	0.15	0.17
163.0	0.34	0.22	0.32	0.20	0.31	0.14	0.19
163.5	0.33	0.13	0.37	0.20	0.30	0.17	0.20
164.0	0.36	0.17	0.33	0.19	0.31	0.20	0.20
164.5	0.28	0.14	0.32	0.15	0.31	0.20	0.19
165.0	0.27	0.16	0.30	0.16	0.34	0.15	0.20
165.5	0.29	0.21	0.33	0.14	0.27	0.15	0.23
166.0	0.28	0.14	0.36	0.14	0.31	0.17	0.19
166.5	0.28	0.14	0.28	0.13	0.27	0.12	0.23
167.0	0.31	0.21	0.32	0.16	0.31	0.13	0.14
167.5	0.27	0.15	0.30	0.17	0.23	0.15	0.23
168.0	0.27	0.15	0.27	0.14	0.28	0.11	0.15
168.5	0.29	0.16	0.27	0.15	0.28	0.17	0.16
169.0	0.30	0.17	0.26	0.14	0.28	0.12	0.17
169.5	0.25	0.15	0.27	0.15	0.24	0.14	0.20
170.0	0.24	0.16	0.23	0.14	0.25	0.16	0.19
170.5	0.24	0.16	0.23	0.16	0.23	0.13	0.15
171.0	0.28	0.16	0.25	0.13	0.22	0.09	0.16
171.5	0.22	0.10	0.24	0.13	0.20	0.10	0.16
172.0	0.22	0.14	0.22	0.13	0.26	0.13	0.17
172.5	0.24	0.16	0.21	0.20	0.23	0.11	0.19
173.0	0.20	0.11	0.23	0.13	0.20	0.17	0.21
173.5	0.23	0.15	0.20	0.13	0.23	0.13	0.16
174.0	0.21	0.14	0.26	0.11	0.22	0.10	0.15
174.5	0.24	0.14	0.21	0.16	0.20	0.16	0.14
175.0	0.17	0.14	0.16	0.12	0.23	0.12	0.19
175.5	0.16	0.13	0.24	0.13	0.14	0.11	0.13
176.0	0.16	0.13	0.20	0.13	0.16	0.10	0.16
176.5	0.20	0.15	0.17	0.12	0.16	0.13	0.14
177.0	0.19	0.11	0.15	0.12	0.17	0.14	0.12
177.5	0.19	0.10	0.16	0.09	0.21	0.11	0.12
178.0	0.15	0.09	0.23	0.15	0.13	0.10	0.15
178.5	0.22	0.09	0.13	0.10	0.15	0.11	0.17
179.0	0.21	0.09	0.16	0.13	0.15	0.12	0.19
179.5	0.14	0.08	0.15	0.15	0.15	0.13	0.15
180.0	0.21	0.10	0.15	0.13	0.15	0.12	0.16

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EPL-MJ-25W-LED-XX-PND.IES

ZONAL LUMEN SUMMARY

Zone	Lumens	%Lamp	%Fixt
0-20	136.13	3.60	3.60
0-30	287.87	7.70	7.70
0-40	566.59	15.20	15.20
0-60	1391.86	37.30	37.30
0-80	2303.51	61.70	61.70
0-90	2726.12	73.00	73.00
10-90	2689.01	72.00	72.00
20-40	430.45	11.50	11.50
20-50	814.77	21.80	21.80
40-70	1283.8	34.40	34.40
60-80	911.65	24.40	24.40
70-80	453.13	12.10	12.10
80-90	422.61	11.30	11.30
90-110	657.27	17.60	17.60
90-120	866.85	23.20	23.20
90-130	983.54	26.30	26.30
90-150	1008.22	27.00	27.00
90-180	1008.49	27.00	27.00
110-180	351.22	9.40	9.40
0-180	3734.61	100.00	100.00

Total Luminaire Efficiency = 100.00%

ZONAL LUMEN SUMMARY

Zone	Lumens
0-10	37.12
10-20	99.02
20-30	151.74
30-40	278.71
40-50	384.31
50-60	440.96
60-70	458.52
70-80	453.13
80-90	422.61
90-100	365.29
100-110	291.98
110-120	209.58
120-130	116.69
130-140	23.75
140-150	0.92
150-160	0.19
160-170	0.07
170-180	0.02

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EPL-MJ-25W-LED-XX-PND.IES


COEFFICIENTS OF UTILIZATION - ZONAL CAVITY METHOD

Effective Floor Cavity Reflectance 0.20

RC	80				70				50			30			10			0
RW	70	50	30	10	70	50	30	10	50	30	10	50	30	10	50	30	10	0
0	113	113	113	113	107	107	107	107	96	96	96	86	86	86	77	77	77	73
1	97	90	84	78	91	85	80	74	76	71	67	67	64	60	59	56	54	50
2	86	75	67	59	81	71	63	56	63	57	51	56	50	46	49	44	41	37
3	77	64	54	47	72	61	52	44	54	46	40	47	41	36	41	36	32	28
4	70	56	45	38	65	52	43	36	46	39	33	41	34	29	36	30	26	23
5	63	49	39	31	59	46	37	30	41	33	27	36	29	24	31	26	21	18
6	58	43	33	26	54	41	32	25	36	29	23	32	25	20	28	22	18	15
7	53	39	29	23	50	37	28	21	33	25	19	29	22	17	25	20	16	13
8	49	35	26	20	46	33	25	19	29	22	17	26	20	15	23	18	14	11
9	46	32	23	17	43	30	22	16	27	20	15	24	18	13	21	16	12	10
10	43	29	21	15	40	27	20	14	25	18	13	22	16	12	19	14	11	9

IES INDOOR REPORT
PHOTOMETRIC FILENAME : EPL-MJ-25W-LED-XX-PND.IES

POLAR GRAPH

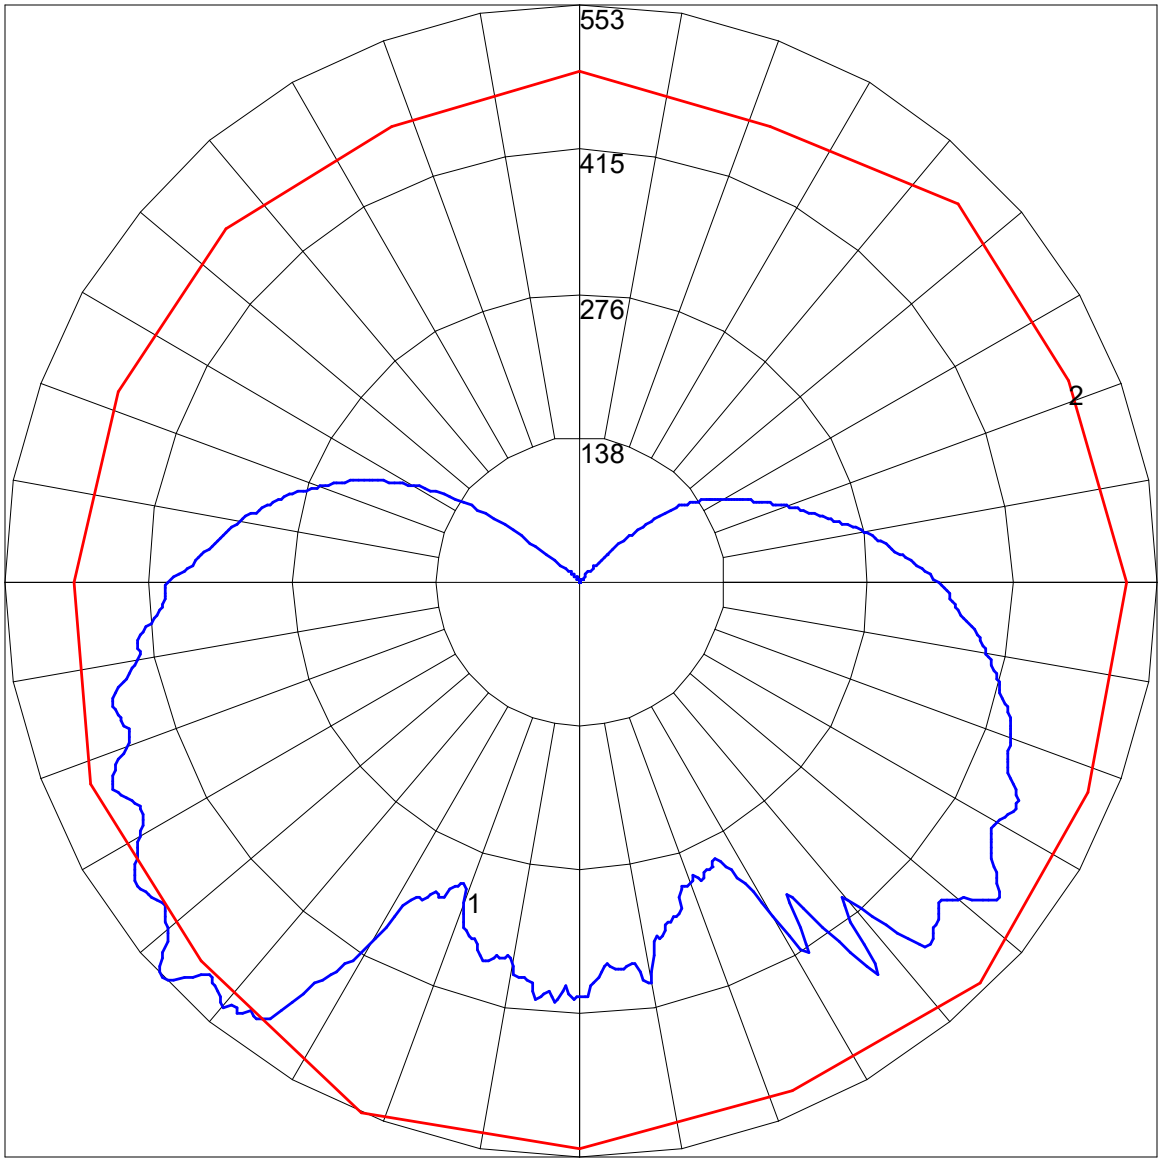

Maximum Candela = 552.68 Located At Horizontal Angle = 247.5, Vertical Angle = 46.5
1 - Vertical Plane Through Horizontal Angles (247.5 - 67.5) (Through Max. Cd.)
2 - Horizontal Cone Through Vertical Angle (46.5) (Through Max. Cd.)

Photometric Toolbox Professional Edition - Copyright 2002-2015 by Lighting Analysts, Inc.
Calculations based on published IES Methods and recommendations, values rounded for display purposes.
Results derived from content of manufacturers photometric file.