

Larson Electronics LLC WWW.LARSONELECTRONICS.COM

9419 E US HWY 75, Kemp, TX 75143 - P: 903-498-3363 F: 903-498-3364 E: sales@larsonelectronics.com

- The necks of these fixtures are filled with Chico in accordance with the C1D1 explosion proof regulation (Chico cannot be seen from $\frac{3}{4}$ " NPT entrance). Plan your Chico fittings and conduit accordingly.
- Calculate and measure required conduit length.
- Feed the power cord (max length of power cord=10') through the conduit and into the junction box.
- Attach the fixture to the conduit using conductive pipe sealant.
- Tighten $\frac{1}{4}$ -20 anti-rotational screw in order to secure the fixture to the conduit.
- Connect power cable conductors as follows:
 - Green to Safety Ground
 - White to Neutral
 - Black to Live
- Restore power and verify operation


INTERFACING TO AN OCCUPANCY SENSOR:

This high bay fixture is ideally suited for control by an occupancy sensor in order to maximize energy savings based on its instant-on behavior and low power consumption. Instructions for connecting the fixture to an occupancy sensor are listed below.

WARNING: To be installed and/or used in accordance with appropriate electrical codes and regulations.

WARNING: Controlling a load in excess of the specified ratings of the occupancy sensor could damage the unit and pose risk of fire, electric shock, personal injury, or death, check load ratings to determine the unit's suitability for your application.

1. **WARNING:** To avoid fire, shock or death, turn off power at circuit breaker or fuse and test that the power is off before wiring.
2. Install occupancy sensor as per sensor instructions to provide desired coverage of area.
3. Connect luminaire wires per wiring diagram as follows: Black lead to load of the occupancy sensor, White lead to the line (neutral), Green lead to earth ground. Multiple fixtures may be connected to a sensor, as long as the rated load of the sensor is not exceeded.
4. Restore power at circuit breaker or fuse.
5. Verify operation of system. If the light will not turn on, check the operation of the fixture and sensor individually, and check that the wiring is done correctly. If the light will not turn off or turns on quickly, see the sensor's installation instructions for further guidance.

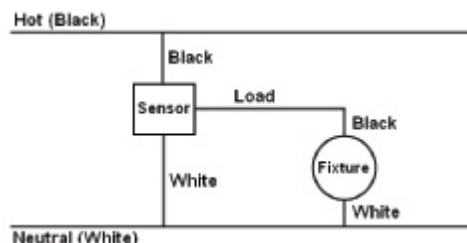



Larson Electronics LLC **WWW.LARSONELECTRONICS.COM**
9419 E US HWY 75, Kemp, TX 75143 - P: 903-498-3363 F: 903-498-3364 E: sales@larsonelectronics.com

MAINTENANCE

CAUTION: To avoid personal injury, disconnect power to the light and allow the unit to cool down before performing maintenance.

WARNING: No user serviceable parts inside of fixture. Risk of electric shock. Removal of the lens will void the warranty.

1. Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on a yearly basis. Frequency of use and environment should determine this. It is recommended to follow an Electrical Preventive Maintenance Program as described in NFPA 70B: Recommended Practice for Electrical Equipment.
2. The lens should be cleaned periodically as needed to ensure continued photometric performance. Clean the lens with a damp, non-abrasive, lint-free cloth. If not sufficient, use mild soap or a liquid cleaner.
3. Inspect the cooling fins on the luminaire to ensure that they are free of any obstructions or contamination (i.e. excessive dust build-up). Clean with a non-abrasive cloth if needed.
4. Do not operate if the lens is cracked or damaged. All fasteners should be properly seated.