High Intensity Bar Clamp Mounted LED Light
10 Watt LED - 9-46V DC - 650 Foot Spot Beam
Instruction Manual

Familiarize yourself with all procedures outlined within this instruction sheet.

WARNING:

READ CAREFULLY BEFORE OPERATING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
CRITICAL SAFETY INSTRUCTIONS:

- To prevent damage to eyesight, never look into spotlight when light is on.
- **DO NOT** shine light into the face of someone else.
- **DO NOT** allow children to handle or operate this spotlight.
- **DO NOT** use this product for other than its intended use.
- **DO NOT** attempt to operate this spotlight if cord, plug, battery, bulb or any part of the spotlight is damaged or corroded.

The BCML-LEDP1X10WRE is shipped with selected Cord Type, Beam configuration, and bar size. Images shown may vary depending upon options selected.

MOUNTING

The BCML-LEDP1X10WRE is mounted on the end of a 4" shaft chrome plated. An aluminum bar clamp is mounted to the shaft to simplify mounting. These bar clamps are not adjustable. The top portion of the mount has a through hole that enables the operator to pass one of two 1/4 - 20 bolts through it and secure that stud with a Nylock nut. The Nylock nut and bolt are provided with the bar clamp. Small machine screws secure the bottom half of the clamp to the top portion. The installer simply affixes the light to the top portion and places the assembly on the rail or bar. The bottom portion is positioned and secure with the machine screws, cinching the clamp tightly to the bar.



POWER

1. The spotlight is designed to work on 9-46 volts DC. This variable voltage allows the light to be connected to consumer vehicles and other non-standard power supplies such as military vehicles and heavy equipment.

   PLEASE NOTE: *There is no difference in light output between voltages.*

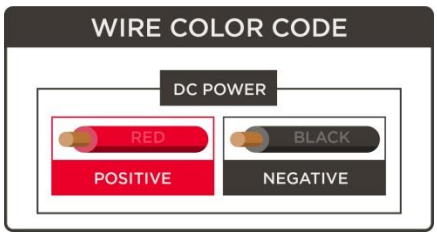

DETACHABLE CORDS

- Power is attached via a weatherproof 2-pin Deutsch connector.
- The cords are detachable by depressing the tab on the top of the connectors. This enables the operator to leave the cord connected to the power source and remove to store the light.
- Additional or replacement cords can be ordered from our website.

*We offer 16 foot coil cords with a cigarette plug (C-16-CC-CP), 21 foot cords with ring terminals (C-21- RT), 16 foot cords with battery clamps (C-16-BC), and 16 foot straight cords with cigarette plugs (C-16 CP).



DEUTSCH CONNECTOR

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.