

## ILSB-LED-30-A

### OPERATION

RED: To + VDC

BLACK: To Chassis Ground (-)

WHITE: For Simultaneous or Alternating Flash

Group 1 Units (Wiring-WHITE connected to RED) will flash together

Group 2 Units (Wiring- WHITE not connected to RED) will flash together

Group 1 Units will alternate with Group 2 Units

Yellow: Flash patterns and synchronization


Connect YELLOW wires of all heads together for synchronization

All units must be set at the same time

Momentarily apply +VDC to YELLOW wire

Once for next pattern

Quickly 3 times for reset

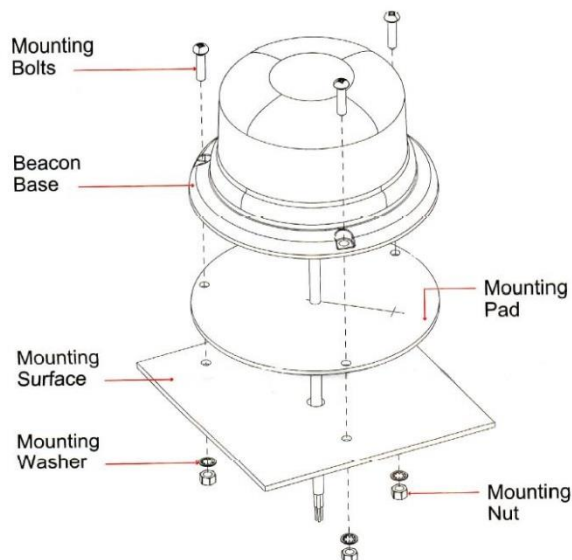

| Flash Pattern # | Flash Pattern    |
|-----------------|------------------|
| 1               | Double R65 (2Hz) |
| 2               | Single (2Hz)     |
| 3               | Quad (2Hz)       |
| 4               | Single           |
| 5               | Double           |
| 6               | Quad             |
| 7               | Quint            |
| 8               | Mega             |
| 9               | Ultra            |
| 10              | Single-Quad      |
| 11              | Single H/L       |

1. Drill holes on mounting surface for wire exit and mounting bolts.
2. Secure beacon onto mounting surface with mounting bolts.