
ILSB-LED-30-M-A

OPERATION

RED: To + VDC
BLACK: To Chassis Ground (-)
WHITE: For Simultaneous or Alternating Flash
Group 1 Units (Wiring-WHITE connected to RED) will flash together
Group 2 Units (Wiring- WHITE not connected to RED) will flash together
Group 1 Units will alternate with Group 2 Units
Yellow: Flash patterns and synchronization
Connect YELLOW wires of all heads together for synchronization
All units must be set at the same pattern
Momentarily apply +VDC to YELLOW wire
Once for next pattern
Quickly 3 times for reset

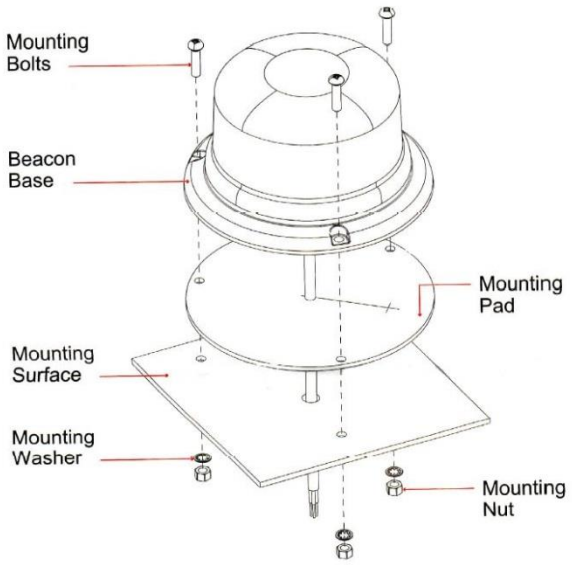

Flash Pattern #	Flash Pattern
1	Double R65 (2Hz)
2	Single (2Hz)
3	Quad (2Hz)
4	Single
5	Double
6	Quad
7	Quint
8	Mega
9	Ultra
10	Single-Quad
11	Single H/L

1. Drill holes on mounting surface for wire exit and mounting bolts.
2. Secure beacon onto mounting surface with mounting bolts.


FLASH PATTERN CHANGE

1. Open Beacon
   Twist dome counter clockwise, then lift down to open.
2. Change Pattern
   Momentarily push red button to change to next flash pattern.

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com

3. Close Beacon
   Twist dome clockwise to close and ensure that it is tight.

MAGNETIC MOUNT

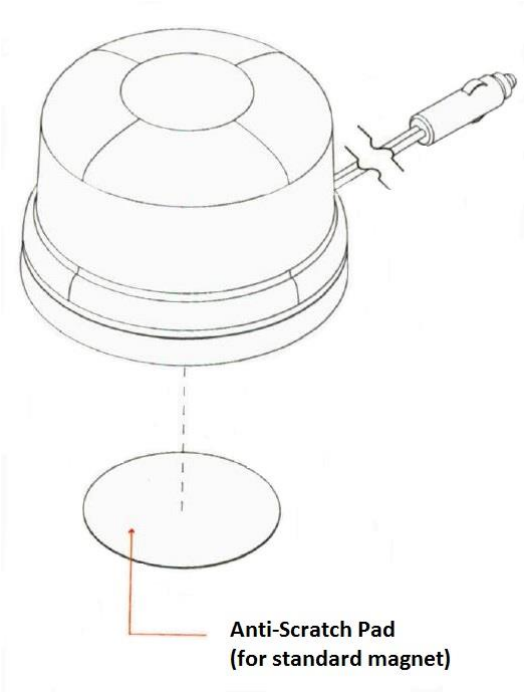

WARNING: It is not recommended to use magnetically mounted warning devise on the outside of vehicles in motion. Usage is at the sole risk and responsibility of the user.

LARSON ELECTRONICS LLC • 9419 E US HWY 175 • KEMP, TX 75143
p: 1-800-369-6671 • intl: 903-498-3363 • f: 903-498-3364 • sales@larsonelectronics.com