


Complete Removal Plug for Post Mount Spotlights Instruction Manual

Do not attempt installation until you are familiar with all procedures outlined within this instruction sheet.

INSTALLATION

This CNC machined PVC plug is designed to fill the hole left behind in the vehicle after the removal of post mount spotlights. The plug is 0.51" in diameter, and tightly fits into 1/2" holes where the shaft of the post mount spotlight has been removed.

Apply a small dab of silicone RTV (not provided) around the plug to ensure a good seal. Firmly press plug into 1/2" hole where the post mount shaft use to reside.

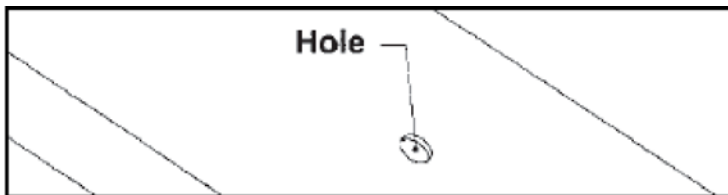

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.