Spare 55 Watt HID Bulb
HL-85-HID-CPR Model Handheld Spotlight
Instruction Manual

Familiarize yourself with all procedures outlined within this instruction sheet.

WARNING:

READ CAREFULLY BEFORE OPERATING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
CRITICAL SAFETY INSTRUCTIONS:

- DO NOT LOOK DIRECTLY AT LIGHTED LAMP.
- NEVER SHINE THE SPOTLIGHT INTO ANOTHER PERSON'S EYES.
- NEVER PLACE THE LIGHT WITH THE LENS FACE-DOWN ON ANY SURFACE WHEN LIT.
- WARNING: RISK OF FIRE OR INJURY TO PERSONS FROM CONTACT WITH HOT LENS.
- KEEP LIGHTED LAMP AWAY FROM COMBUSTIBLES.
- DO NOT TOUCH HOT LENS GUARD OR ENCLOSURE.
- ALLOW LAMP TO COOL PRIOR TO SERVICING.
- NEVER CARRY APPLIANCE BY CORD OR YANK IT TO DISCONNECT FROM RECEPTACLE. KEEP CORD FROM HEAT, OIL, AND SHARP EDGES.

BULB REPLACEMENT

1. Remove the lens/reflector assembly by rotating counterclockwise until fully unthreaded and set aside.




2. Remove the 4 screws holding the top cover in place. The screws are accessed from the underside of light




3. Remove the top cover. Unscrew the ballast and set aside. Ballast can remain connected.



4. Unscrew the two screws holding the bulb.

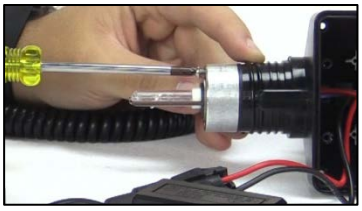


5. Slide the bulb out to expose the two connectors for the HID bulb and disconnect them. Once the wires are disconnected, remove the bulb from the housing.

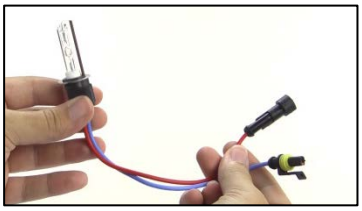

6. Insert the wire leads first and place the new bulb in the same position as the old bulb. Replace the two screws to secure new bulb.



7. Reconnect the two connectors to the new HID bulb.

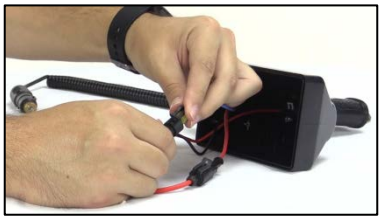

8. Insert the ballast and screws securing it to the housing in the same manner as when first opened.



9. Replace the cover and 4 screws securing it.



10. Replace lens/reflector assembly by rotating clockwise until fully threaded.



Should further information not covered by these instructions be required, please contact Larson Electronics a 1-800-369-6671 or sales@larsonelectronics.com for further assistance.

Please visit LarsonElectronics.com for **Warranty** and **Return** information.