
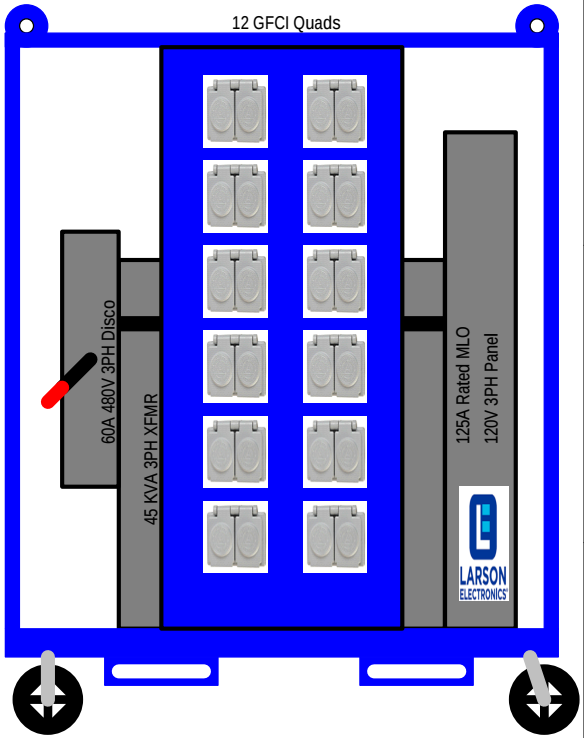


1/8" metal side walls prevent children and unwanted bystanders from accessing the load center or disconnecting equipment during operation and deployment. Three 1/8" hinged doors allow operators to access the disconnect, breaker panel, and receptacles.

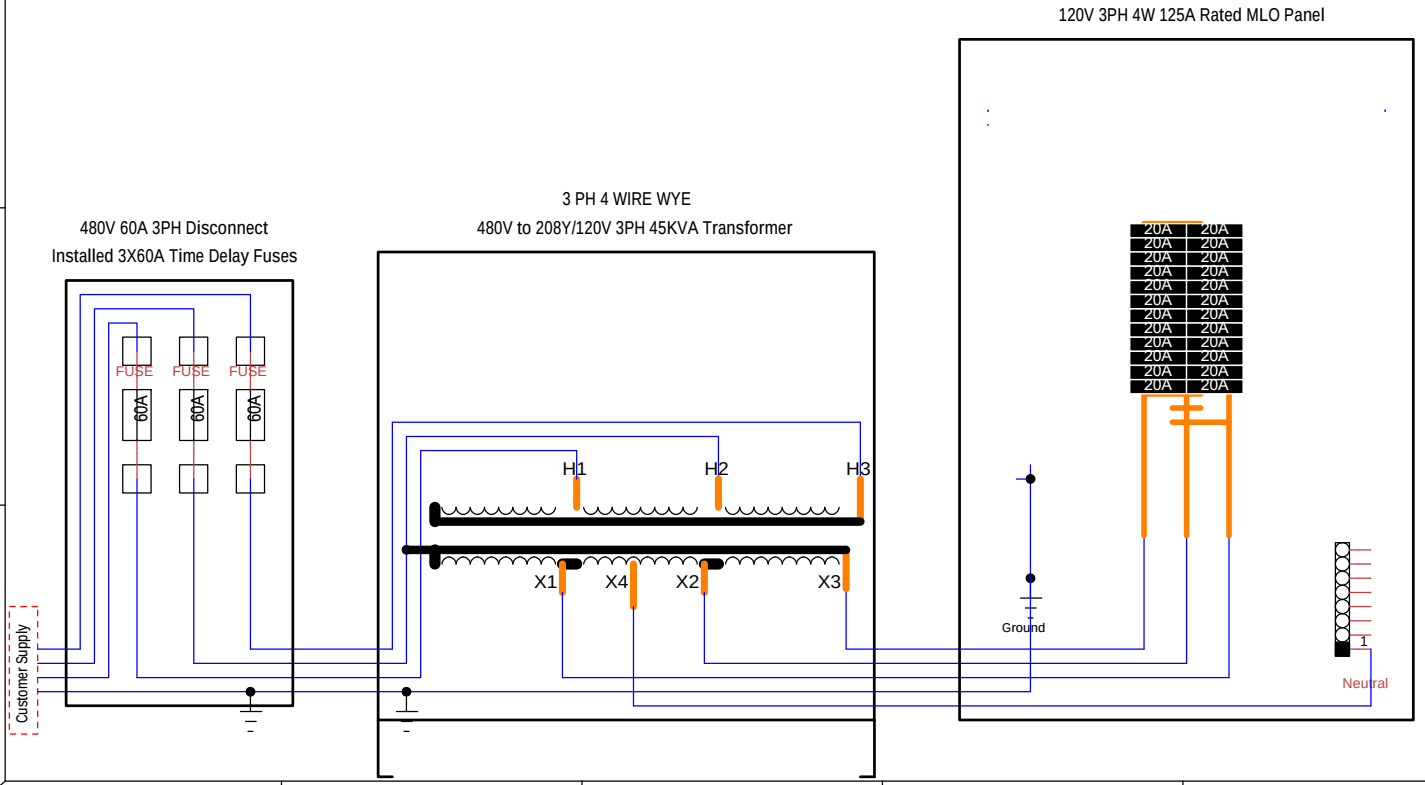

Title	MPD-MRW-480V.3PH-75KVA-MLO-120.3PH-24X120.20A
Author	David Downs
File	\480V 60A 3PH 45KVA 120V 125A 3PH MLO.dsn
Document	
Revision	1.0
Date	10/4/2016
Sheets	1 of 1