Operating Instructions for 60 LED Corded Work Light Model WAL-DL-60LED-M

THANK YOU FOR PURCHASING THE WAL-DL-60LED-M LED WORK LIGHT.
SAVE THESE INSTRUCTIONS.
PLEASE READ THESE INSTRUCTIONS BEFORE USING YOUR WORK LIGHT.

WARNINGS

IMPORTANT SAFETY INSTRUCTIONS WARNING: READ ALL INSTRUCTIONS CAREFULLY SAVE THESE INSTRUCTIONS

WARNING: When using outdoor lights, basic safety precautions should always be followed to reduce the risk of fire, electrical shock, and personal injury, including the following:

Not intended for use in wet areas.
DO NOT use with extension cord near water or where water may accumulate.
Keep plugs and receptacles dry.
For use only on GFCI protected circuits.
Use only three-wire outdoor extension cords 16 AWG or larger that have three-prong grounding plug and receptacles that accept the appliance's plug.
DO NOT use this work light with a 2 wire extension cord
Use only three-wire extension cords rated for outdoor use, such as an extension cord of cord type SEW, SEOW, SEEOW, SEOOW, SOW, SOOW, STW, STW, STOW,

STOW, STOOW, SJEW, SJEOW, SJW, SJW, SJOW, SJOOW, SJTW, SJTOW, OR SJTOOW.

SAVE THESE INSTRUCTIONS

INSTRUCTIONS PERTAINING TO A RISK OF FIRE, ELECTRIC SHOCK, (EXPOSURE TO EXCESSIVE UV RADIATION), OR INJURY TO PERSONS

WARNING: To reduce the risk of FIRE, ELECTRIC SHOCK OR INJURY TO PERSONS:

Lighted lamp may become hot! Light can be used indoor and outdoor.


Check that the sealed push button switch is in the off position before plugging in the work light. Connect light to 120 Volt, 60 Hz power source only. Do not touch hot lens, or enclosure.

Do not remain in light if skin feels warm. Do not look directly at lighted lamp, or direct the light at other persons. Keep lamp away from flammable materials.

INSTALLING THE LIGHT HEAD

Align the center hole in the bracket of the Light Head with the center hole in the Light Stand. Using the included thumb screw, tighten until finger tight.

CAUTION: Do not use any tools to tighten the thumb screw. Finger tight is all that is required. Overtightening may cause damage to the unit.

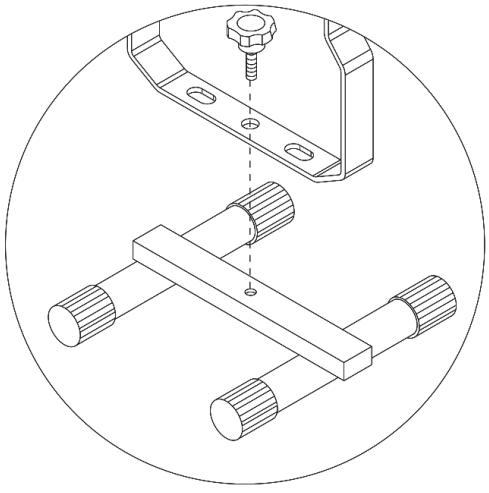

The WAL-DL-60LED-M has a single sealed push button switch located on the back of the light head.

Turning the light on: Press and release the button.

Turning the light off: Press and release the button.