Spare 35 Watt HID Bulb
HL-8x-HID, RL-8x-HID and RUL-8x-HID Models
Instruction Manual

Familiarize yourself with all procedures outlined within this instruction sheet.

WARNING:

READ CAREFULLY BEFORE OPERATING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
CRITICAL SAFETY INSTRUCTIONS:

- DO NOT LOOK DIRECTLY AT LIGHTED LAMP.
- NEVER SHINE THE SPOTLIGHT INTO ANOTHER PERSON'S EYES.
- NEVER PLACE THE LIGHT WITH THE LENS FACE-DOWN ON ANY SURFACE WHEN LIT.
- WARNING: RISK OF FIRE OR INJURY TO PERSONS FROM CONTACT WITH HOT LENS.
- KEEP LIGHTED LAMP AWAY FROM COMBUSTIBLES.
- DO NOT TOUCH HOT LENS GUARD OR ENCLOSURE.
- ALLOW LAMP TO COOL PRIOR TO SERVICING.
- NEVER CARRY APPLIANCE BY CORD OR YANK IT TO DISCONNECT FROM RECEPTACLE. KEEP CORD FROM HEAT, OIL, AND SHARP EDGES.

BULB REPLACEMENT


1. Remove the lens/reflector assembly by rotating counterclockwise until fully unthreaded. Pull the assembly out away from the light to remove.




2. Unscrew the ring holding the bulb in place.




3. Remove the 4 screws holding the top cover in place. The screws are accessed from the underside of light.

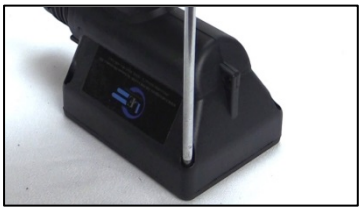

4. Remove the top cover. Set the ballast aside. Make note of how ballast is wired. Remove the 4 screws at the base of the ballast box housing

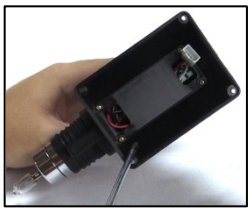


5. Slide back the protective sheath and expose the bullet connectors for the 2 leads coming from the HID bulb. Once the wires are disconnected, you can remove the bulb from the housing.

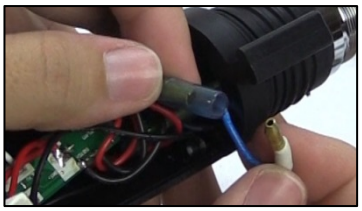


6. Inserting the wire leads first, place the new bulb in the same position as the old bulb.



7. Reconnect the bullet connections.

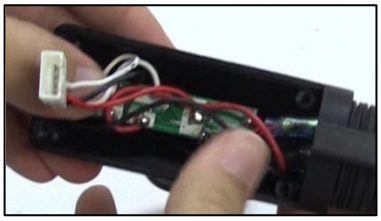

8. Replace the 4 screws at the base of the ballast box.

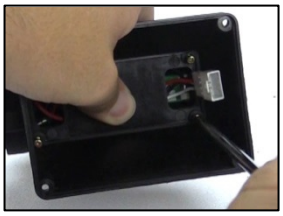

9. Replace the ballast, positioning the wires in the same manner as when first opened. Replace the 4 screws that hold the ballast box cover in place.



10. Replace chrome bulb holding ring.



11. Replace lens/reflector assembly by rotating clockwise until fully threaded.



See video for similar method shown with battery pack instead of ballast. Same method applies.
https://www.youtube.com/watch?v=kdFqHvEWlK0
<< Scan QR code with a smart phone app to view on mobile device.

Should further information not covered by these instructions be required, please contact Larson Electronics at 1-800-369-6671 or sales@larsonelectronics.com for further assistance.

Please visit LarsonElectronics.com for **Warranty** and **Return** information.