Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

DCP-11-2XDP

Multiport AC to DC transformer converts 120-277 volt AC to 12/24 Volts DC up to 106 Watts

Product ID: 46958

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

DCP-11-2XDP Power Converter
Line In Voltage: 100-277VAC @47~63 hz
Line Out: 12VDC @ 11 Amps, 24VDC @ 6.25 Amps
Watts: (2) 53 - 106 Total
AC Input Connector: 1` Pigtail, Straight Blade Plug
DC Output Connector: 1` Pigtail, Two 2 Pin Deutsch Connectors
Protection: Short Circuit/Overload/ Over Voltage
Mounting: Two Screw Slide Notches
Operating Temp: -30 / +70C
Efficiency: 92%

DCP-11-2XDP Features
IP67 Rated Waterproof
Overload,Short Circuit,Over Voltage Protection
UL1012 Compliant
UL60950-1 Compliant
International Lighting Safety Standards Compliant
Output Wire Ending in 2 Deutsch Plugs
Suitable For LED Moving Signs

Special Orders - Special Requirements
Contact us for special requirements

Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
Fax: 1-903-498-3364
E-mail: sales@larsonelectronics.com

The Larson Electronics DCP-11-2XDP Waterproof Power Supply converts commonly used 100-277VAC electrical current to 12VDC @11 Amps. This converter includes a typical straight blade plug on the input end and two 2 prong Deutsch connectors on the output end, allowing multiple devices to be run with this unit. This converter can operate with voltages within the 100-277VAC range and converts it to 12VDC or 24VDC, allowing users to operate equipment like our LED and HID lights that require low voltage DC current from standard AC power.

The DCP-11-2XDP 106 watt power converter provides a safe and effective way for users to tap into and utilize common 100 to 277 Volt AC power sources and convert this current to 12 Volts DC for use with equipment that requires 12 volt electrical power. This unit can be operated with input current ranging from 100 to 277 VAC and will output 12 Volt DC current at 11 amps or 24 Volts DC at 6.25 amps. This power converter features an IP67 rated waterproof design, making it suitable for indoor or outdoor use and includes integral short circuit and overload protection that will shut down the unit in case of faults and overloads to protect the unit and connected equipment from damage.

This converter comes with a straight blade plug on the input lead and a Y connector ending in two 2-pin Deutsch connectors on the output lead, allowing users to run 2 fixtures off one transformer, keeping in mind that the total amperage should ideally be kept within 75% of the unit`s total amperage output and not surpass its 11 amp maximum. Most of our 12 volt LED lights and LEDLB, LEDLB-E, LEDP series lights as well as many of our HID units utilize Deutsch connectors, making this unit "plug-n-play" compatible. This converter will also work with our HML-1, CML-1, CML-2, HML-2, CML-3, HML-3 and CML-4 and HML-4 series spotlights. THIS WILL NOT WORK WITH THE HID GOLIGHT SPOTLIGHTS (GL-3XXXH-X models). If you purchase this transformer with any of our Larson Electronics lights, we will make sure that the connectors are a match.

The small size and wide input voltage range of this unit make it ideal for operating Larson Electronics LED light bars, Halogen Golights and other equipment that requires 12VDC current indoors and anywhere 12 volt DC power is not readily available. Measuring 8.7 inches long by 2.5 inches wide by 1.5 inches deep, this unit weighs less than one pound and is mounted with two conventional screws via slots that allow removal and repositioning simply by loosening the screws.

The DCP-11-2XDP 106 watt converter features full range, universal AC input capability and can be operated with 100 to 277VAC. The unit converts this AC power input to a single 106 watt light or two 53 watt lights at 11 amps with 12VDC output or 6.25 amps with 24VDC output. IP67 rated, this unit is waterproof and suitable for indoor or outdoor applications. Integrally designed protection includes overload, short circuit and over voltage safeguards to prevent overheating and unit damage in case of faults or overly heavy current draw. This unit will shut down when an over current or over voltage condition is encountered and recovers when manually turned back on.

This power converter has a -30 / +70C operating temperature range and is UL UL1012 and UL60950-1 compliant as well as compliant with worldwide safety regulations for lighting. This unit has a 92% conversion efficiency and is suitable for use with moving LED signs and similar LED equipment.

NOTE: In order to obtain the best performance and the longest operational life from these units, it is recommended that you do not exceed 75% of the unit’s output amperage. To determine if this converter suits your desired application, add together the total wattage of the equipment you intend to use with this unit and divide this total by 12 volts to find the total amperage draw that will be placed upon the converter. For example, if you are using our LEDP10W-60E 60 watt LED light, 60 watts divided by 12 volts is 5 amps. This would mean the DCP-11-2XDP is well suited as it would run at slightly less than 50% capacity to produce the necessary 5 amps. Running these units at 100% of their capacity can create excess heat and lead to shortened converter life.


Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

Frequently Asked Questions (FAQ)

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

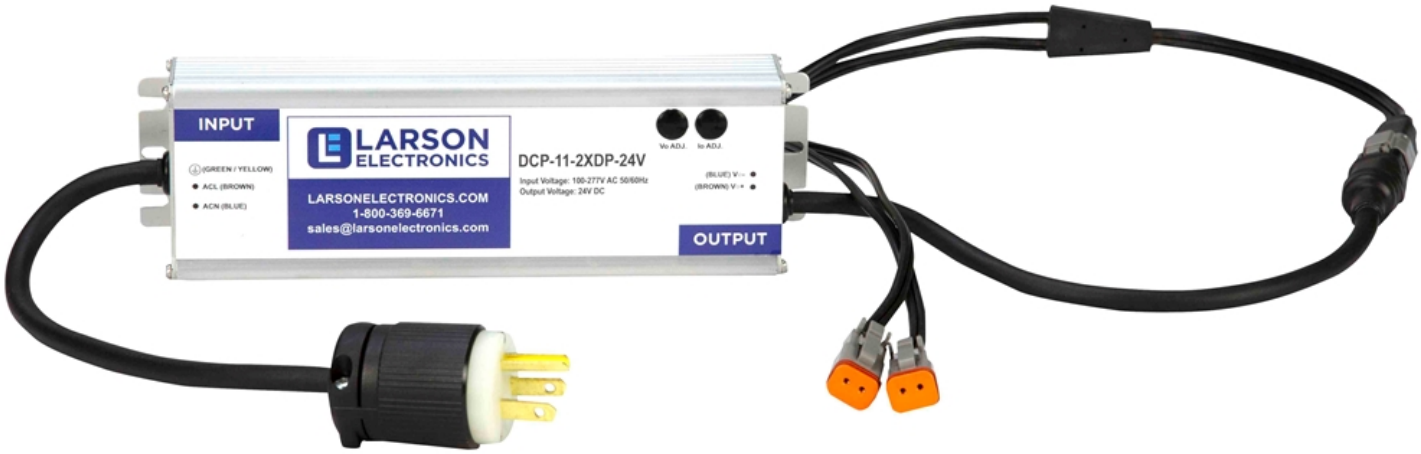





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364





Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.498.3364

DCP-11-2XDP

Product ID: 46958

Export Control Classification Number (ECCN): EAR99

Options:

DCP-11-2XDP-Output Voltage

Example: DCP-11-2XDP-12V

Output Voltage	
-12 VOLTS	-12V
-24 VOLTS	-24V

Links (Click on the below items to view):

- CE Certificate
- Certificate 1, Misc
- Certificate 2, Misc
- Certificate 3, Misc
- Dimensional Drawing 2D
- MSDS (Material Safety Data Sheet
- Operations Manual
- RoHS Certificate (Restriction of Hazardous Substances)
- Wiring Diagram (Oneline)
- HigResPic1
- HigResPic2
- HigResPic3
- HigResPic4
- HigResPic5
- HigResPic6
- HigResPic7
- HigResPic8
- HigResPic9
- HigResPic10
- ISO 9001 Certification
- Business Certificate
- Shipping Time Map