Class I Div 2 Pivoting Light - 4 Foot 2 Lamp - Offshore Fluorescent Rig Light - Meets USCG Specs - Glass Lens Instruction Manual

Thank you for your purchase of the Larson Electronics HAL-48-2L-BMSW-BL.

WARNING:

READ CAREFULLY BEFORE INSTALLING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE. CRITICAL SAFETY INSTRUCTIONS:

- INSTALLATION SHOULD ONLY BE CONDUCTED BY A QUALIFIED ELECTRICIAN IN ACCORDANCE WITH NEC AND ANY RELEVANT LOCAL BUILDING CODES.
- RISK OF FIRE OR ELECTRIC SHOCK. FIXTURE INSTALLATION REQUIRES KNOWLEDGE OF LUMINAIRES ELECTRICAL SYSTEMS. IF NOT QUALIFIED, CONTACT A QUALIFIED ELECTRICIAN.
- BE CERTAIN ELECTRICAL POWER IS OFF BEFORE AND DURING INSTALLATION AND MAINTENANCE.
- MAKE SURE THE SUPPLY VOLTAGE IS THE SAME AS THE RATED LUMINAIRE FIXTURES VOLTAGE.
- TO PREVENT WIRING DAMAGE OR ABRASION, DO NOT EXPOSE WIRING TO EDGES OF SHEET METAL OR SHARP OBJECTS. SUITABLE FOR DAMP LOCATIONS.

IMPORTANT

READ CAREFULLY BEFORE INSTALLING THIS FIXTURE. SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. THE HAL-48-2L-BMSW-BL MUST BE WIRED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. PROPER GROUNDING IS REQUIRED FOR SAFETY.

WE STRONGLY ENCOURAGE ONLY A LICENSED ELECTRICIAN INSTALL, OPERATE AND MAINTAIN THIS PRODUCT. IF YOU ARE NOT QUALIFIED OR UNFAMILIAR WITH ANY ASPECT OF THIS INSTRUCTION SHEET, CONSULT AN ELECTRICIAN. THERE ARE NO SERVICEABLE PARTS INSIDE.

WARNING: MAKE SURE POWER IS TURNED **OFF** BEFORE STARTING THE INSTALLATION OR PERFORMING ANY MAINTENANCE.

RISK OF FIRE/ELECTRIC SHOCK – DISCONNECT POWER AT BREAKER BEFORE INSTALLING OR SERVICING.
RISK OF PERSONAL INJURY – FIXTURE MAY BECOME UNSTABLE OR DAMAGED IF NOT INSTALLED PROPERLY.
RISK OF BURN – ALLOW FIXTURE TO COOL BEFORE SERVICING.

WIRING


Standard pigtail(flying leads) wiring

We strongly encourage a licensed electrician install this product, in all locations especially in outdoor areas where weatherproofing may be required. Universal voltage driver permits operation at 120V - 277V AC.

Warning: *Check product label for correct input voltage!*

Attach supply line wires to the appropriate light fixture wires as shown in the diagram ➔

Secure each pair of wires according to the diagram. Utilize a junction box or similar device and take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. Ensure the unit is properly grounded and that wiring is done according to all local and national electrical/building codes.

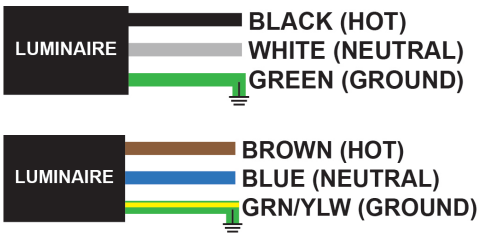

The Larson Electronics HAL-48-2L-BMSW-BL Hazardous Area Fluorescent Light Fixture is NRTL Listed for United States and Canada Class I Division 2 Groups A, B, C and D - NRTL Certified to UL 1598A listed, has a T4A temperature rating and ideal for hazardous locations where flammable chemical/petrochemical vapors may be occasionally encountered. This hazardous location light carries a United States Coast Guard approval, making it ideal for applications such as oil rigs, ships, offshore applications, petrochemical, manufacturing, chemical storage, and water treatment centers.

MOUNTING

Each L bracket is cinched to the bracket mounting peg on each side of the light. The angle of the bracket is set by tightening two bolts on either side of the bracket. The bolts act as a set screw. The bracket itself is mounted via a single bolt hole at the top the bracket. There are two brackets. Once the brackets are mounted to a surface (ceiling, floor or wall), the light fixture can be pivoted by loosening the that hold the bracket to the mounting peg. This fixture allows 45° of pivot from the 90° point.

LAMP REPLACEMENT

- Open latches holding fixture lens. Keep hold of lens and remove once loose.
- Remove old bulb(s) and replace with matching bulbs compatible to fixture.
- Replace lens and close latches to secure.

MAINTENANCE:

This light fixture provides low maintenance service. Electrical and mechanical inspection of all components must be performed on a regularly scheduled basic, determined by the environment and frequency of use. It is recommended that inspection be performed a minimum of once a year.

1. Perform visual, electrical, and mechanical inspections on a regular basis. The environment and frequency of use should determine this. However, it is recommended that checks be made at least once a year. We recommend an Electrical Preventive Maintenance Program as described in the National Fire Protection Association Bulletin NFPA No. 70B: Recommended Practice For Electrical Equipment Maintenance (www.nfpa.org).
2. Visually check for undue heating evidenced by discoloration of wires or other components, damaged parts, or leakage evidenced by water or corrosion in the interior.
3. Electrically check to make sure that all connections are clean and tight.
4. Mechanically check that all parts are properly assembled.

Clean surfaces with a mild soap and water. Do not use abrasive materials such as scouring pads or powders, steel wool or abrasive paper. Unauthorized modification may impair the function and/or safety of the light fixture and could affect the life of the equipment. Always check damaged or worn out parts before using the unit.

TROUBLESHOOTING

Most failures experienced are due to improper installation.
Therefore, most failure issues can be corrected by checking that:

- Wires are properly clamped into terminals.
- Installation is done according to the wiring diagram.
- Proper polarities and load maximums are observed.

USE AND CARE

Unauthorized modification may impair the function and/or safety of this device and could affect the life of the equipment. Always check for damaged or worn out parts before using the device. Store it in a secure place out of the reach of children when not in use. Inspect for good working condition prior to storage and before re-use.

REPLACEMENT PARTS

The HAL-48-2L-BMSW-BL is designed to provide years of reliable performance. Should the need for replacement parts arise, please contact Larson Electronics.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.

IMPORTANT

READ CAREFULLY BEFORE INSTALLING THIS FIXTURE. SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. THE HAL-48-2L-BMSW-SS-FLGM-BL-UVC MUST BE WIRED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. PROPER GROUNDING IS REQUIRED FOR SAFETY.

WE STRONGLY ENCOURAGE ONLY A LICENSED ELECTRICIAN INSTALL, OPERATE AND MAINTAIN THIS PRODUCT. IF YOU ARE NOT QUALIFIED OR UNFAMILIAR WITH ANY ASPECT OF THIS INSTRUCTION SHEET, CONSULT AN ELECTRICIAN. THERE ARE NO SERVICEABLE PARTS INSIDE.



WARNING: MAKE SURE POWER IS TURNED **OFF** BEFORE STARTING THE INSTALLATION OR PERFORMING ANY MAINTENANCE.

RISK OF FIRE/ELECTRIC SHOCK – DISCONNECT POWER AT BREAKER BEFORE INSTALLING OR SERVICING.
RISK OF PERSONAL INJURY – FIXTURE MAY BECOME UNSTABLE OR DAMAGED IF NOT INSTALLED PROPERLY.
RISK OF BURN – ALLOW FIXTURE TO COOL BEFORE SERVICING.

UV Warning

WARNING: ULTRAVIOLET LIGHT IS HARMFUL TO EYES AND SKIN. DO NOT STARE DIRECTLY INTO THE ULTRAVIOLET BEAM WITHOUT WEARING PROTECTIVE GEAR TO PROTECT EYES FROM LONG TERM DAMAGE. UNPLUG LAMP BEFORE SERVICING.

NOTE

Do not touch bulb with bare hands. The oils in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.

Ultraviolet Radiation Safety

WARNING: Do not attempt operation until you are familiar with all warnings, precautions, and procedures outlined within this instruction sheet.

OPERATION PRECAUTIONS

- **UV LIGHT WARNING:** UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation.
- **UV LIGHT CAUTION:** UV light may degrade plastic and rubber components after longterm exposure.
- Currently, there are no work place related rules and regulations that are set by OSHA (Occupational Safety and Health Association) in regard to UVC environmental health and safety.
- **NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE**

OPERATION SAFETY

- People and animals are forbidden from being exposed to the light output of this cart for extended periods of time. Long term exposure will case damage to the eyes and skin.
- This product produces UV radiation. Anything in front of the unit will be exposed to UV radiation. Operators positioning the cart while not illuminated will not be exposed. Radiation is only emitted while the cart is turned on. Radiation will not linger in the environment when the lamps have been powered off. Safety equipment is only required when the device is in-use.
- Wear eye protective gear when operating the equipment. Polycarbonate safety glasses at minimum are required during all operations. Full frontal polycarbonate or UV-preventative face masks are recommended.
- Wear long sleeves and gloves when operating the equipment. Personal protective gear is required for long term exposure.

OPERATION SAFETY STRATEGIES

- Instruct service personnel to never look directly at UV-C light without adequate eye protection.
- Make it a policy to never enter areas being disinfected with UV lighting systems without powering the system down first. Methods of powering down depends on the options of the device purchased and may include unplugging the light source, operating the power switch to power the lamps off, or turning the system off via a wireless remote control or wireless application.
- Place warning labels near all openings/entrances to areas being disinfected with UV lighting systems. When possible, lock access doors to prevent unexpected guests from entering the area.
- Close blinds/curtains of areas being disinfected with UV lighting systems if available. If not available, block off direct access to windows/doorways to prevent access to the area. If you cannot fully block off all access (hallways with visible windows, etc) place exterior warnings in areas prior to the exposed windows (hall pedestals, banners, posters) explaining what areas are being disinfected and to not look into the room.
- Educate non service personnel about the intended operations for UV disinfecting and what signage will be posted. Instruct non service personnel to never look directly at UV-C light.
- Instruct service personnel to always wear personal protective gear (as outlined above) when they must operate in an area that has UV-C exposure, for short or long term work.

These safety precautions will help ensure service personnel are protected from accidental exposure while maintaining the effectiveness of UV-C to eradicate biological contaminants.

In the event of UV exposure, the following actions are recommended.

- See an ophthalmologist if eye damage is suspected.
- Treat skin lesions immediately.
- For severe skin lesions, seek local medical treatment and follow their recommendations for treatment.
- Follow your organization’s incident reporting procedure. These often require documentation of the date and time of the incident, persons involved, equipment involved and type of injury.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.