

IND-EMG-EXT-LE6-2L-RH

Weatherproof Bug Eye Emergency Exit LED Fixture - Self-Testing- 90 Min. Emergency Runtime

Product ID: 151219



Image: IND-EMG-EXT-LE6-2L-RH

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

IND-EMG-EXT-LE6-2L-RH Weatherproof Emergency LED Exit Sign

Lamp Type: LED
Dimensions: 20"L x 18"H x 6"D
Weight: 5 lbs
Voltage: 120/277V AC, 60Hz
Watts: 2.2W
Lumens: 66
Luminous Efficacy: 30 Lm/W
LED Light Color: White
LED Life Expectancy: 100,000 Hours
Emergency Runtime: 90 Minutes
Battery: Maintenance-Free 3.6 Volt NiCad Rechargeable Battery
Battery Recharge Time: 24 Hours
Battery Life Expectancy: 15 Years
Wiring: Operator Provided Wiring & Seal Off
Mounting: Surface Mount
Adjustability: Lamp Heads Horizontally & Vertically Adjustable
Housing Material: Die Cast Aluminum
Housing Color: Powder Coated - Grey
Lens Material: Polycarbonate

Ratings/Approvals

Weatherproof
90 Minute Emergency Runtime
24 Hour Battery Recharge Time
Self-Testing Unit
Horizontal and Vertical Adjustable
24 Hour Battery Recharge Time
Remote Light Head Ready

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671
Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The IND-EMG-EXT-LE6-2L-RH from Larson Electronics is a Weatherproof Bug Eye Emergency Exit LED Fixture, which offers emergency and self-testing features. The

IND-EMG-EXT-LE6-2L-RH produces 66 total fixture lumens while drawing only 2.2 total watts and will operate for at least 90 minutes in the event of a power failure or outage. This unit has a 24 hour battery recharge time following emergency operation and operates on 120/277V AC @ 60Hz. The IND-EMG-EXT-LE6-2L-RH is an ideal solution for providing emergency lighting and exit marking. A battery enclosure is available for completing remote light head connections and system components.

The IND-EMG-EXT-LE6-2L-RH is ideal for installation in areas that require emergency illumination and exit marking in the event of a power failure or power outage. This fixture features weatherproof enclosures that are configured in a bug eye layout. The upper enclosure on the left houses an LED light and the upper enclosure on the right features a single sided exit sign while the bottom enclosure contains an indicator light. The unions between the upper enclosures and the lower enclosure allow for both horizontal and vertical adjustment. For remote light head operation, operators must mount the battery enclosure in a separate location and complete the necessary connections and components.

Light Features: The IND-EMG-EXT-LE6-2L-RH features two lamps that each contain eight LEDs that draw a total of 1.1 watts per lamp. Each lamp produces 33 lumens of high-intensity white LED light for a fixture total of 66 lumens produced while drawing a total of 2.2 watts. This weatherproof emergency exit LED fixture features brown-out, short circuit and voltage surge protection and has a low voltage disconnect which prevents damage to the battery caused by a deep discharge. This self-testing LED fixture will run for at least 90 minutes after a power failure thanks to the maintenance-free 3.6 volt NiCad battery. After emergency use, the battery takes 24 hours to completely recharge.

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

Emergency Operation: The IND-EMG-EXT-LE6-2L-RH features a backup battery that will run the fixture for at least 90 minutes following a power outage or any other loss of power. The included emergency backup battery is a 3.6 volt NiCad rechargeable unit. These batteries are maintenance-free and have a life expectancy of 15 years while being able to operate in a wide variety of conditions including in temperatures ranging from 0°C to +40°C. This unit also features a low voltage disconnect. This means that if the fixture detects that the battery's terminal voltage has fallen below a certain level, the low voltage circuit will disconnect the

emergency lighting load until normal power is restored. This prevents the battery from experiencing a deep discharge and becoming damaged.


Wiring: The IND-EMG-EXT-LE6-2L-RH emergency self-testing exit sign LED fixture is **NOT** a factory sealed fixture. Operators will bring their own wiring to a junction box and complete their connections. The IND-EMG-EXT-LE6-2L-RH operates on 120/277V AC @ 60Hz.

Mounting: The IND-EMG-EXT-LE6-2L-RH is designed to be surface mounted to flat surfaces such as walls. The unions connecting the upper lamps to the lower indicator light enclosure allow for both horizontal and vertical adjustment. This gives operators the ability to adjust the light to their specific mounting location for ideal light coverage during a power failure or power outage.

Suggested Applications: The IND-EMG-EXT-LE6-2L-RH is ideal for use as emergency lighting and exit marking in rugged work sites and general locations.


At Larson Electronics, we do more than meet your lighting needs. We also provide replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

8	7	6	5	4	3	2	1
REV	DESCRIPTION						DATE
A	PRODUCTION RELEASE						3/20/2020
IND-EMG-EXT-LE6-2L-RH							
							
8	7	6	5	4	3	2	1

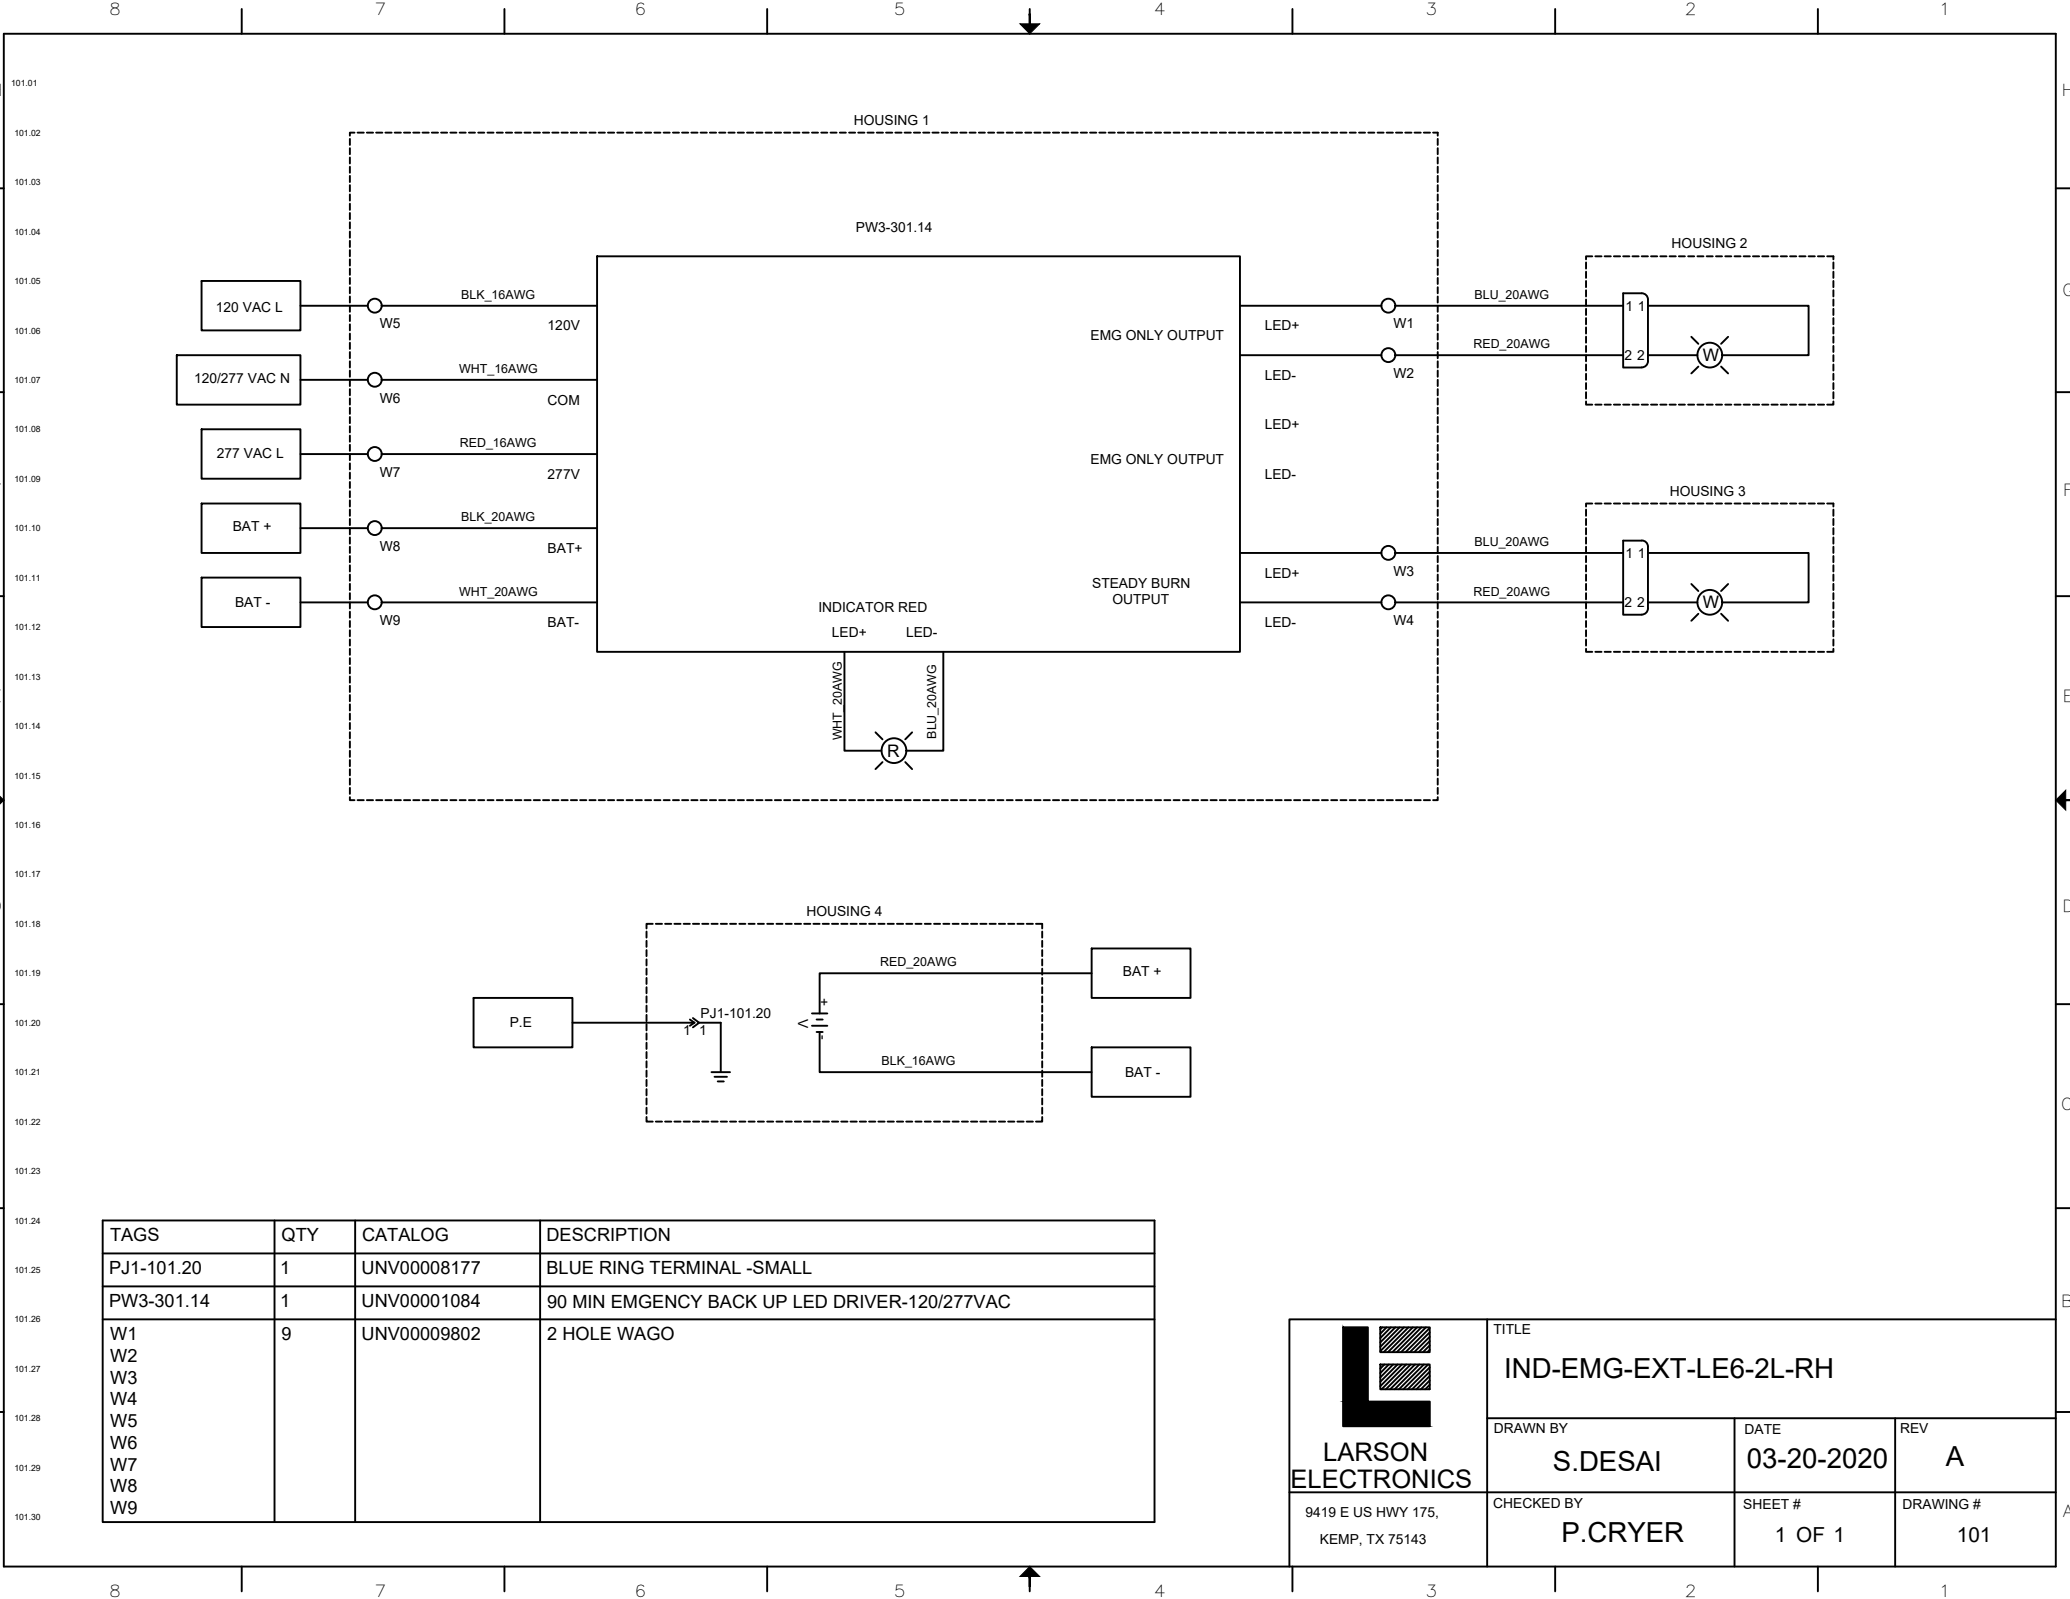


TAGS	QTY	CATALOG	DESCRIPTION
PJ1-101.20	1	UNV00008177	BLUE RING TERMINAL -SMALL
PW3-301.14	1	UNV00001084	90 MIN EMERGENCY BACK UP LED DRIVER-120/277VAC
W1 W2 W3 W4 W5 W6 W7 W8 W9	9	UNV00009802	2 HOLE WAGO


 LARSON ELECTRONICS 9419 E US HWY 175, KEMP, TX 75143	TITLE IND-EMG-EXT-LE6-2L-RH		
	DRAWN BY S.DESAI	DATE 03-20-2020	REV A
	CHECKED BY P.CRyer	SHEET # 1 OF 1	DRAWING # 101

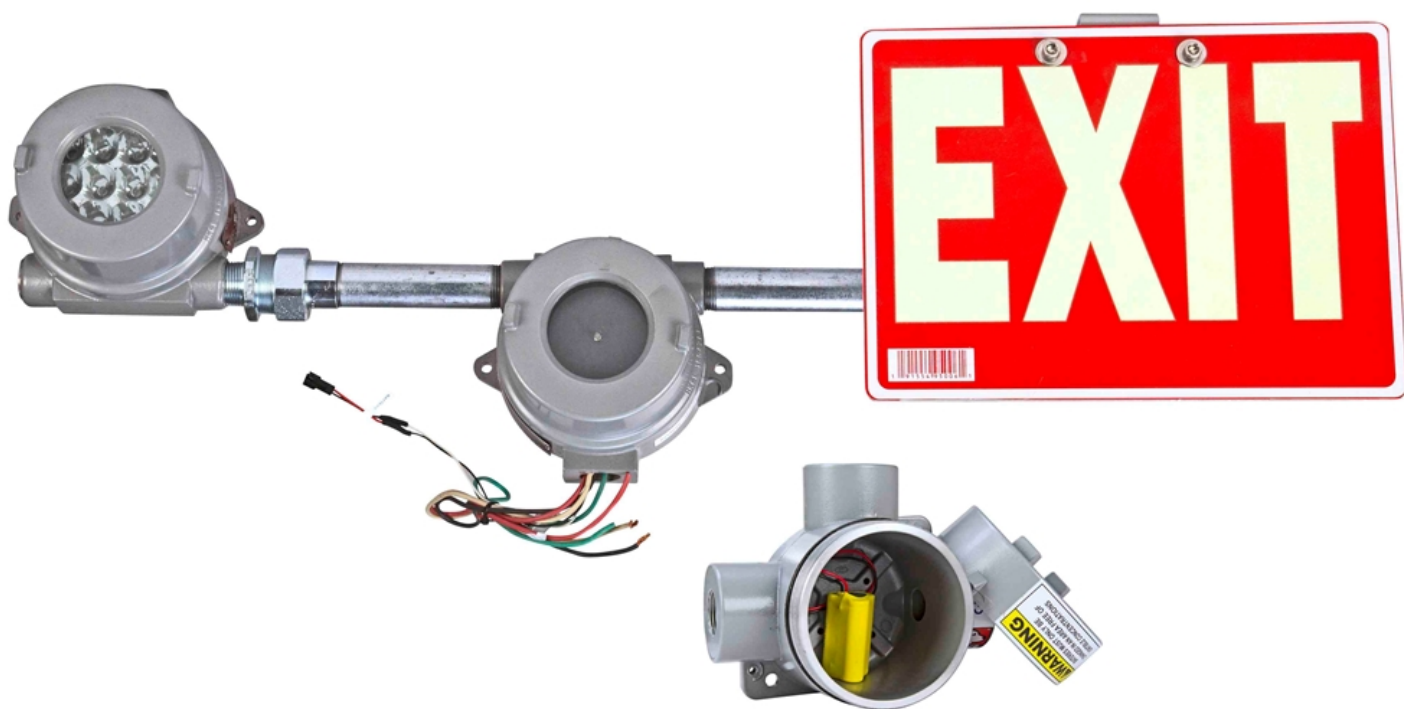




LARSON
ELECTRONICS[®]

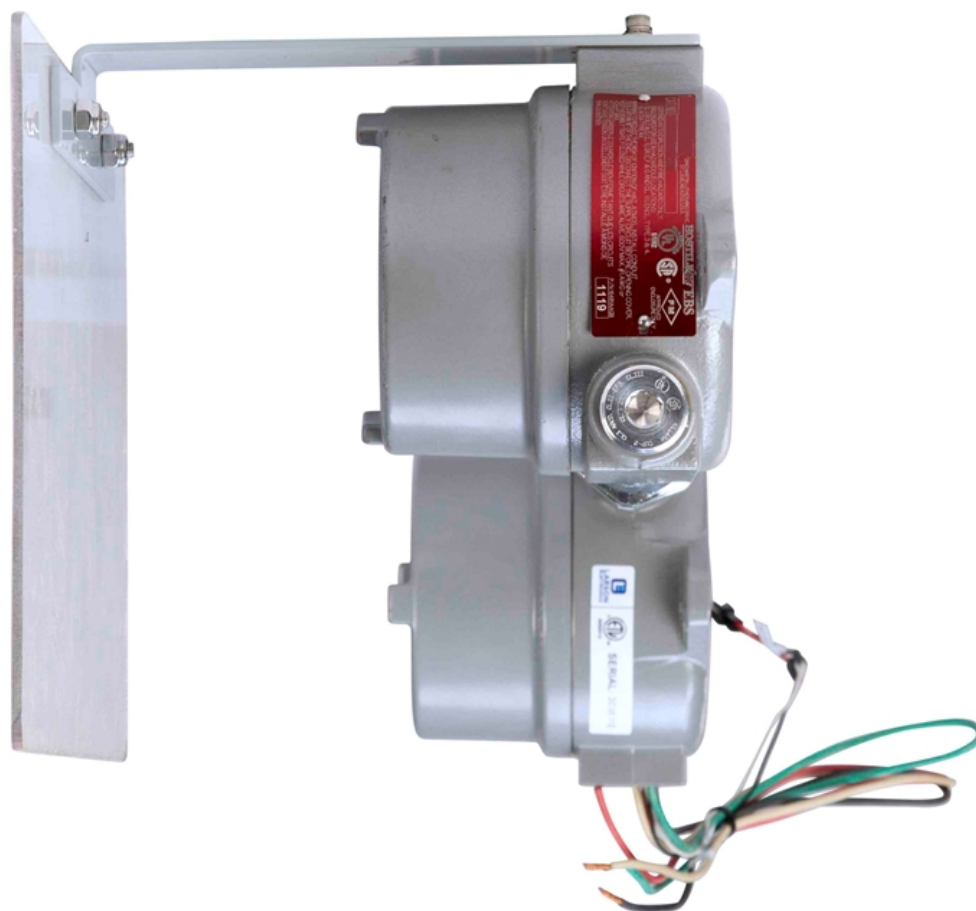

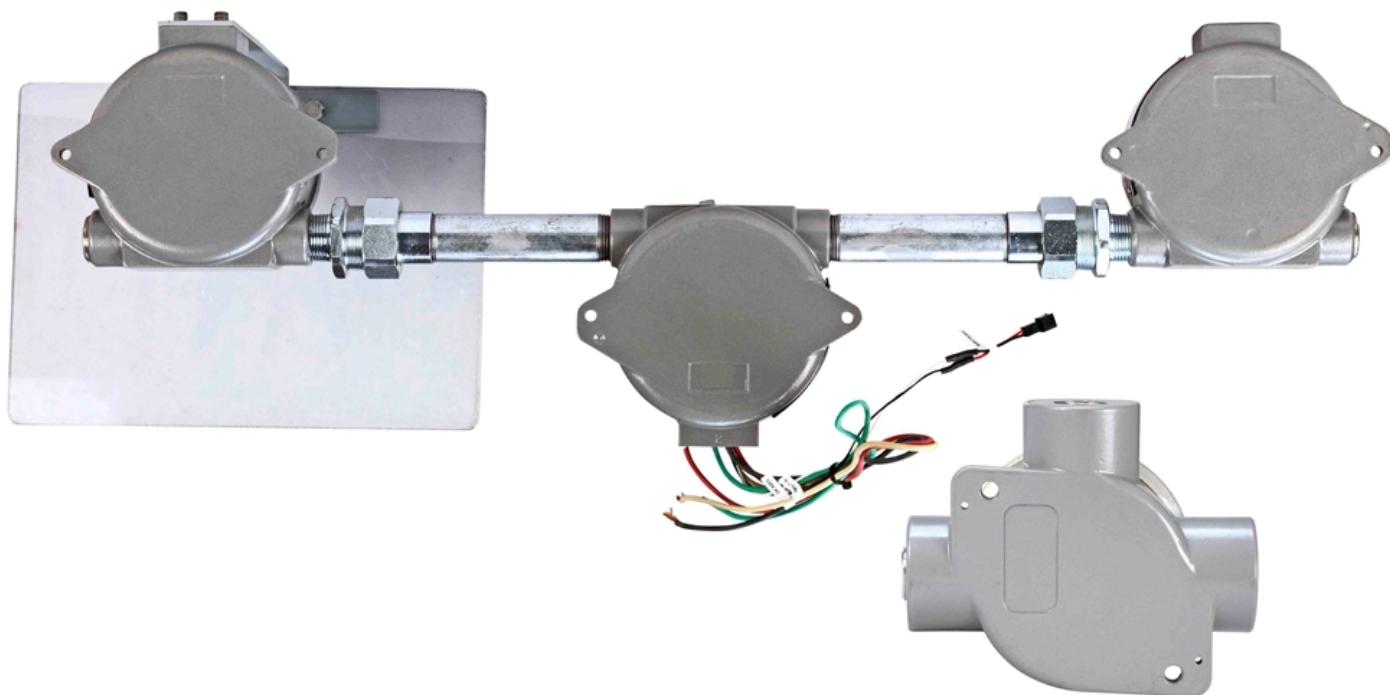

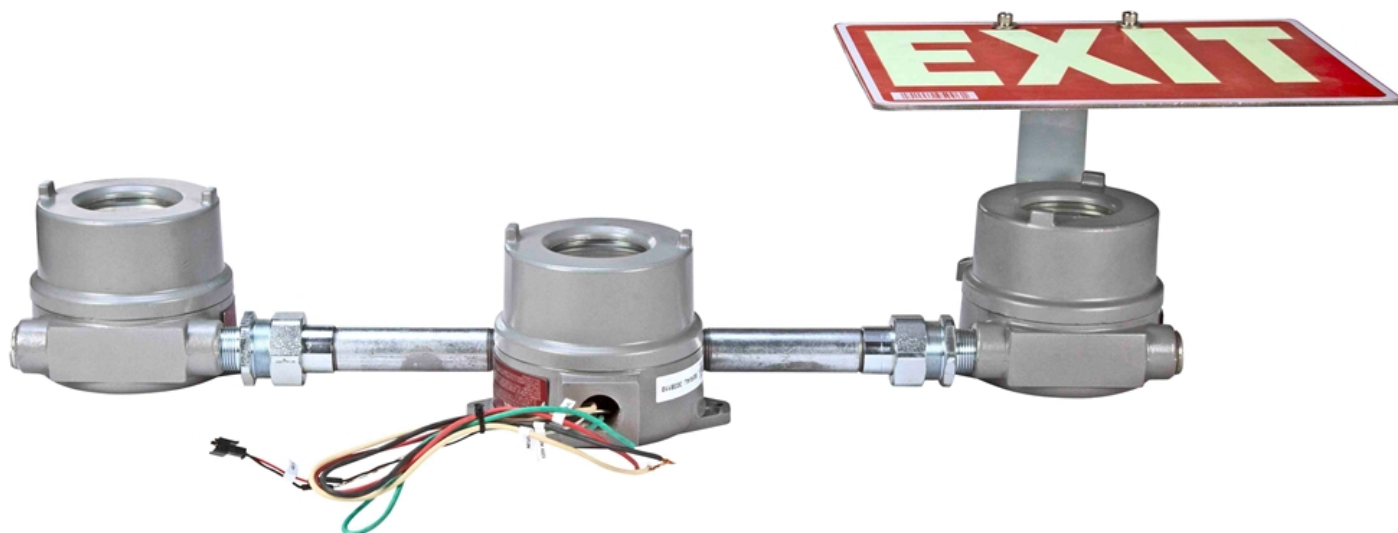



Frequently Asked Questions (FAQ)

There are no Faqs