Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

MT-BBT-249-239D-208.225D-3P-25.04A

3-Phase Buck/Boost Step-Down Transformer - 249-239V Delta Primary - 208-225V Delta Secondary - 25.04 Amps - 50/60Hz

Product ID: 315023



Image: MT-BBT-249-239D-208.225D-3P-25.04A

Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

MT-BBT-249.239D-208.225D-3P-25.04A Buck and Boost Step-Down Transformer

Transformer Type: Buck/Boost Step-Down Autotransformer
Phase: 3-Phase
Frequency: 50/60 Hz
Input Voltage: 249-239V Delta 3PH
Primary Amps: 22.61 @ 249V Delta
Primary Configuration: Delta
kVA: 9.75
Output Voltage: 208-225V Delta 3PH
Secondary Amps: 25.04A @ 225V Delta
Voltage Difference: 94%
Primary Configuration: Delta
Winding Material: Aluminum
Knockouts: Side and rear
Primary Termination: Front access copper tabs or lead wires
Secondary Termination: Front access copper tabs or lead wires
Cooling: Air / Dry Type
Insulation: 130°C
Temperature Rise: 80°C
Sound Level: 36 dB
Enclosure Rating: NEMA 3R
Encapsulation: Silica sand, resin compounds
Enclosure Material: Steel
Finish: ANSI 61 Grey / UL50
Mounting: Wall mount via mounting tabs
Dimensions: 10.5"H x 11.76"W x 5.19"D

Ratings

UL listed for United States
CSA certified for Canada
NEMA 3R Indoor/Outdoor Enclosure
Meets or Exceeds NEMA ST-20 Standards
Buck and Boost Step-Down Transformer

Special Orders - Special Requirements

Contact us for special requirements
Toll Free: 1-800-369-6671

Weight: 50 lbs
Wiring: Diagram 5

Intl: 1-903-270-1187
E-mail: sales@larsonelectronics.com

The MT-BBT-249-239D-208.225D-3P-25.04A three phase step-down Buck and Boost Transformer from Larson Electronics is powerful, reliable,and designed with the environment in mind. Suitable for both indoor and outdoor applications, the MT-BBT-249-239D-208.225D-3P-25.04A provides increased reliability, higher efficiency, protection against critical equipment failures and an extra level of protection by isolating the power source from the connected device. The lower operating costs, lower heat emissions and lower cost of ownership make this transformer ideal for a wide range of applications and businesses.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO POWER DISTRIBUTION PANELS, TRANSFORMERS, OR SUBSTATIONS

Transformer Features: The MT-BBT-249-239D-208.225D-3P-25.04A buck and boost transformer is a three phase unit with a 9.75 kVA rating and a primary voltage of 249-239V Delta using a maximum of 22.61 amps on the primary side. This step-down transformer has a secondary voltage of 208-225V Delta and provides up to 25.04 amps available on the secondary side. This is a 3-phase delta configuration without a neutral. Featuring robust construction, this unit`s cores are manufactured with non-aging, cold-rolled silicon steel laminations using state of the art technology.

This unit boasts a low cost of ownership and is highly energy efficient. Lower heat emissions mean less cooling is needed as well. The NEMA 3R painted steel enclosure makes the unit suitable for both indoor and outdoor applications, and this step-down transformer can be either floor or wall mounted. The MT-BBT-249-239D-208.225D-3P-25.04A features a 130°C insulation with a 80°C temperature rise.

Construction: The aluminum winding in the MT-BBT-249-239D-208.225D-3P-25.04A are formed from high quality aluminum wire help to improve performance. The close tolerances used during manufacturing also eliminates burrs which hinder performance. Each core is specially coated to prevent the ingress of moisture and are electrically balanced to minimize axial forces during short circuit situations. Buck and boost transformers are designed to maximize the performance and life of electrical equipment. The MT-BBT-249-239D-208.225D-3P-25.04A is encapsulated in silica sand and resin, and cased in a NEMA 3R steel enclosure. NEMA 4, NEMA 4X, and NEMA 12 enclosures are available upon request.



Click Image to Enlarge

Benefits: The MT-BBT-249-239D-208.225D-3P-25.04A buck/boost step-down transformer offers many benefits to the consumer. Buck/boost transformers pass the majority of the load

voltage directly through the transformer, only transforming a small percentage of the load. Due to this technology, a smaller and quieter step-down transformer is manufactured and uses less materials. This provides owners with significant energy savings as well as offering environmental benefits.

Higher efficiency not only extends the life of the transformer, but also turn into cost savings for owners in the form of lower energy bills and decreased cost of ownership. Installation and maintenance costs are reduced due to the smaller form factor, and less overall space requirements are decreased. In addition, these step-down transformers operate quieter than a standard autotransformer of the same capacity.

Mounting: Integrated wall mounting brackets make installation fast and easy. Because of the smaller overall footprint, heavy machinery is rarely needed for mounting and installation.

Installation: Installation is simple. Connect the primary leads and secondary leads to the step-down transformer per the provided wiring diagram. Knockout hubs on either side and the bottom of the transformer allow for easy line-in and line-out wiring. The front access cover provides convenient .

Applications: Air conditioners, lighting systems, heating elements, motor applications and other applications that that require the ability to power loads that differ from the available line voltage.

Limitations: While there are many benefits to a buck/boost transformer, there are some limitations to consider. This transformer will only transformer voltage, it will not convert phases, it will not create even legs between line 1 and line 2 (L1 and L2 WILL be UNEVEN), has no circuit isolation, and does not create a neutral for applications where a neutral is not already present. If any of these limitations apply to you, you will need a standard transformer. Please see below link for our standard line of industrial transformers or our line of phase converters.

Note on Phases: This buck/boost transformer is a single phase step-down transformers. For three phase transformers, click on the following links:
Single Phase Buck/Boost Transformers
Three Phase Wye Buck/Boost Transformers

Larson Electronics is a manufacturer and as such can build stationary and portable transformer systems to your specifications. Although we carry several models of power distribution transformer systems, we can deliver custom ordered units almost as quickly as our prebuilt units. If this model does not meet your needs, please contact us at 1-800-369-6671 or sales@larsonelectronics.com to discuss your specific requirements.

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664






Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664




Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

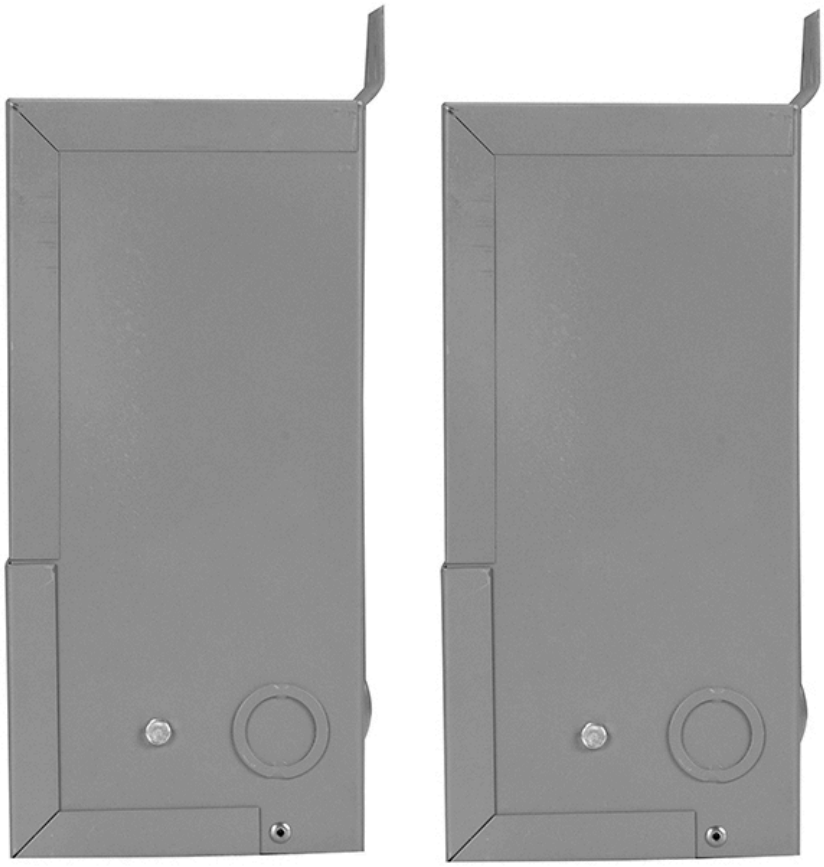

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

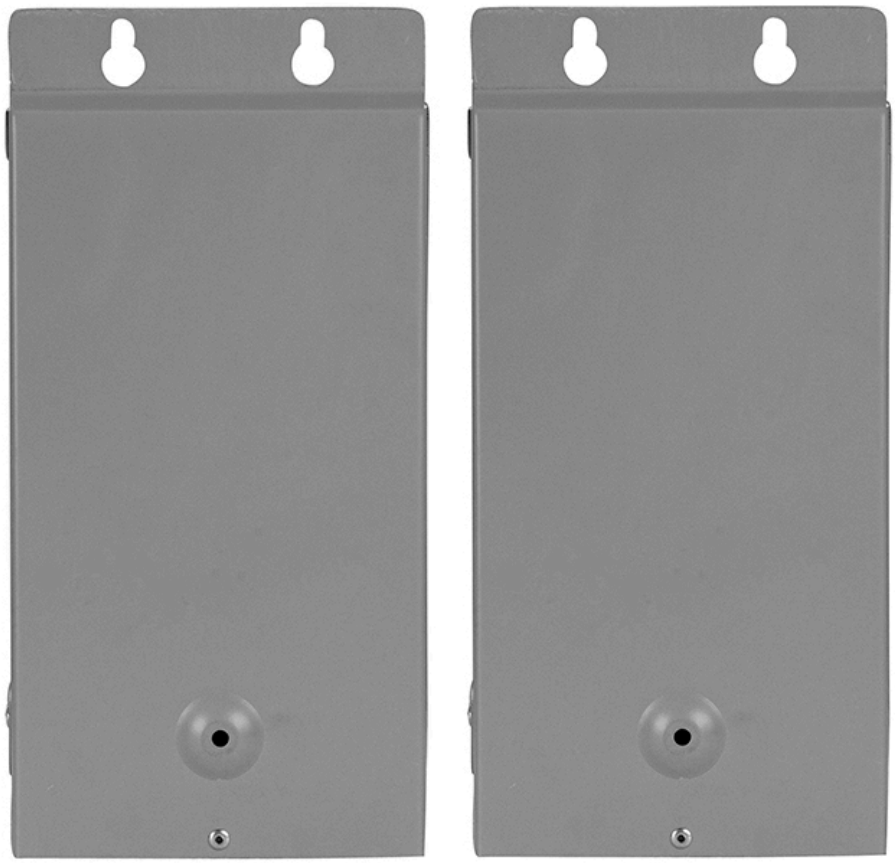

Larson Electronics LLC
9419 E US HWY 175, Kemp, TX 75143
Phone: 800.369.6671

www.LarsonElectronics.com
Email: sales@LarsonElectronics.com
Fax: 903.765.7664

Frequently Asked Questions (FAQ)

There are no Faqs