Stanchion Post/Pole Mount w/ Red & Green Running Lights and Perko Door Socket for Golight Strykers

Stanchion post mount for boat lights that has a 2 pin gold coated connector in the base. The base slides and locks into a sliding door Perko socket via a twist collar. The Perko socket can be attached to any surface including fiberglass and will securely hold the light in place. The red and green running lights are generally wired serially, so that they go on when power is sent to the unit (via dash mount toggle, for example).

MOUNTING INFORMATION

Read all instructions before proceeding.

1. Mount Golight to the top of the post mount following instructions supplied with your device. Red and Green running lights on stanchion post mount are generally supplied complete with a 12V bulb.

2. The running light is designed to be mounted on a horizontal surface. (IMPORTANT: top of light must be vertical during operation.)

3. Setup for Operation:
   Insert pole in base, making sure alignment screw in pole slides into notch in base. Push pole down until it engages the electrical connector and then lock by rotating the locking collar clockwise.

   As pole engages with base, make sure alignment screw in pole slides into the notch in base. Push the pole until it engages the electrical connector. Turn the threaded collar clockwise until it threads into place and is snug onto the base.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.

Black 2-Pin Perko Socket Mounting Base
Mounting information

Do not attempt operation until you are familiar with all warnings, precautions, and procedures outlined within this instruction sheet. Read carefully before operating. Retain these instructions for future reference.

USER SHOULD BE TRAINED IN THE PROPER USE AND MAINTENANCE OF THIS DEVICE.
WE RECOMMEND A LICENSED ELECTRICIAN INSTALL THIS PRODUCT.

INSTALLATION

1. For proper light selection, positioning and configuration, refer to A.B.Y.C. Standard A-16*, the '72 COLREGS*, and the U.S. Inland Rules*.
2. These bases are designed to be mounted on a horizontal surface.
3. For Bi-Color lights, draw a 6" long reference line through the center of the selected mounting location and parallel to the centerline of the boat.
4. Cut out the mounting template. Place it on the mounting surface such that the reference line (drawn above) is directly underneath the reference line marked on the template.
5. Drill indicated holes through the template to accommodate #8 oval head mounting screws and socket as required.
6. Attach supply connections to the light, making sure to wire in accordance with both A.B.Y.C. Standard E-9* and the U.S. Coast Guard Safety Standards for Boat Electrical Systems (33 CFR 183)*.

For 2-contact bases, the supply leads are coded as follows:


WHITE: Positive supply lead
BLACK: Negative supply lead (Caution: Negative lead connected to case. To avoid energizing case, observe polarity.)
Electrical connections must be made such that the forward compartment is switched in conjunction with the other running light(s); aft compartment should be switched with Ignition (or permanently energized), as a push switch is provided on top of the light. **NOTE:** All light circuits must be circuit protected. Use a 1/2 Amp fuse (or breaker) for the courtesy light circuit and a 2 Amp fuse (or breaker) for the combination light circuit.

7. Setup for Operation: As pole engages with base, make sure alignment screw in pole slides into the notch in the base. Push pole until it engages the electrical connector and lock by rotating the locking collar clockwise.

* The above referenced standards can be obtained from
American Boat & Yacht Council, Inc.
613 Third Street, Suite 10
Annapolis, MD 21403

U.S. Coast Guard
Washington D.C. 20593
(or your local C.G. Office)

MOUNTING TEMPLATE

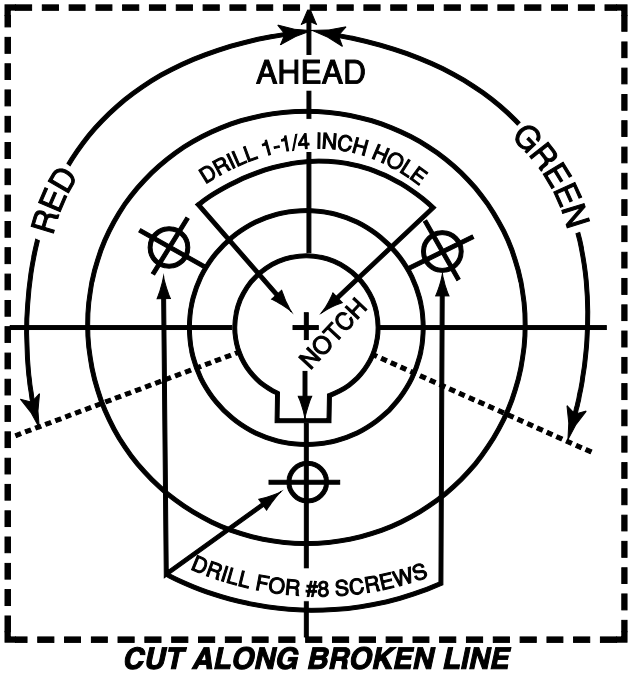

CUT ALONG BROKEN LINE



<< PRINT ACTUAL SIZE (100% SCALE) FOR CORRECT DIMENSIONS.