Telescoping Light Tower w/ Dual Remote Control Spotlights
Instruction Manual


Do not attempt operation until you are familiar with all warnings, precautions, and procedures outlined within this instruction sheet. Read carefully before operating. Retain these instructions for future reference.

WARNING:

- KEEP LIGHTED LAMP AWAY FROM COMBUSTIBLES.
- DO NOT TOUCH HOT LENS GUARD OR ENCLOSURE.
- DO NOT REMAIN IN LIGHT IF SKIN FEELS WARM.
- DO NOT LOOK DIRECTLY AT LIGHTED LAMP.
- KEEP LAMP AWAY FROM MATERIALS THAT MAY BURN.

USING THE TRIPOD

1. To assemble the tripod, begin by loosening the black adjustment knob on the tripod base. Slide the center pole through the adjustment sleeve until the legs are fully deployed. Tighten adjustment knob so legs stay fixed in place. Now you are ready to install top portion.
2. Position light head over top pole on tripod and tighten black adjustment knob until snug.
3. Loosen black adjustment knob for each sleeve to extend tripod. Extend top pole, then bottom pole when elevating.
4. Tighten adjustment knob once desired height is achieved.
5. Attach power cord from Transformer to **Voltage:** 120-277V AC.

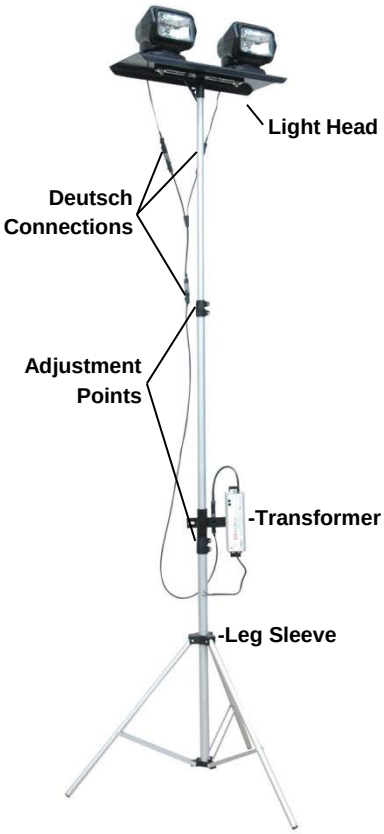

Note: *Each spotlight operates on 12V DC without Transformer.*

OPERATION

The light head features two, 2-Speed Searchlights with Directional Flexibility which gives the operator a full 370° horizontal rotation and a 135° vertical tilt with the handheld remote control.

1. Using the remote control, turn on both lights by pressing the on/ off button.


   Note: *The spotlights should not be turned on when the snap on lens cover (rockguard) is attached.*

2. With the arrows on the remote, rotate your lights to the desired position.
3. The speed of the light rotation can be controlled by pressing the fast/slow button one time and by pressing it again to restore the original speed.

   Note: *This light may be damaged if operated in icing conditions.*

USE AND CARE

Unauthorized modification may impair the function and/or safety of the work light and could affect the life of the equipment. Always check damaged or worn out parts before using the work light. When work light is not in use, store it in a secure place out of the reach of children. Inspect for good working condition prior to storage and before re-use.

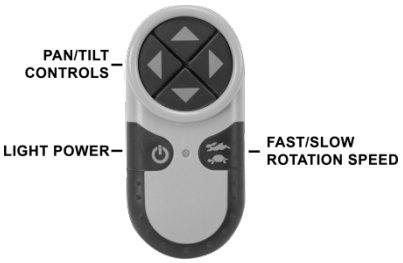

Should further information not covered by these instructions be required, please contact Larson Electronics at 1-800-369-6671 or sales@larsonelectronics.com for further assistance.

Please visit LarsonElectronics.com for **Warranty** and **Return** information.