Stainless Steel Latch for HALP Series Light Fixtures
Instruction Guide

Stainless steel latch for HALP series hazardous location light fixtures.


Clips are sold individually. HALP-48 series fixtures require eight clips total (four clips per side). HALP-24 series fixtures require four clips total (two per side).

INSTALLATION

1. **Remove old clip from fixture:**

   a. Unlatch clip.

   b. Slide clip down toward fixture base to remove from its mount.

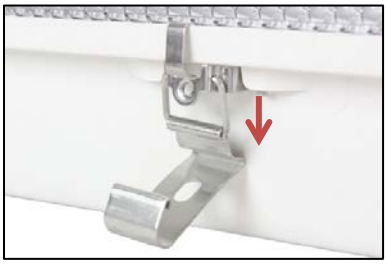

2. **Install new clip:**

   a. Insert clip to clip mount and slide up toward fixture top to install.

   b. Latch clip to lens.



Repeat this process for any remaining lens clips. It may be necessary to remove the lens if replacing multiple clips at a time. Ensure clip is fully seated into its mount before latching to lens.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.