THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R7-3P-GMR-150KVA-YE-LT-DF-A6-BB-CZ-2B4-M1

High Voltage		
Tap Position	Voltage (V)	Current (A)
1	13101	6.6
2	12782	6.8
3	12470	6.9
4	12158	7.1
5	11854	7.3
Low Voltage		
Voltage (V)		Current (A)
480		180.4


Rated Capacity	150	KVA
HV	12470GrdY/7200	V
LV	480Y/277	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	YnYn0	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code	284134		
Serial Number	XXXXX		
HV BIL	95	LV BIL	30
Winding Con.	HV: CU	LV: CU	
Temp. Rise	65		°C
Oil Capacity	108		GAL
Total Weight	2,870		LBS
Body Weight	1,100		LBS
Step-Up Operation:	No		

Tank must be solidly grounded - NON-PCB Oil

Biodegradable Natural Vegetable Oil

Wire Connection

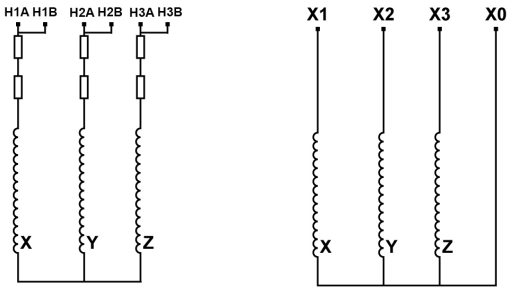

Phasor Diagram



ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022

LARSON MAGNETICS

Larson Magnetics LLC
Kemp, TX USA