THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R7-3P-GNF-225KVA-YE-LT-DF-A6-BB-CZ-2B4-M1


High Voltage		
Tap Position	Voltage (V)	Current (A)
1	4371	29.7
2	4264	30.5
3	4160	31.2
4	4056	32.0
5	3955	32.8
Low Voltage		
Voltage (V)		Current (A)
208		624.6

Rated Capacity	225	KVA
HV	4160GrdY/2400	V
LV	208Y/120	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	YnYn0	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code	284666		
Serial Number	XXXXX		
HV BIL	60	LV BIL	30
Winding Con.	HV: CU	LV: CU	
Temp. Rise	65		°C
Oil Capacity	126		GAL
Total Weight	3,420		LBS
Body Weight	1,463		LBS
Step-Up Operation:	No		

Tank must be solidly grounded - NON-PCB Oil **Biodegradable Natural Vegtable Oil**

Wire Connection

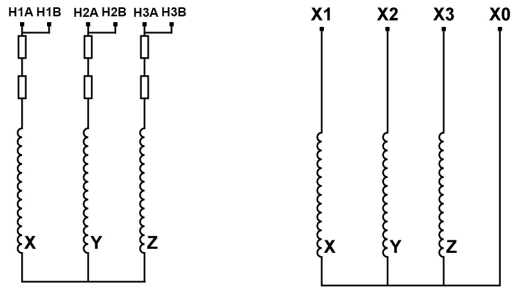

Phasor Diagram



ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022

LARSON MAGNETICS

Larson Magnetics LLC
Kemp, TX USA