THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R7-3P-GMP-225KVA-YC-LT-DF-A6-BB-CZ-2B4-M1

High Voltage		
Tap Position	Voltage (V)	Current (A)
1	14499	9.0
2	14145	9.2
3	13800	9.4
4	13455	9.7
5	13119	9.9
Low Voltage		
Voltage (V)		Current (A)
600		216.5


Rated Capacity	225	KVA
HV	13800GrdY/7968	V
LV	600Y/347	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	YnYn0	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code	284808		
Serial Number	XXXXX		
HV BIL	95	LV BIL	XX
Winding Con.	HV: CU	LV: CU	
Temp. Rise	65		°C
Oil Capacity	XXX		GAL
Total Weight	XXX		LBS
Body Weight	XXX		LBS
Step-Up Operation:	No		

Tank must be solidly grounded - NON-PCB Oil

Biodegradable Natural Vegtable Oil

Wire Connection

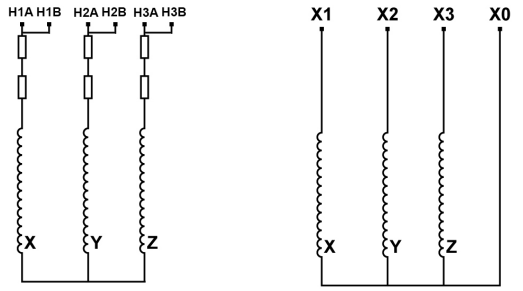

Phasor Diagram



ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022

LARSON MAGNETICS

Larson Magnetics LLC
Kemp, TX USA