THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R7-3P-GMQ-225KVA-YE-LT-DF-A6-BB-CZ-2B4-M1


High Voltage		
Tap Position	Voltage (V)	Current (A)
1	13868	9.4
2	13530	9.6
3	13200	9.8
4	12870	10.1
5	12548	10.4
Low Voltage		
Voltage (V)		Current (A)
480		270.6

Rated Capacity	225	KVA
HV	13200GrdY/7620	V
LV	480Y/277	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	YnYn0	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code	285422		
Serial Number	XXXXX		
HV BIL	95	LV BIL	30
Winding Con.	HV: CU	LV: CU	
Temp. Rise	65		°C
Oil Capacity	126		GAL
Total Weight	3,420		LBS
Body Weight	1,463		LBS
Step-Up Operation:	No		

Tank must be solidly grounded - NON-PCB Oil **Biodegradable Natural Vegtable Oil**

Wire Connection

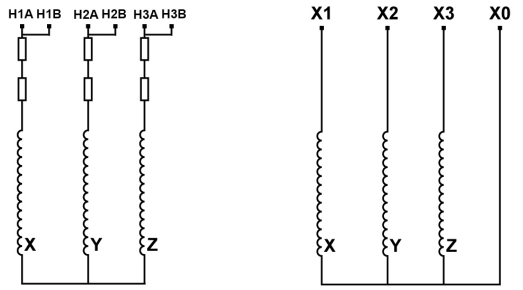

Phasor Diagram



ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022

LARSON MAGNETICS

Larson Magnetics LLC
Kemp, TX USA