
25W Rechargeable LED Hunting Spotlight - Pistol Style - 2000 Lumens
Charges During Plugged In Use
Instruction Manual

Familiarize yourself with all procedures outlined within this instruction sheet.

POWER

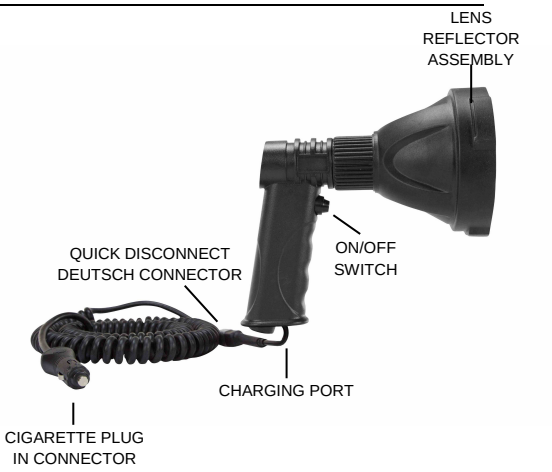

1. This rechargeable LED hunting spotlight can be charged at any location using a vehicle or wall charger. The wall charger connects to the light at the base. The rechargeable spotlight can be used while plugged in or unplugged for continuous use. The light can be powered on by pressing the on/off button located on the front of the handle.
2. The wall charger will have a solid red indicator light when the battery is charging.
3. Charge time will vary based on remaining battery charge and battery condition. Maximum charge time is 3 hours.
4. The spotlight can be turned on while the 12V cigarette charger is plugged in and will continue to charge while the light is being operated.
5. This LED spotlight has a lithium-ion battery. The battery can be charged as little or as much as desired without “memory” issues. Lithium ion batteries do not need to be fully drained before charging nor fully charged before continuing usage.
6. The LED indicator will turn green when the battery is fully charged.
7. Lithium ion batteries generally will discharge very slowly while not being used. You can expect a fully charged lithium ion battery to last 9-12 months on the shelf if the light was fully charged when stored.

The spotlight can be charged while it is plugged into a 12V power source, such as a vehicle`s power socket, and while it is in use. The cord can be disconnected at any time to turn this unit into a rechargeable unit. You can disconnect the coil cord by releasing the deutsch quick connect. When you’re ready to charge the spotlight, reconnect the coil cord and plug into your vehicles 12V cigarette plug.

Operating on 12-24V DC or 120V or 240V, this IP67 rated waterproof spotlight is ideal for hunting, camping, marine and boating use as well as for first responders and emergency services.

The cigarette plug must only use 12-24V DC for recharging the spotlight. A 120V or 240V wall charger comes standard and is plugged into the charging port at the base of the spotlight indicated in figure above.

This variable voltage allows the light to be connected to household outlets or consumer vehicles and other non-standard power supplies such as military vehicles and heavy equipment.

PLEASE NOTE: *There is no difference in light output between voltages.*

DETACHABLE CORDS


DEUTSCH CONNECTOR

- The 12V coil cord is attached via a weatherproof 2-pin Deutsch connector.
- The cord is detachable by depressing the tab on the top of the connectors. This enables the operator to leave the cord connected to the power source and remove to store the light.
- Additional or replacement cords can be ordered from our website.

*We offer 16 foot coil cords with a cigarette plug (C-16-CC-CP), 21 foot cords with ring terminals (C-21- RT), 16 foot cords with battery clamps (C-16-BC), and 16 foot straight cords with cigarette plugs (C-16 CP).

MOUNTING

1. These units are handheld via the pistol grip handle

MAINTENANCE AND BATTERY

- Charge this spotlight using only the provided charger and cord.
- Charge this spotlight every 2 months during periods of non-use.
- Unplug the unit and allow to cool before attempting to clean any part.
- Only use a soft cloth moistened with a mild solution of water and detergent on the outer surface of the spotlight when cleaning.
- Periodically inspect the condition of recharge adapters, connectors and wires. Replace any components that may have become worn or broken.
- This spotlight is designed to provide years of service however, when the internal battery reaches the end of its service life, the battery should be properly disposed of

WARNINGS

- **WARNING:** Never place spotlight face down when light is on or is still hot from recent use. Doing so could burn/ignite surfaces such as sets, carpets, etc. and cause major property damage. Always turn off when not in use.
- **WARNING:** Always unplug charger from light and power source when not in use.
- **WARNING:** To prevent serious damage to eyesight, never look directly into light when light is on. **DO NOT** shine light into the face of someone else.
- **WARNING:** DO NOT allow children to handle or operate this spotlight.
- **WARNING:** DO NOT use this product for anything other than its intended use.
- **WARNING:** DO NOT charge or operate in close proximity of combustible or flammable materials.
- **WARNING: DO NOT** charge battery in gas tight enclosure.
- **WARNING: DO NOT** attempt to charge battery pack using both AC and DC chargers at the same time.
- **WARNING: DO NOT** attempt to charge or operate this spotlight if cord, plug, battery, bulb or any other part of the spotlight is damaged or corroded.
- **WARNING:** Use only charging devices that are provided with this rechargeable LED spotlight or its replacement parts.
- **WARNING: DO NOT** disassemble or tamper with the battery pack.
- **WARNING: DO NOT** dispose of battery in a fire as this might result in an explosion.

FEATURES

IP67 Waterproof Dustproof Shockproof
Impact/Vibration Resistant Construction Lightweight
Portable
Continual On/Off Switch
Push Once to Power On, Push Again to Power Off

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.