THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R7-3P-GNF-112.5KVA-YT-LT-DF-A6-BB-CZ-2B4-M1


High Voltage		
Tap Position	Voltage (V)	Current (A)
1	4371	14.9
2	4264	15.2
3	4160	15.6
4	4056	16.0
5	3955	16.4
Low Voltage		
Voltage (V)		Current (A)
208		312.3

Rated Capacity	112.5	KVA
HV	4160GrdY/2400	V
LV	208Y/120	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	YnYn0	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code	285888		
Serial Number	XXXXX		
HV BIL	60	LV BIL	30
Winding Con.	HV: CU	LV: CU	
Temp. Rise	65		°C
Oil Capacity	91		GAL
Total Weight	2,510		LBS
Body Weight	920		LBS
Step-Up Operation:	No		

Tank must be solidly grounded - NON-PCB Oil **Biodegradable Natural Vegtable Oil**

Wire Connection

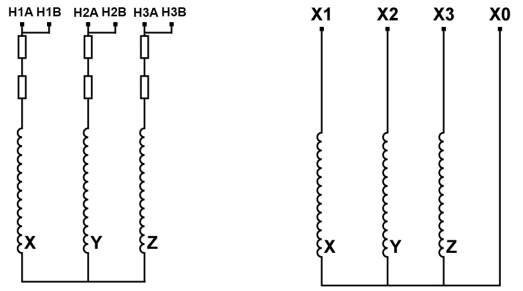

Phasor Diagram



ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022

LARSON MAGNETICS

Larson Magnetics LLC
Kemp, TX USA