

THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R7-3P-DMR-3MVA-YE-LT-DF-A6-BB-AZ-2B4-M1



High Voltage		
Tap Position	Voltage (V)	Current (A)
1	13101	132.2
2	12782	135.5
3	12470	138.9
4	12158	142.5
5	11854	146.1
Low Voltage		
Voltage (V)		Current (A)
480		3608.5

Rated Capacity	3000	KVA
HV	12470	V
LV	480/277 V	
Impedence	XXX	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	DYN1	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code	292135	
Serial Number	XXXXXX	
HV BIL	95	LV BIL 30
Winding Con.	HV: AL	LV: AL
Temp. Rise	65	°C
Oil Capacity	330	GAL
Total Weight	12,576	LBS
Body Weight	XXXX	LBS
Step-Up Operation:	NO	

Tank must be solidly grounded - NON-PCB Oil

Biodegradable Ester Oil

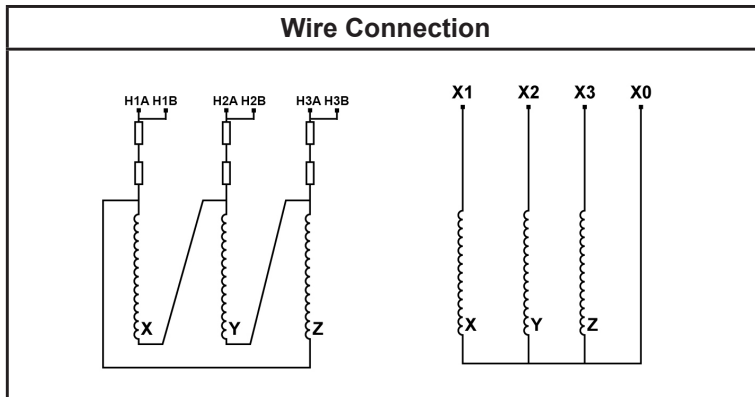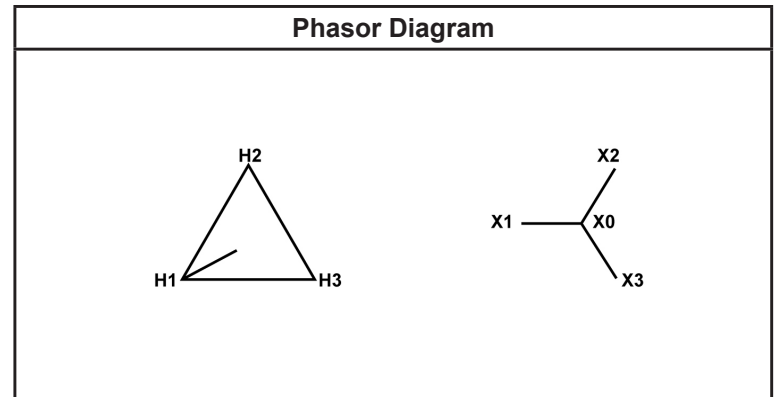

Maximum operating pressures of liquid preservation system _____ kPa (lb/in²) positive and _____ kPa (lb/in²) negative.

Tank designed for ____ kPa (lb/in²) vacuum filling.

Liquid level below top surface of the highest point of the highest manhole flange at 25 °C _____ mm (in). Liquid level changes _____ mm (in) per 10 °C change in liquid temperature.

ANSI C57.12.34 - DOE 2016 Compliant - Manufactured xx/2022



Larson Magnetics LLC
Kemp, TX USA