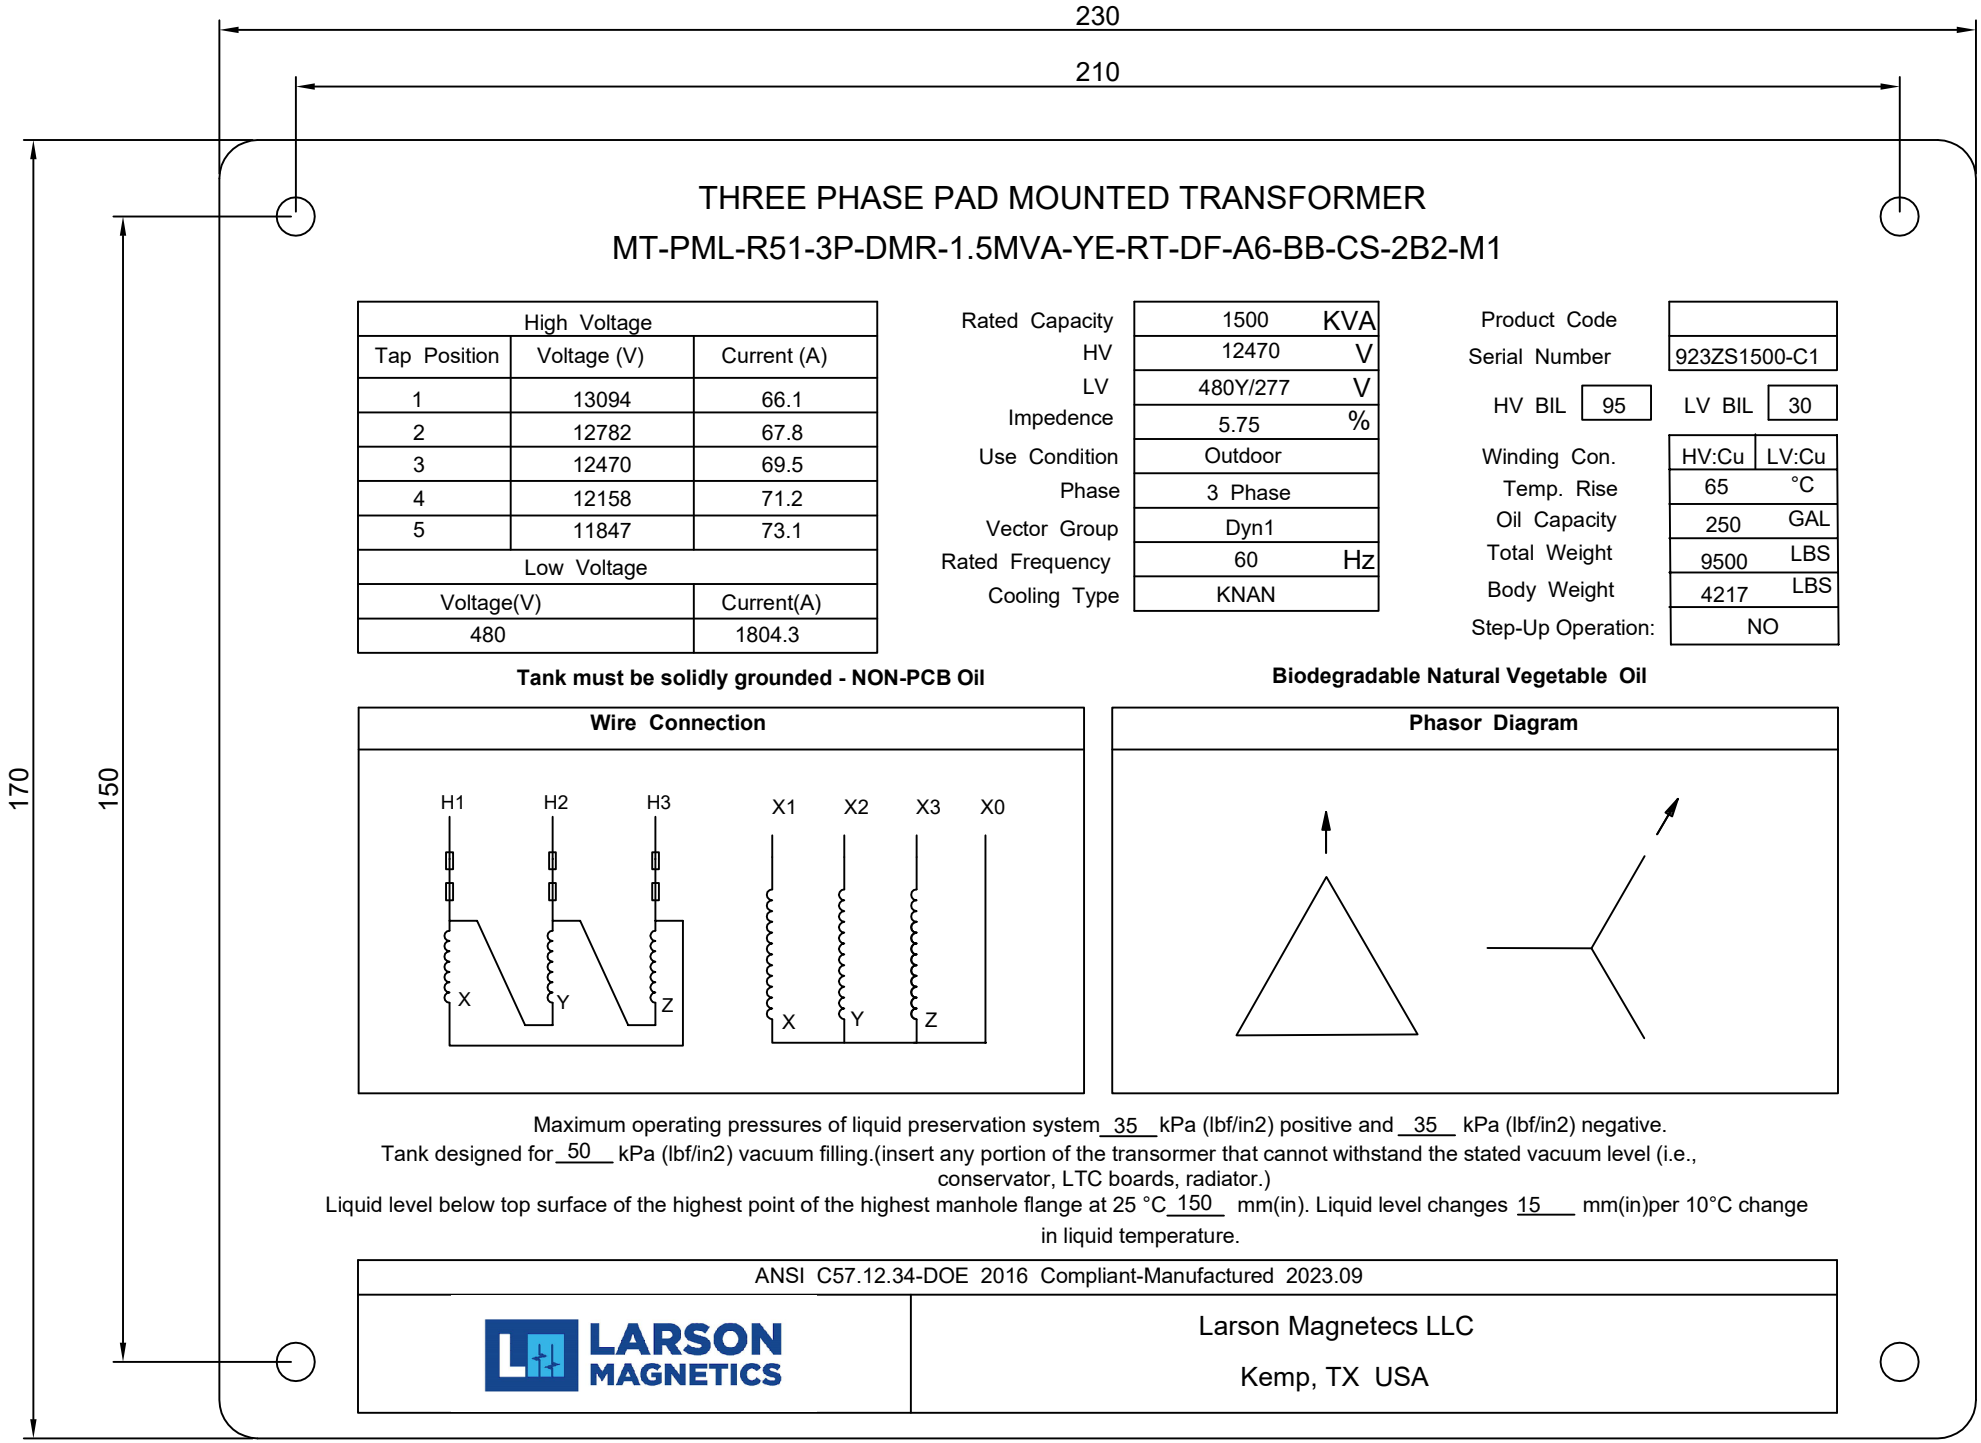


THREE PHASE PAD MOUNTED TRANSFORMER

MT-PML-R51-3P-DMR-1.5MVA-YE-RT-DF-A6-BB-CS-2B2-M1

High Voltage		
Tap Position	Voltage (V)	Current (A)
1	13094	66.1
2	12782	67.8
3	12470	69.5
4	12158	71.2
5	11847	73.1
Low Voltage		
Voltage(V)		Current(A)
480		1804.3

Rated Capacity	1500	KVA
HV	12470	V
LV	480Y/277	V
Impedence	5.75	%
Use Condition	Outdoor	
Phase	3 Phase	
Vector Group	Dyn1	
Rated Frequency	60	Hz
Cooling Type	KNAN	

Product Code			
Serial Number	923ZS1500-C1		
HV BIL	95	LV BIL	30
Winding Con.	HV:Cu	LV:Cu	
Temp. Rise	65	°C	
Oil Capacity	250	GAL	
Total Weight	9500	LBS	
Body Weight	4217	LBS	
Step-Up Operation:	NO		

Tank must be solidly grounded - NON-PCB Oil

Biodegradable Natural Vegetable Oil

Wire Connection

Phasor Diagram

Maximum operating pressures of liquid preservation system 35 kPa (lbf/in2) positive and 35 kPa (lbf/in2) negative.
Tank designed for 50 kPa (lbf/in2) vacuum filling.(insert any portion of the transormer that cannot withstand the stated vacuum level (i.e., conservator, LTC boards, radiator.)
Liquid level below top surface of the highest point of the highest manhole flange at 25 °C 150 mm(in). Liquid level changes 15 mm(in)per 10°C change in liquid temperature.

ANSI C57.12.34-DOE 2016 Compliant-Manufactured 2023.09

LARSON MAGNETICS

Larson Magnetecs LLC

Kemp, TX USA