210

170

150


230

LARSON MAGNETICS THREE PHASE DRY TYPE TRANSFORMER

PRIMARY		
TAP POSITION	VOLTAGE (V)	CURRENT (A)
1	COM.	
3	14490	
4	14145	
2	13800	26
5	13455	
6	13110	
SECONDARY		
VOLTAGE (V)	CURRENT (A)	
300V	1197	

RATED CAPACITY	622KVA	STANDARD	DOE2016
Input	13800Y/7968	PRODUCT CODE	XXX
Output	300V	SERIAL NO.	WE913SG622-Z01
IMPEDANCE	4~8 %		
USE CONDITION	OUTDOOR	TEMPERATURE RISE	115℃
PHASE	3 PHASE	INSULATION CLASS	220℃
VECTOR GROUP	YnD1		
RATED FREQUENCY	60 Hz	TOTAL WEIGHT	4630 lbs
COOLING TYPE	AN	MANUFACTURE DATE	2023. 11

WIRE CONNECTION

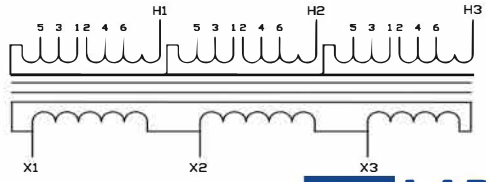

LARSON MAGNETICS