


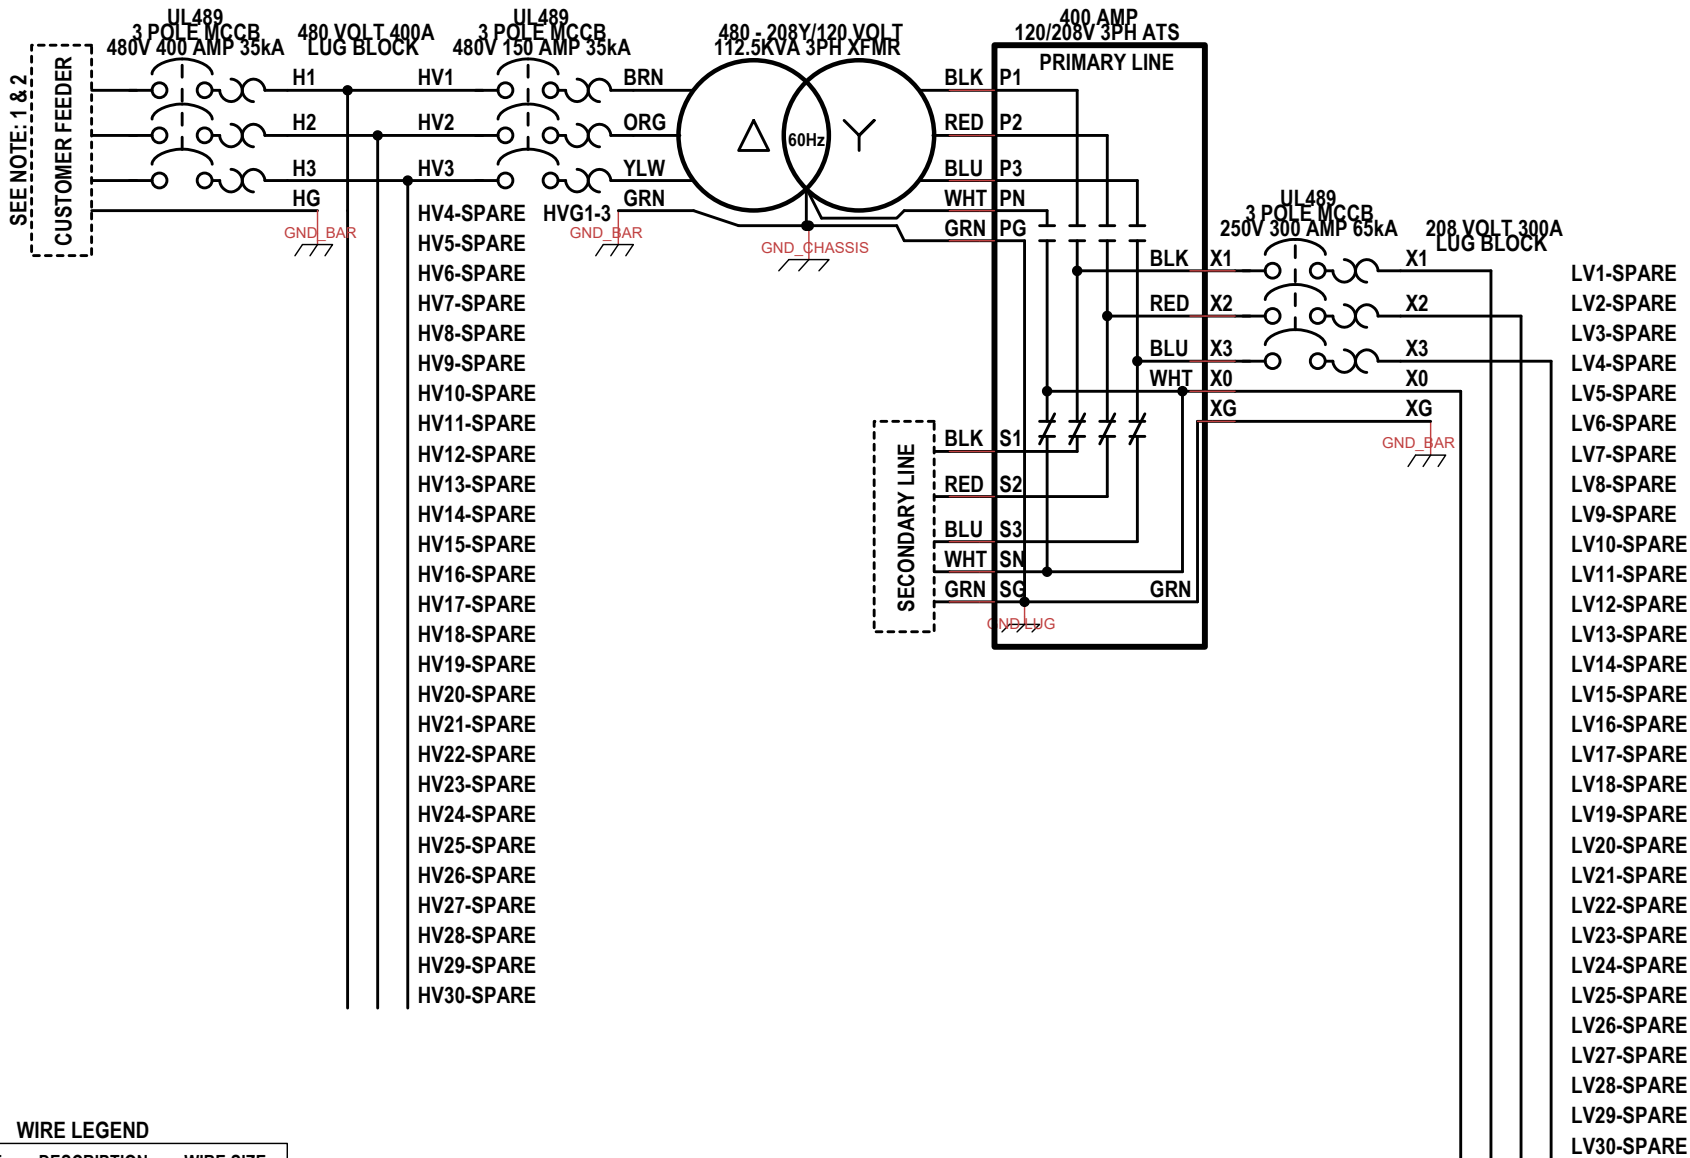

WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
H1	CABLE	600V THHN BROWN	#600 KCMIL cu
H2	CABLE	600V THHN ORANGE	#600 KCMIL cu
H3	CABLE	600V THHN YELLOW	#600 KCMIL cu
HG	CABLE	600V THHN GREEN	#2 AWG cu
HV1	CABLE	600V THHN BROWN	#1/0 AWG cu
HV2	CABLE	600V THHN ORANGE	#1/0 AWG cu
HV3	CABLE	600V THHN YELLOW	#1/0 AWG cu
HVG1-3	CABLE	600V THHN GREEN	#6 AWG cu
P1	CABLE	600V THHN BLACK	#350 KCMIL cu
P2	CABLE	600V THHN RED	#350 KCMIL cu
P3	CABLE	600V THHN BLUE	#350 KCMIL cu
PG	CABLE	600V THHN GREEN	#350 KCMIL cu
PN	CABLE	600V THHN WHITE	#4 AWG cu
X1	CABLE	600V THHN BLACK	#350 KCMIL cu
X2	CABLE	600V THHN RED	#350 KCMIL cu
X3	CABLE	600V THHN BLUE	#350 KCMIL cu
X0	CABLE	600V THHN WHITE	#350 KCMIL cu
XG	CABLE	600V THHN GREEN	#4 AWG cu

USER NOTES:

- 1) USE MAXIMUM 600V 400A WIRING
2) USE MAXIMUM 480V 400A INPUT DEVICE

Title MPD-CW2-T.400A-DE112.5ST-NS-1.Q2-M1		
Author David Downs		
File \\ 3PH 112.5KVA 208Y-120V 300A 3PH ATS MCB.	Document	
Revision 1.0	Date 04/01/2021	Sheets 1 of 1