


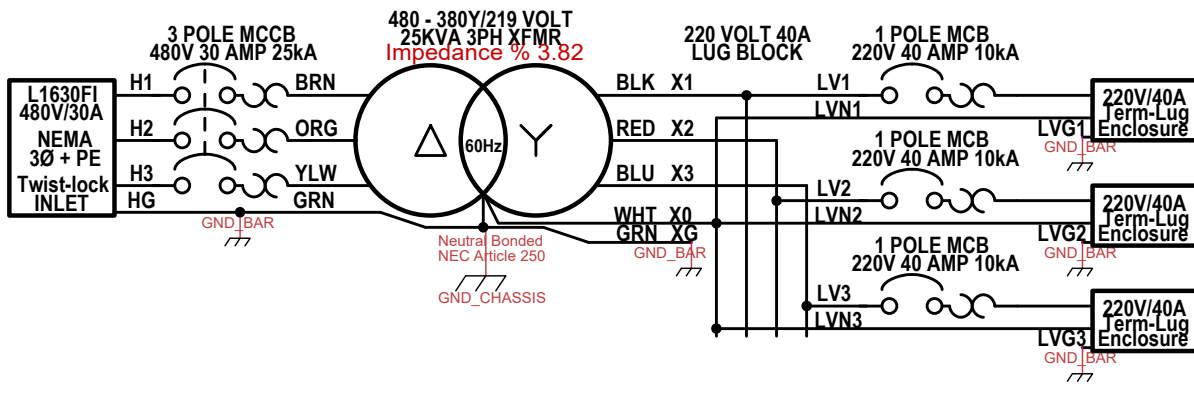

WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
H1	CABLE	600V THHN BROWN	#10 AWG cu
H2	CABLE	600V THHN ORANGE	#10 AWG cu
H3	CABLE	600V THHN YELLOW	#10 AWG cu
HG	CABLE	600V THHN GREEN	#10 AWG cu
X1	CABLE	600V THHN BLACK	#8 AWG cu
X2	CABLE	600V THHN RED	#8 AWG cu
X3	CABLE	600V THHN BLUE	#8 AWG cu
X0	CABLE	600V THHN WHITE	#8 AWG cu
XG	CABLE	600V THHN GREEN	#10 AWG cu
LV1	CABLE	600V THHN BLACK	#8 AWG cu
LV2	CABLE	600V THHN RED	#8 AWG cu
LV3	CABLE	600V THHN BLUE	#8 AWG cu
LVG1	CABLE	600V THHN GREEN	#10 AWG cu
LVG2	CABLE	600V THHN GREEN	#10 AWG cu
LVG3	CABLE	600V THHN GREEN	#10 AWG cu
LVN1	CABLE	600V THHN WHITE	#8 AWG cu
LVN2	CABLE	600V THHN WHITE	#8 AWG cu
LVN3	CABLE	600V THHN WHITE	#8 AWG cu

NOTES:

IEC 60076 permits +/- 10% tolerance in percentage impedance at the manufacturer's end.

Title MPD-CD2-NTL.30AB-DE25YL-DE-3.R13-3.TBX-M1		
Author David Downs		
File 3PH 25KVA 380Y-220V 40A 3PH MCB 3x40A1P I		Document
Revision 1.0	Date 01/04/2021	Sheets 1 of 1