


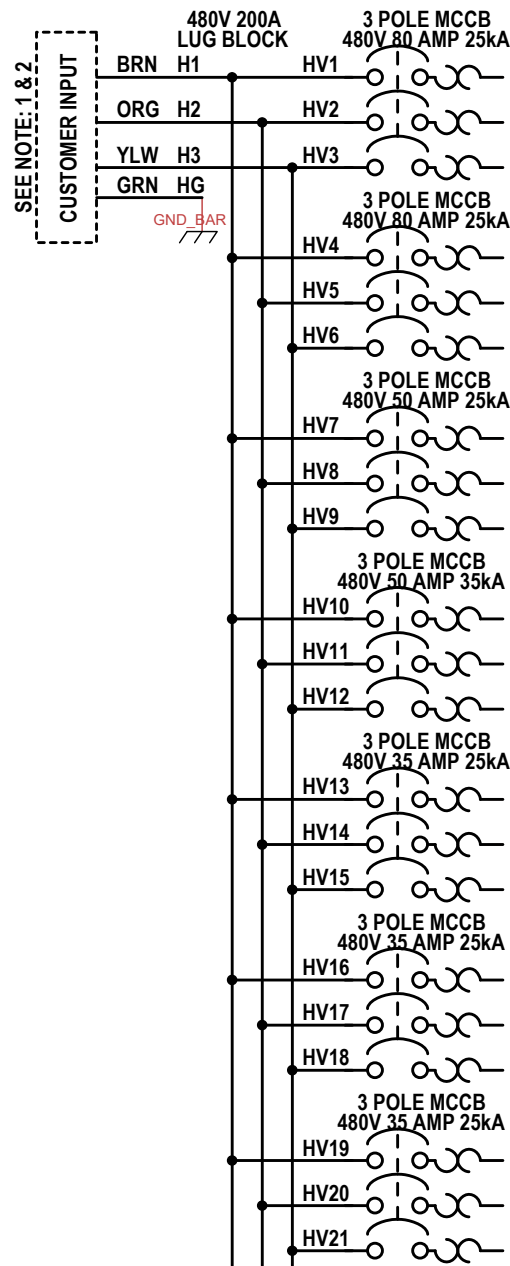

WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
H1	CABLE	600V THHN BROWN	#3/0 AWG cu
H2	CABLE	600V THHN ORANGE	#3/0 AWG cu
H3	CABLE	600V THHN YELLOW	#3/0 AWG cu
HG	CABLE	600V THHN GREEN	#6 AWG cu
HV1	CABLE	600V THHN BROWN	#4 AWG cu
HV2	CABLE	600V THHN ORANGE	#4 AWG cu
HV3	CABLE	600V THHN YELLOW	#4 AWG cu
HV4	CABLE	600V THHN BROWN	#4 AWG cu
HV5	CABLE	600V THHN ORANGE	#4 AWG cu
HV6	CABLE	600V THHN YELLOW	#4 AWG cu
HV7	CABLE	600V THHN BROWN	#8 AWG cu
HV8	CABLE	600V THHN ORANGE	#8 AWG cu
HV9	CABLE	600V THHN YELLOW	#8 AWG cu
HV10	CABLE	600V THHN BROWN	#8 AWG cu
HV11	CABLE	600V THHN ORANGE	#8 AWG cu
HV12	CABLE	600V THHN YELLOW	#8 AWG cu
HV13	CABLE	600V THHN BROWN	#10 AWG cu
HV14	CABLE	600V THHN ORANGE	#10 AWG cu
HV15	CABLE	600V THHN YELLOW	#10 AWG cu
HV16	CABLE	600V THHN BROWN	#10 AWG cu
HV17	CABLE	600V THHN ORANGE	#10 AWG cu
HV18	CABLE	600V THHN YELLOW	#10 AWG cu
HV19	CABLE	600V THHN BROWN	#10 AWG cu
HV20	CABLE	600V THHN ORANGE	#10 AWG cu
HV21	CABLE	600V THHN YELLOW	#10 AWG cu

USER NOTES:

- 1) USE MINIMUM 600V 200A WIRING
- 2) USE MINIMUM 480V 200A INPUT DEVICE

Title MPD-CD5-T.200A-DE0-Z-2.T22.T19-3.T17-M1		
Author David Downs		
File 200A 3PH MLO 2x3P80A 2x3P50A 3x3P35A.dsn	Document	
Revision 1.0	Date 08/24/2022	Sheets 1 of 1