


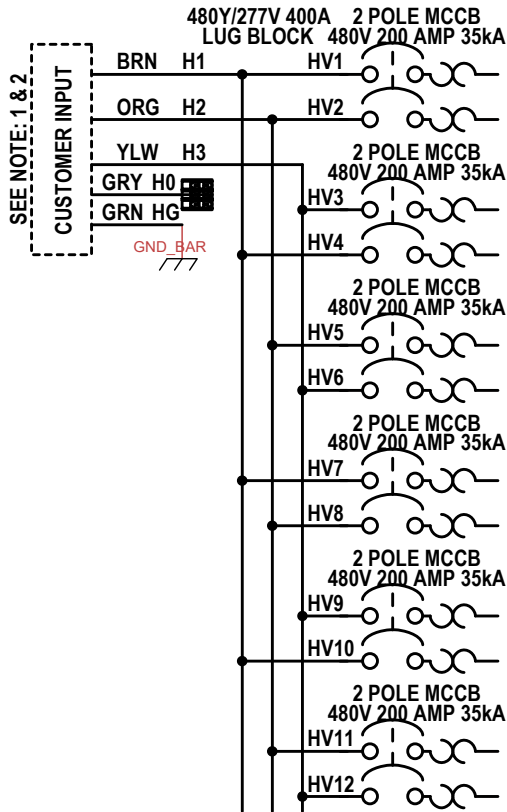

WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
H1	CABLE	600V THHN BROWN	#600 KCMIL cu
H2	CABLE	600V THHN ORANGE	#600 KCMIL cu
H3	CABLE	600V THHN YELLOW	#600 KCMIL cu
H0	CABLE	600V THHN GRAY	#600 KCMIL cu
HG	CABLE	600V THHN GREEN	#2 AWG cu
HV1	CABLE	600V THHN BROWN	#3/0 AWG cu
HV2	CABLE	600V THHN ORANGE	#3/0 AWG cu
HV3	CABLE	600V THHN YELLOW	#3/0 AWG cu
HV4	CABLE	600V THHN BROWN	#3/0 AWG cu
HV5	CABLE	600V THHN ORANGE	#3/0 AWG cu
HV6	CABLE	600V THHN YELLOW	#3/0 AWG cu
HV7	CABLE	600V THHN BROWN	#3/0 AWG cu
HV8	CABLE	600V THHN ORANGE	#3/0 AWG cu
HV9	CABLE	600V THHN YELLOW	#3/0 AWG cu
HV10	CABLE	600V THHN BROWN	#3/0 AWG cu
HV11	CABLE	600V THHN ORANGE	#3/0 AWG cu
HV12	CABLE	600V THHN YELLOW	#3/0 AWG cu

USER NOTES:

- 1) USE MINIMUM 600V 400A WIRING
- 2) USE MINIMUM 480Y/277V 3PH 400A INPUT SERVICE DEVICE

Title MPD-EB42-TL.400AB-YE0-6.T48-N3R-M1		
Author David Downs		
File \\Us ... 480Y-277V 400A 3PH MCB 6x2P200A.dsn		Document
Revision 1.0	Date 02/09/2023	Sheets 1 of 1