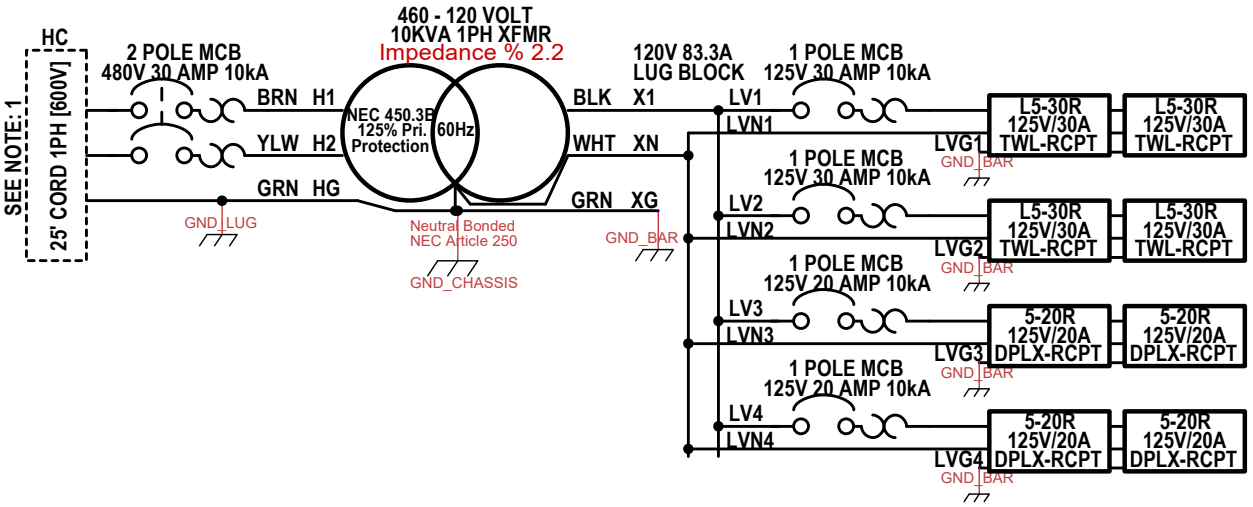


WIRE LEGEND

ID	TYPE	DESCRIPTION	WIRE SIZE
HC	CORD	600V TYPE SOOW	#10/3 AWG cu
H1	CABLE	600V THHN BROWN	#10 AWG cu
H2	CABLE	600V THHN YELLOW	#10 AWG cu
HG	CABLE	600V THHN GREEN	#10 AWG cu
X1	CABLE	600V THHN BLACK	#4 AWG cu
XN	CABLE	600V THHN WHITE	#4 AWG cu
XG	CABLE	600V THHN GREEN	#8 AWG cu
LV1	CABLE	600V THHN BLACK	#10 AWG cu
LV2	CABLE	600V THHN BLACK	#10 AWG cu
LV3	CABLE	600V THHN BLACK	#12 AWG cu
LV4	CABLE	600V THHN BLACK	#12 AWG cu
LVG1	CABLE	600V THHN GREEN	#10 AWG cu
LVG2	CABLE	600V THHN GREEN	#10 AWG cu
LVG3	CABLE	600V THHN GREEN	#12 AWG cu
LVG4	CABLE	600V THHN GREEN	#12 AWG cu
LVN1	CABLE	600V THHN WHITE	#10 AWG cu
LVN2	CABLE	600V THHN WHITE	#10 AWG cu
LVN3	CABLE	600V THHN WHITE	#12 AWG cu
LVN4	CABLE	600V THHN WHITE	#12 AWG cu

USER NOTES:

1) USE MINIMUM 480V 30A INPUT SERVICE DEVICE

IEC 60076 permits +/- 10% tolerance in percentage impedance at the manufacturer's end.

Title: MPD-CD1-BS.30AB-SE10SW-DZ-4.L05-4.N09-M1		
Author: David Downs		
File: 1PH 10KVA 120V 83.3A 1PH MLO 4xL5-30R 4x5		Document
Revision: 1.0	Date: 04/10/2023	Sheets: 1 of 1