

PRELIMINARY PHOTOMETRIC REPORT

EPL-HB-50LED-60DB-50K

LM-63 report generated from supplied IES photometric data

Preliminary Photometric Analysis Based on Assumed Installation Conditions.

LUMINAIRE LUMENS

6,287 lm

MAXIMUM CANDELA

5,091.5 cd

INPUT POWER

49.92 W

PRIMARY CASE

20 ft

Required Disclaimer

This report is a preliminary photometric analysis generated from the supplied IES photometric data using assumed installation conditions. It is intended only for conceptual planning and fixture evaluation. Actual lighting performance will vary depending on mounting height, aiming, room geometry, surface reflectance, obstructions, maintenance factors and environmental conditions. Final lighting layouts should be performed using project-specific dimensions and requirements.

Manufacturer metadata: LARSON | Test date: 2025.01.17 | Report generated from EPL-HB-50LED-60DB-50K.IES

1. Fixture Summary

Parameter	Result	Basis / Notes
Fixture model	EPL-HB-50LED-60DB-50K	[LUMINAIRE] field
Manufacturer	LARSON	[MANUFAC] field
Lamp quantity / lamp lumens	1 / 6,287.02 lm	IES numeric header
Total luminaire lumens	6,287.02 lm	IES listed; integrated candela flux 6,286.66 lm
Luminaire efficiency	Not separately determinable	IES does not provide independent bare-lamp flux; listed/integrated ratio is not treated as optical efficiency
Input power / efficacy	49.92 W / 125.9 lm/W	Calculated from IES listed lumens and input watts
Maximum candela (CBCP)	5,091.51 cd	At C180.0 deg, vertical angle 1.5 deg
Beam angle (50% CBCP)	61.9 deg (estimate)	Full contiguous envelope around nadir on peak great-circle
Field angle (10% CBCP)	109.5 deg (estimate)	Full contiguous envelope around nadir on peak great-circle
Photometric type	Type C	LM-63 photometric type 1
Distribution classification	Type V-like / very broad (estimate)	Not explicitly classified in IES; inferred from full C-plane coverage and practical footprint
Symmetry description	Near rotational, not exact	16 unique C-planes plus 360-deg duplicate; weighted C-plane CV approximately 2.3%
Flux distribution	6,285 lm down / 2 lm up	100.0% lower hemisphere / 0.0% upper hemisphere

Beam-angle interpretation

The peak intensity is off-axis, and the reported beam and field angles are broad angular envelopes around nadir. Practical ground-plane footprints are calculated separately from horizontal illuminance and are used for spacing estimates.

Assumptions and Calculation Method

1	Fixture mounted 20 ft (6.1 m) above the primary calculation plane; additional cases at 10, 15, 25 and 30 ft.
2	Fixture aimed straight downward at 0 deg tilt.
3	Flat, unobstructed 50 ft x 50 ft calculation area.
4	Calculation grid spacing of 2 ft; primary numeric grid uses 25 x 25 points from -24 ft to +24 ft.
5	Fixture centered in the calculation area.
6	No reflected light from walls, ceilings or ground; direct component only.
7	Light Loss Factor (LLF) = 0.80 applied uniformly.
8	Standard atmospheric conditions; no atmospheric attenuation modeled.
9	No obstructions, shielding, poles, equipment or site geometry.
10	Single fixture unless a conceptual multi-fixture example is explicitly shown.


Point-by-point direct illuminance method

At each calculation point, horizontal and vertical offsets are converted to LM-63 Type C vertical angle gamma and C-plane azimuth. Candela is bilinearly interpolated from the measured IES table. Horizontal illuminance is calculated as $E = I(\text{gamma}, C) \times \cos(\text{gamma}) / d^2$, then multiplied by the 0.80 LLF. Distances are in feet, so the result is foot-candles.

No room-cavity, radiosity, interreflection, dirt-depreciation model, glare model, emergency criterion or code-compliance assessment is included.

2. Polar Candela Distribution


Polar Candela Distribution - Actual IES C-Plane Data

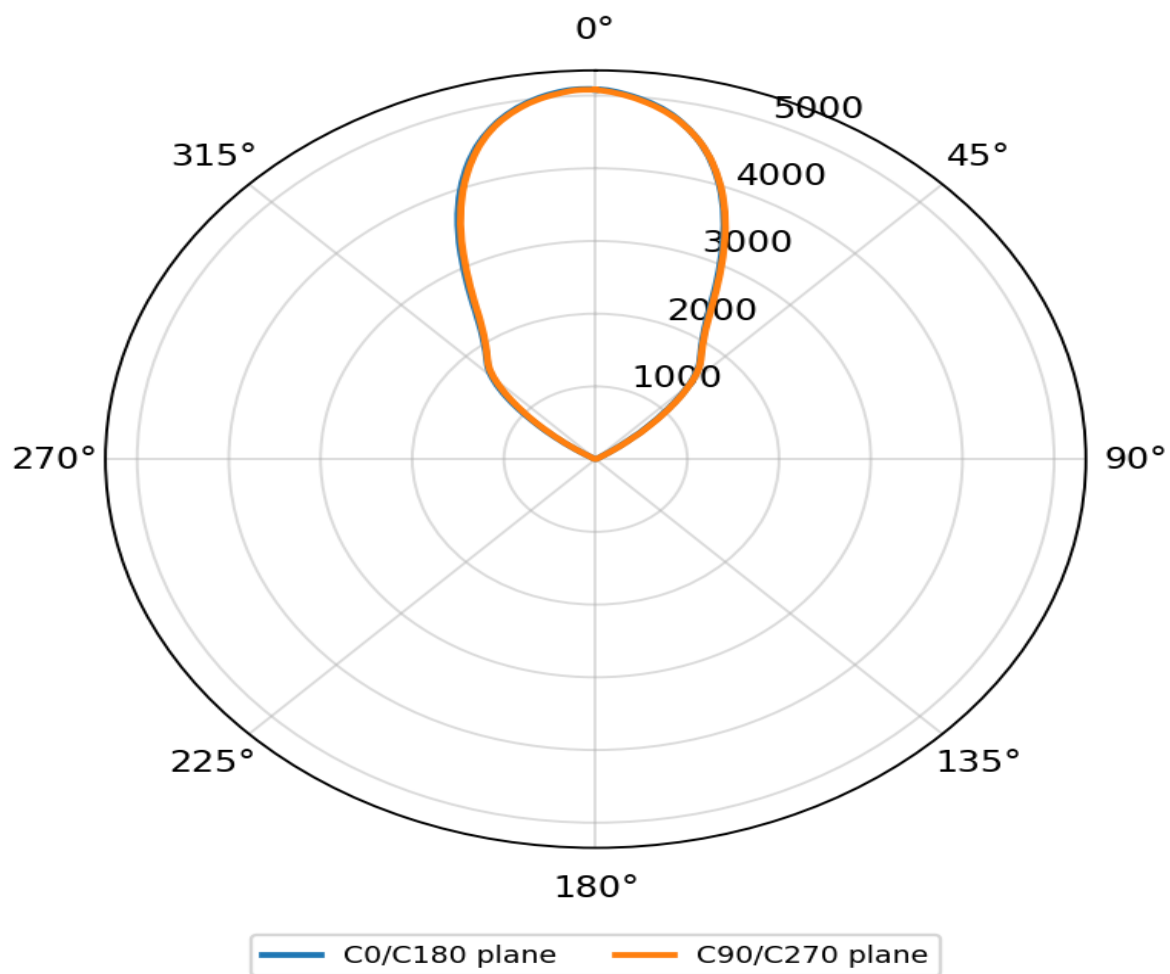

The plot uses actual candela values from the C0/C180 and C90/C270 great-circle planes. Because the file contains 17 C-planes, all plan-view calculations use the complete measured dataset rather than a rotational average.

3. Beam Angle Diagram


Beam Angle Diagram - Thresholds Referenced to Global CBCP

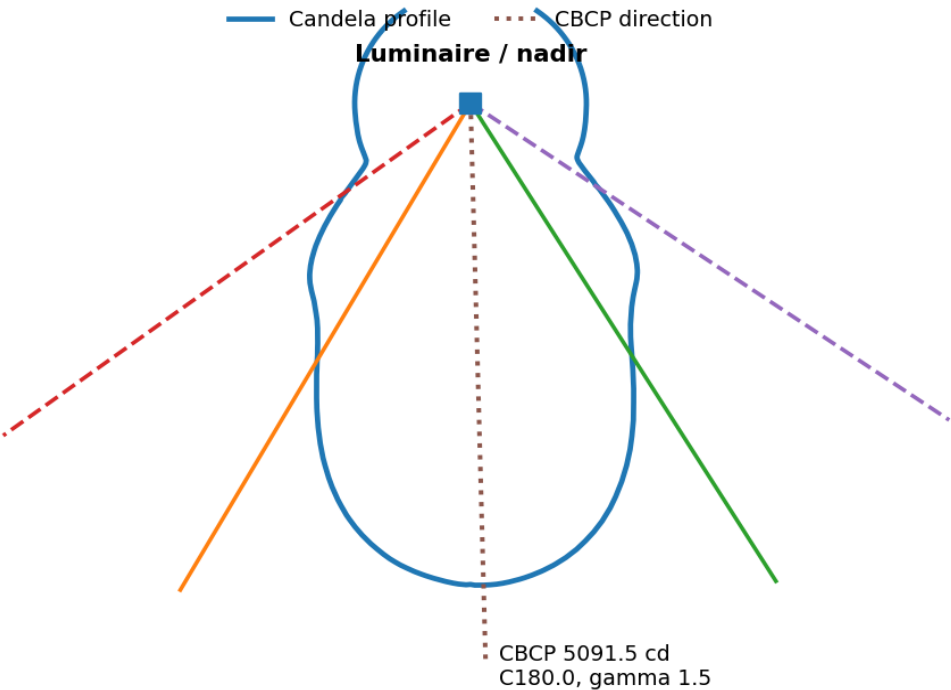

50% candela envelope: 61.9 deg | 10% field envelope: 109.5 deg

Item	Result	Interpretation
CBCP	5091.51 cd at C180.0, gamma 1.5	Near-nadir peak
50% beam envelope	-30.1 deg to 31.8 deg (61.9 deg)	Estimated around nadir
10% field envelope	-53.8 deg to 55.7 deg (109.5 deg)	Estimated around nadir

4. Side-View Beam Profile

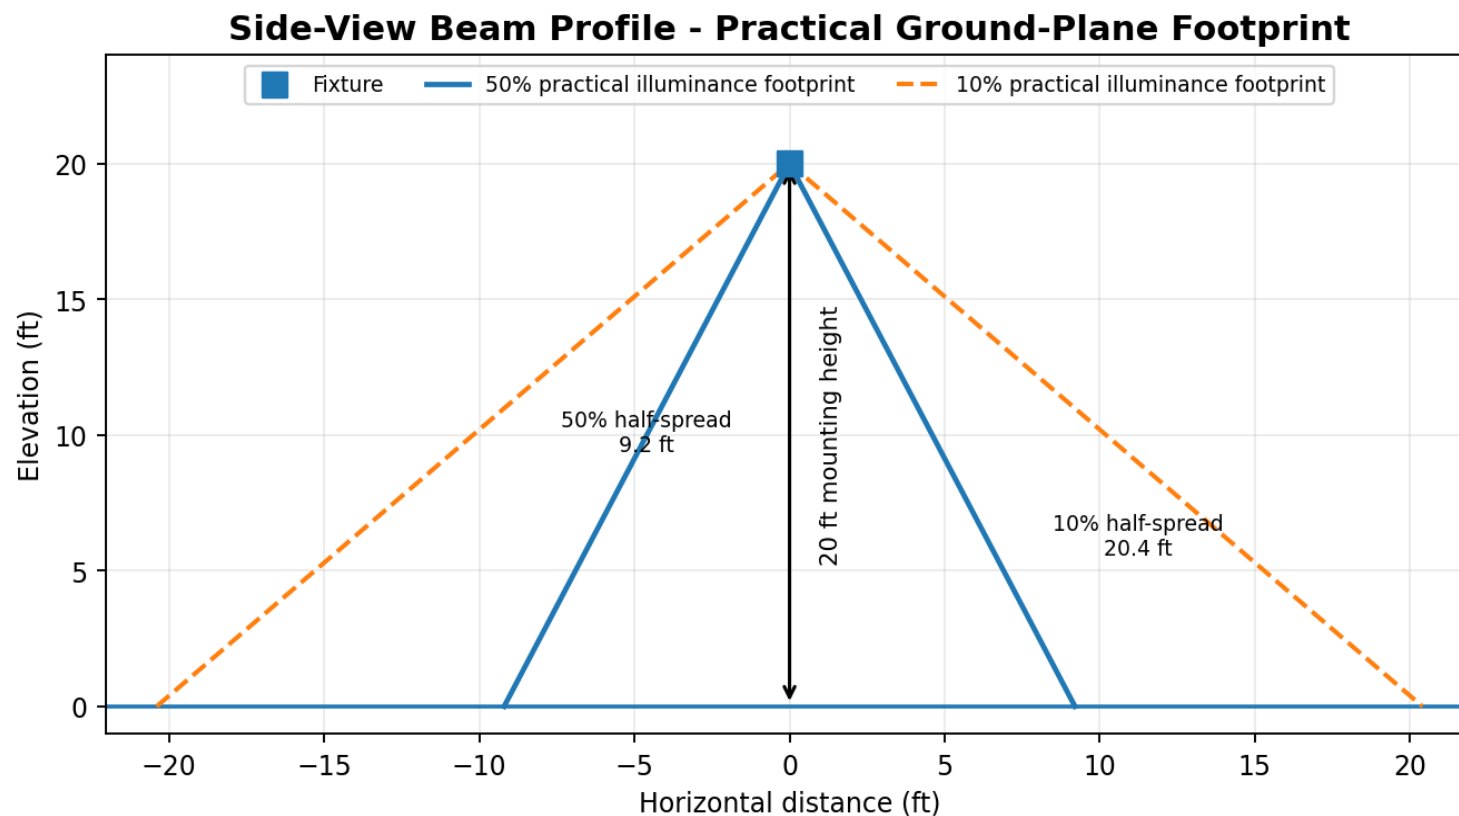


Engineering interpretation

At 20 ft, the practical 50% horizontal-illuminance footprint is approximately 18.0 x 18.0 ft and the 10% footprint is approximately 40.4 x 40.4 ft. These ground-plane footprints are used for spacing estimates because the candela envelope is very broad and does not behave as a conventional narrow cone.

5. Top-View Beam Footprint

Top-View Practical Beam Footprints at Requested Mounting Heights

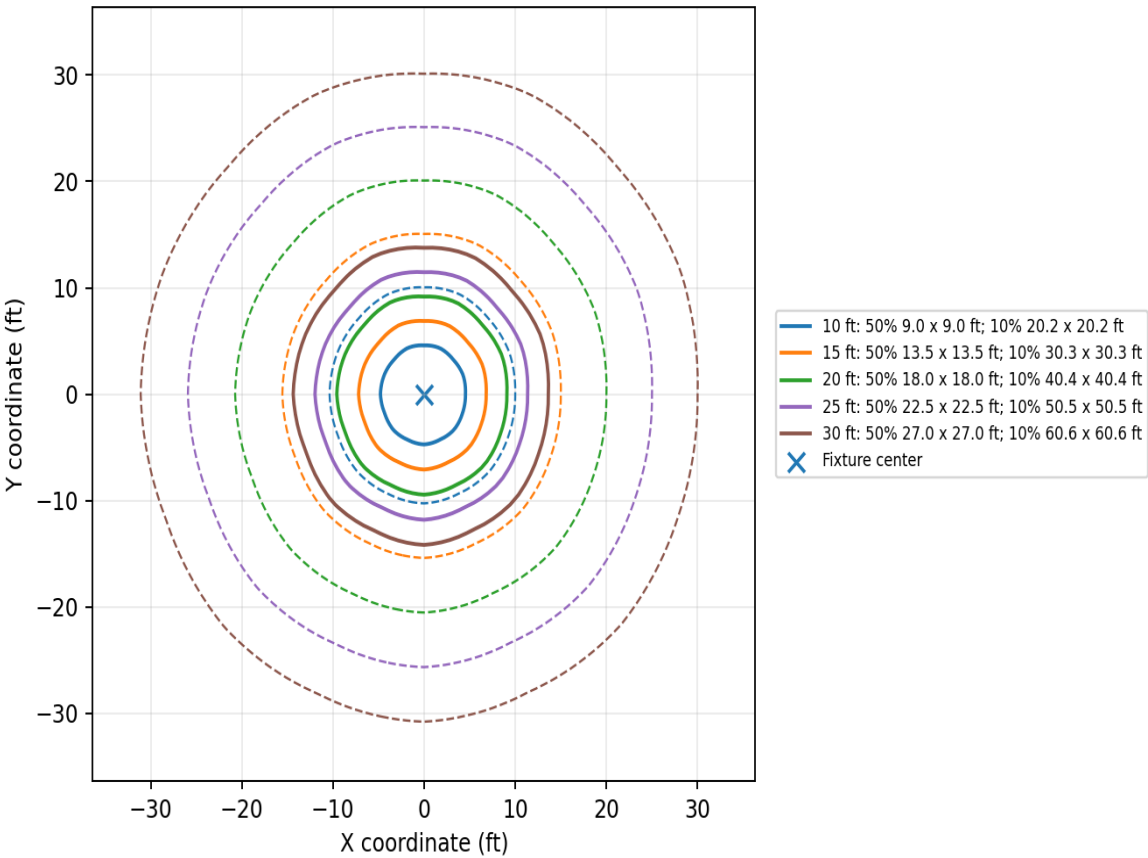


Height	50% footprint (ft)	10% footprint (ft)
10 ft	9.0 x 9.0	20.2 x 20.2
15 ft	13.5 x 13.5	30.3 x 30.3
20 ft	18.0 x 18.0	40.4 x 40.4
25 ft	22.5 x 22.5	50.5 x 50.5
30 ft	27.0 x 27.0	60.6 x 60.6

Footprints are practical horizontal-illuminance contours at 50% and 10% of the maximum value calculated at each mounting height. They are not conventional 50% and 10% candela cone intersections.

6. Iso-Foot-Candle Contour Map - Primary 20 ft Case

Iso-Foot-Candle Contour Map - 20 ft Mounting Height, LLF 0.80

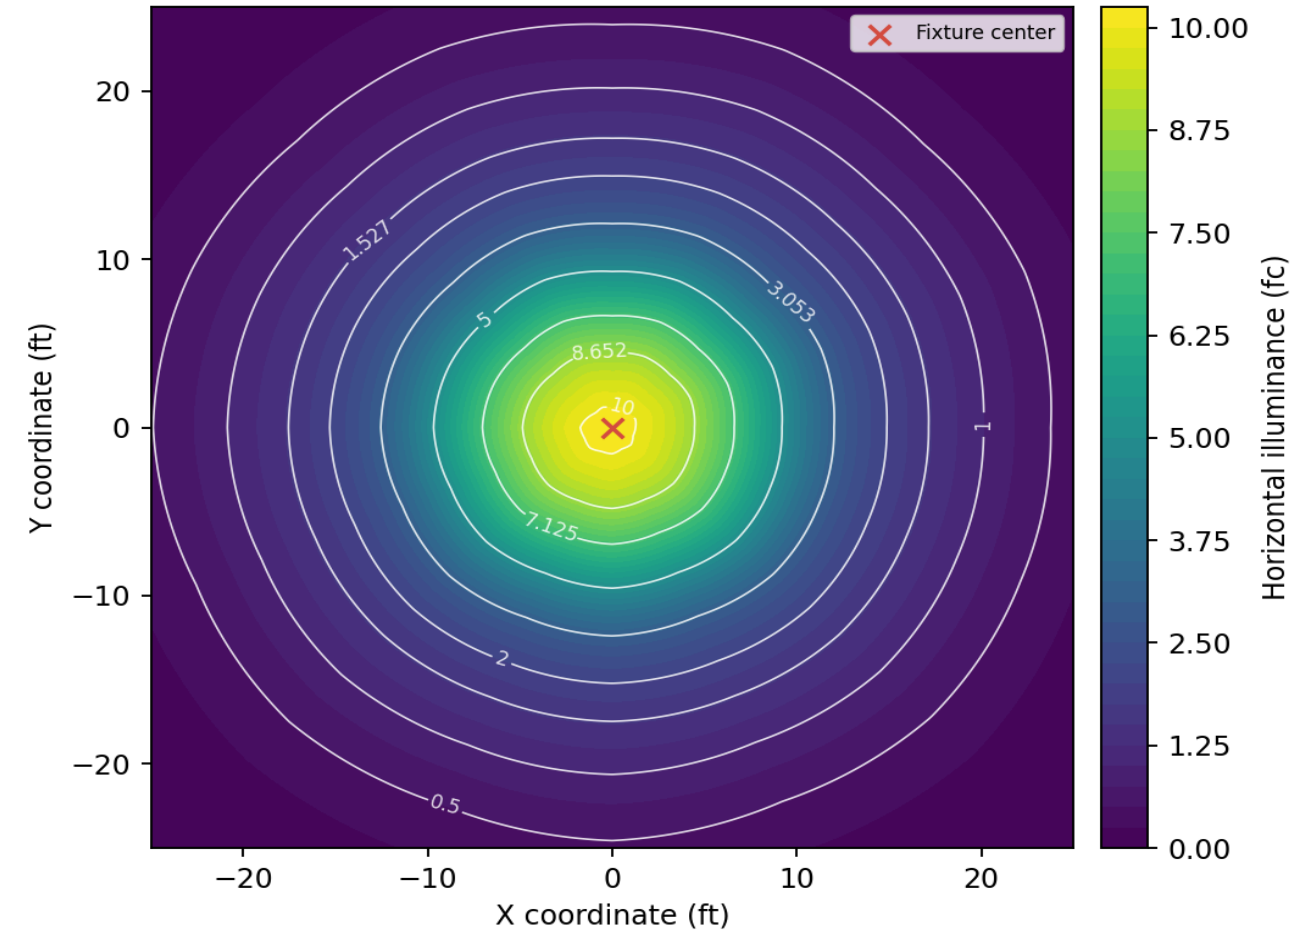

Requested contour	Status
20 fc	Not reached
15 fc	Not reached
10 fc	Reached
5 fc	Reached
2 fc	Reached
1 fc	Reached
0.5 fc	Reached

Dense-map maximum: 10.178 fc. Supplemental visible isolines: 1.527, 3.053, 7.125, 8.652 fc. Requested contour values that exceed the calculated maximum are identified as not reached rather than plotted.


7. Foot-Candle Grid - 20 ft Mounting Height

MAXIMUM FC	MINIMUM FC	AVERAGE FC	AVG/MIN	MAX/MIN
10.159	0.022	1.931	88.85	467.45

Y\X	-24	-22	-20	-18	-16	-14	-12	-10	-8	-6	-4	-2	0	2	4	6	8	10	12	14	16	18	20	22	24
24	0.030	0.052	0.084	0.124	0.172	0.232	0.294	0.359	0.410	0.452	0.482	0.497	0.496	0.495	0.478	0.444	0.400	0.346	0.279	0.216	0.154	0.107	0.068	0.040	0.022
22	0.052	0.083	0.130	0.188	0.262	0.342	0.431	0.521	0.600	0.661	0.706	0.731	0.732	0.728	0.701	0.653	0.589	0.509	0.414	0.322	0.238	0.165	0.109	0.066	0.039
20	0.085	0.131	0.189	0.275	0.372	0.483	0.604	0.727	0.841	0.927	0.991	1.026	1.029	1.024	0.986	0.919	0.832	0.712	0.586	0.463	0.345	0.247	0.165	0.107	0.066
18	0.126	0.190	0.277	0.378	0.509	0.657	0.815	0.976	1.128	1.243	1.326	1.373	1.382	1.370	1.320	1.236	1.117	0.962	0.797	0.634	0.483	0.347	0.245	0.163	0.103
16	0.178	0.267	0.378	0.512	0.669	0.860	1.062	1.259	1.435	1.578	1.680	1.745	1.759	1.741	1.674	1.569	1.422	1.243	1.042	0.836	0.641	0.481	0.342	0.233	0.150
14	0.240	0.351	0.494	0.665	0.864	1.085	1.325	1.546	1.760	1.976	2.146	2.250	2.270	2.245	2.135	1.962	1.746	1.531	1.302	1.059	0.836	0.632	0.458	0.315	0.207
12	0.307	0.446	0.619	0.829	1.072	1.328	1.577	1.857	2.177	2.542	2.882	3.083	3.117	3.069	2.859	2.519	2.158	1.839	1.560	1.301	1.040	0.795	0.580	0.405	0.269
10	0.376	0.544	0.750	0.996	1.270	1.549	1.858	2.237	2.764	3.414	4.042	4.374	4.439	4.347	3.993	3.365	2.719	2.208	1.837	1.529	1.239	0.959	0.709	0.499	0.334
8	0.442	0.633	0.871	1.150	1.443	1.765	2.185	2.772	3.564	4.531	5.423	5.942	6.035	5.915	5.364	4.451	3.480	2.710	2.150	1.743	1.417	1.111	0.827	0.579	0.385
6	0.498	0.712	0.975	1.275	1.589	1.985	2.559	3.438	4.546	5.699	6.780	7.489	7.616	7.456	6.716	5.599	4.441	3.340	2.498	1.955	1.563	1.228	0.915	0.643	0.427
4	0.545	0.776	1.054	1.368	1.710	2.185	2.941	4.085	5.462	6.809	7.922	8.725	8.910	8.697	7.844	6.707	5.343	3.958	2.823	2.118	1.668	1.310	0.977	0.690	0.460
2	0.576	0.818	1.108	1.426	1.794	2.334	3.231	4.548	6.097	7.591	8.776	9.505	9.770	9.480	8.701	7.442	5.879	4.301	3.025	2.223	1.731	1.359	1.015	0.715	0.476
0	0.591	0.837	1.130	1.449	1.830	2.398	3.354	4.753	6.353	7.900	9.141	9.933	10.159	9.801	8.921	7.599	5.994	4.365	3.061	2.245	1.747	1.369	1.020	0.716	0.475
-2	0.572	0.814	1.103	1.423	1.789	2.323	3.201	4.508	6.058	7.565	8.823	9.661	9.894	9.586	8.693	7.387	5.824	4.247	2.994	2.209	1.724	1.353	1.007	0.708	0.471
-4	0.535	0.767	1.046	1.359	1.702	2.167	2.894	4.008	5.444	6.900	8.131	8.806	9.104	8.750	8.033	6.771	5.292	3.862	2.770	2.095	1.655	1.298	0.963	0.676	0.449
-6	0.484	0.698	0.962	1.262	1.580	1.967	2.546	3.459	4.654	5.927	6.874	7.522	7.844	7.476	6.794	5.817	4.535	3.353	2.474	1.927	1.547	1.207	0.891	0.623	0.412
-8	0.423	0.615	0.855	1.138	1.443	1.772	2.212	2.859	3.750	4.634	5.390	5.991	6.265	5.957	5.329	4.549	3.657	2.780	2.168	1.744	1.411	1.088	0.795	0.557	0.367
-10	0.356	0.527	0.746	1.004	1.284	1.569	1.900	2.327	2.849	3.428	3.948	4.427	4.644	4.401	3.904	3.365	2.784	2.286	1.873	1.547	1.248	0.954	0.694	0.481	0.313
-12	0.299	0.446	0.632	0.857	1.107	1.364	1.622	1.898	2.206	2.523	2.850	3.137	3.271	3.118	2.817	2.489	2.178	1.877	1.605	1.339	1.065	0.807	0.586	0.403	0.261
-14	0.243	0.363	0.518	0.706	0.920	1.149	1.362	1.566	1.767	1.960	2.149	2.291	2.357	2.283	2.136	1.944	1.754	1.552	1.342	1.115	0.877	0.663	0.477	0.327	0.211
-16	0.189	0.286	0.410	0.562	0.739	0.916	1.099	1.277	1.435	1.572	1.692	1.776	1.813	1.774	1.687	1.563	1.422	1.255	1.068	0.879	0.700	0.525	0.376	0.255	0.162
-18	0.140	0.216	0.314	0.433	0.560	0.699	0.845	0.988	1.121	1.247	1.347	1.411	1.438	1.407	1.338	1.231	1.097	0.960	0.813	0.666	0.527	0.402	0.286	0.192	0.121
-20	0.100	0.153	0.231	0.312	0.406	0.510	0.620	0.727	0.832	0.936	1.020	1.075	1.099	1.069	1.007	0.919	0.809	0.701	0.592	0.483	0.379	0.289	0.208	0.138	0.086
-22	0.069	0.109	0.153	0.214	0.283	0.355	0.434	0.512	0.594	0.671	0.736	0.780	0.800	0.774	0.725	0.657	0.574	0.493	0.414	0.335	0.263	0.195	0.139	0.096	0.057
-24	0.044	0.068	0.099	0.137	0.185	0.239	0.289	0.342	0.406	0.463	0.509	0.541	0.557	0.537	0.502	0.452	0.393	0.327	0.277	0.220	0.168	0.125	0.088	0.058	0.036

Grid values are direct horizontal illuminance in foot-candles with LLF 0.80. The grid uses 2 ft spacing and excludes the outer 1 ft boundary of the nominal 50 ft x 50 ft calculation area.

8. Beam Cross Sections

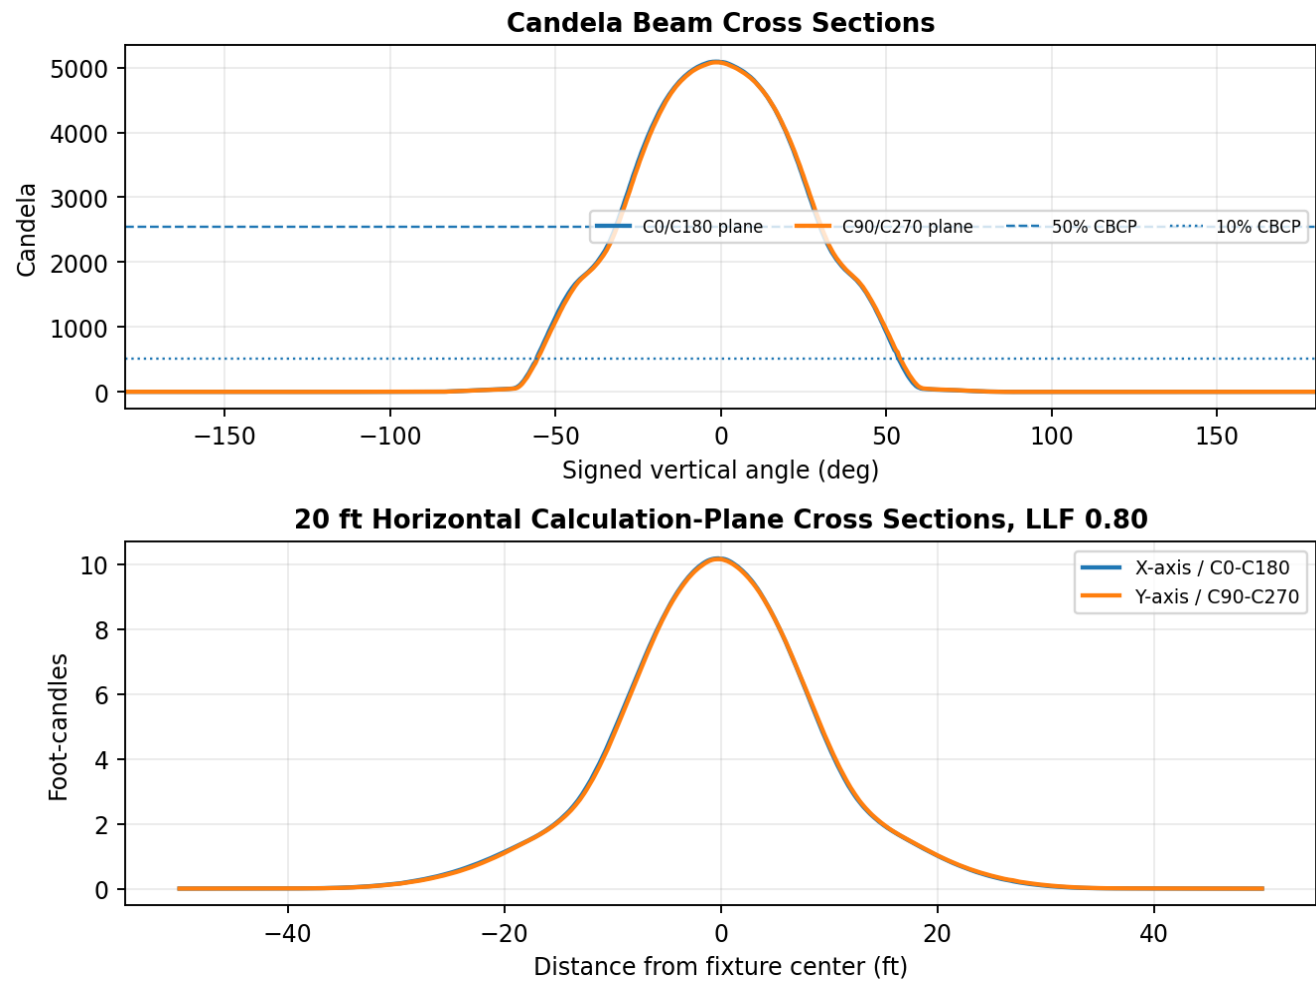

Section	Peak / center result	Engineering note
C0/C180 candela	5091.5 cd	Measured great-circle plane
C90/C270 candela	5080.8 cd	Measured great-circle plane
X-axis at 20 ft	10.179 fc	Horizontal plane, LLF 0.80
Y-axis at 20 ft	10.159 fc	Horizontal plane, LLF 0.80

9. Spacing Recommendations - Engineering Estimates

Spacing basis	C0/C180 axis	C90/C270 axis	Basis
Maximum spacing for 50% footprint overlap	18.0 ft	18.0 ft	Approximately the full 50% practical footprint
Recommended conceptual uniform spacing	15 ft	15 ft	About 70% of the mean 50% footprint dimension
Approximate spacing criterion (SC)	0.75	0.75	Recommended spacing / 20 ft mounting height

Conceptual spacing range at 20 ft



15 ft recommended; approximately 18 x 18 ft maximum for nominal 50% footprint overlap. The recommended spacing is intentionally conservative because this is a direct-only calculation with no interreflection. At maximum spacing, adjacent 50% footprints only meet or overlap slightly; closer spacing generally improves uniformity.

Spacing limitations and required project checks

Final spacing must be evaluated against required maintained illuminance, task category, emergency-lighting criteria, glare limits, mounting restrictions, structural positions, obstructions, surface reflectance and the number of fixtures. The SC value above is an engineering ratio derived from the calculated practical footprint; it is not a manufacturer-published spacing criterion.

10. Multiple Fixture Layout Examples - Two and Four Fixtures



Conceptual Multiple-Fixture Layouts - 15 ft Spacing at 20 ft Mounting Height

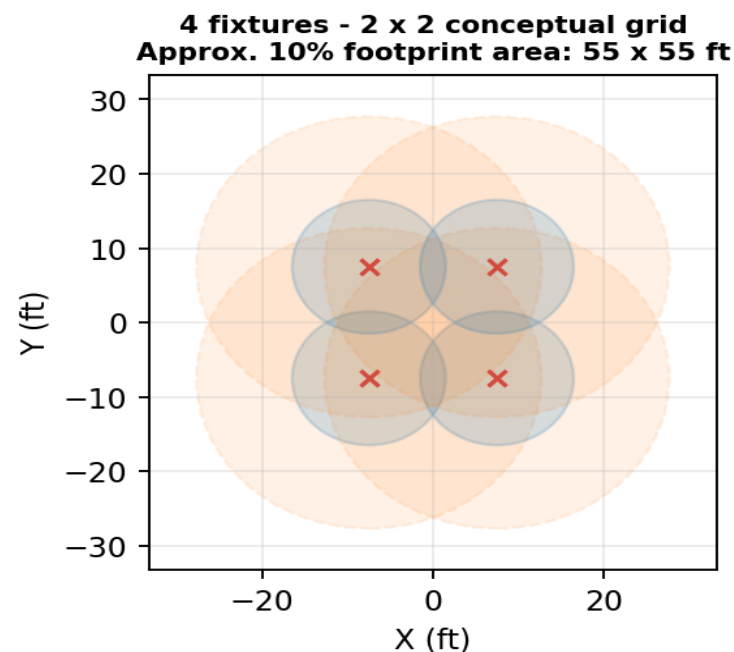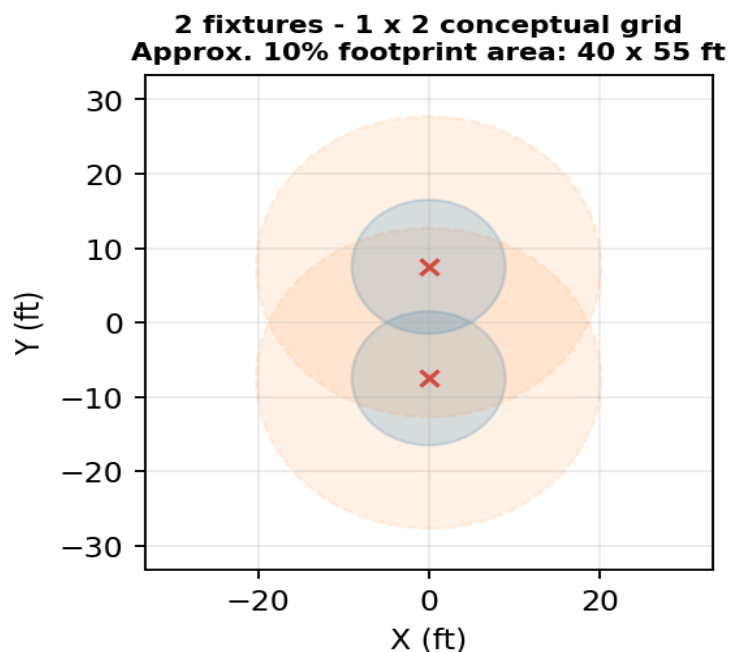

Red X marks show fixture centers. Blue areas represent approximate 50% practical footprints and orange areas represent 10% practical footprints. These examples use the estimated spacing at 20 ft mounting height and do not imply a site-specific lighting design.

10. Multiple Fixture Layout Examples - Six and Nine Fixtures

Conceptual Multiple-Fixture Layouts - 15 ft Spacing at 20 ft Mounting Height

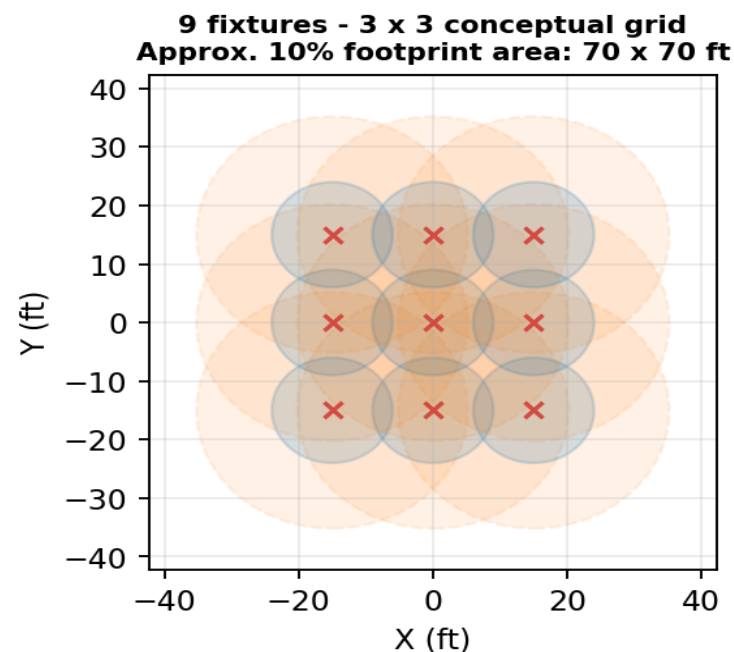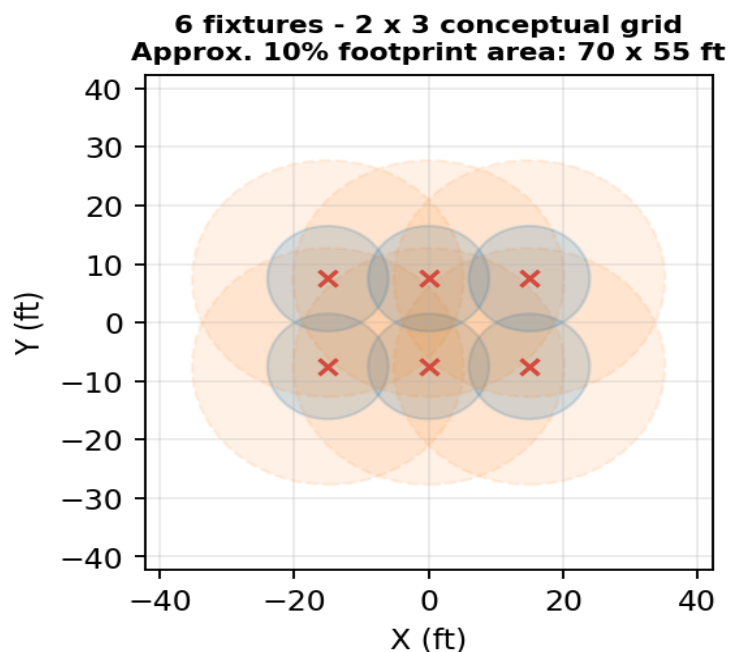

Approximate illuminated-area dimensions are bounding dimensions of the 10% practical footprints, not guaranteed maintained-lighting limits. Actual multi-fixture foot-candle levels require a project-specific calculation using exact site geometry and fixture coordinates.

11. Performance Summary

BEAM TYPE

Very broad, off-axis Type V-like distribution with 100.0% of integrated flux in the lower hemisphere.

WIDE VS. NARROW

Wide. The practical 50% footprint is large relative to mounting height and significant intensity remains at high vertical angles.

BEST MOUNTING HEIGHT RANGE

15-30 ft for broad area coverage, subject to required maintained illuminance and spacing.

TYPICAL APPLICATIONS

Conceptual uses inferred from the distribution include broad ambient area lighting, low-bay open areas, walkways, equipment surroundings and perimeter zones. Application suitability and product certifications are not established by the IES file.

STRENGTHS

Broad coverage, generous beam overlap potential, and relatively gradual edge falloff. Multiple C-planes support an accurate asymmetric calculation.

LIMITATIONS

Low candela concentration compared with narrow-beam optics; high mounting heights may require closer spacing or more fixtures. No reflected-light contribution, glare evaluation, certification review or site-specific obstruction model is included.

Interpretive boundary


Applications and performance interpretations are based only on the photometric shape and assumed conditions. They are not product certification, hazardous-location suitability, code-compliance or environmental-rating claims.

Appendix A. C-Plane Beam and Field Edge Data

C-plane	Plane peak cd	50% width deg	10% width deg	50% edge range deg	Final lumen summary		
0.0	5091.4	61.9	109.5	-31.8 to 30.1	Vertical zone	Lumens	Percent of integrated
22.5	5089.2	61.8	109.5	-31.0 to 30.8	0-30 deg	3,290.1	52.3%
45.0	5087.3	61.8	109.5	-31.6 to 30.2	0-60 deg	6,218.0	98.9%
67.5	5084.0	61.8	109.5	-30.7 to 31.0	0-90 deg	6,285.0	100.0%
90.0	5080.6	61.8	109.7	-31.3 to 30.4	90-180 deg	1.6	0.0%
112.5	5079.5	61.7	109.6	-30.5 to 31.2	0-180 deg	6,286.7	100.0%
135.0	5079.5	61.7	109.6	-31.1 to 30.6	Angular edge method For each C-plane, the measured plane is paired with its opposite C-plane to form a full sphere. Values are interpolated at 0.2-deg resolution and are engineering estimates.		
157.5	5079.5	61.8	109.5	-30.4 to 31.4			
180.0	5091.4	61.9	109.5	-30.1 to 31.8			
202.5	5089.2	61.8	109.5	-30.8 to 31.0			
225.0	5087.3	61.8	109.5	-30.2 to 31.6			
247.5	5084.0	61.8	109.5	-31.0 to 30.7			
270.0	5080.6	61.8	109.7	-30.4 to 31.3			
292.5	5079.5	61.7	109.6	-31.2 to 30.5			
315.0	5079.5	61.7	109.6	-30.6 to 31.1			
337.5	5079.5	61.8	109.5	-31.4 to 30.4			

Appendix B. Supplemental 10 ft Contours and Final Disclaimer

Iso-Foot-Candle Contour Map - 10 ft Mounting Height, LLF 0.80

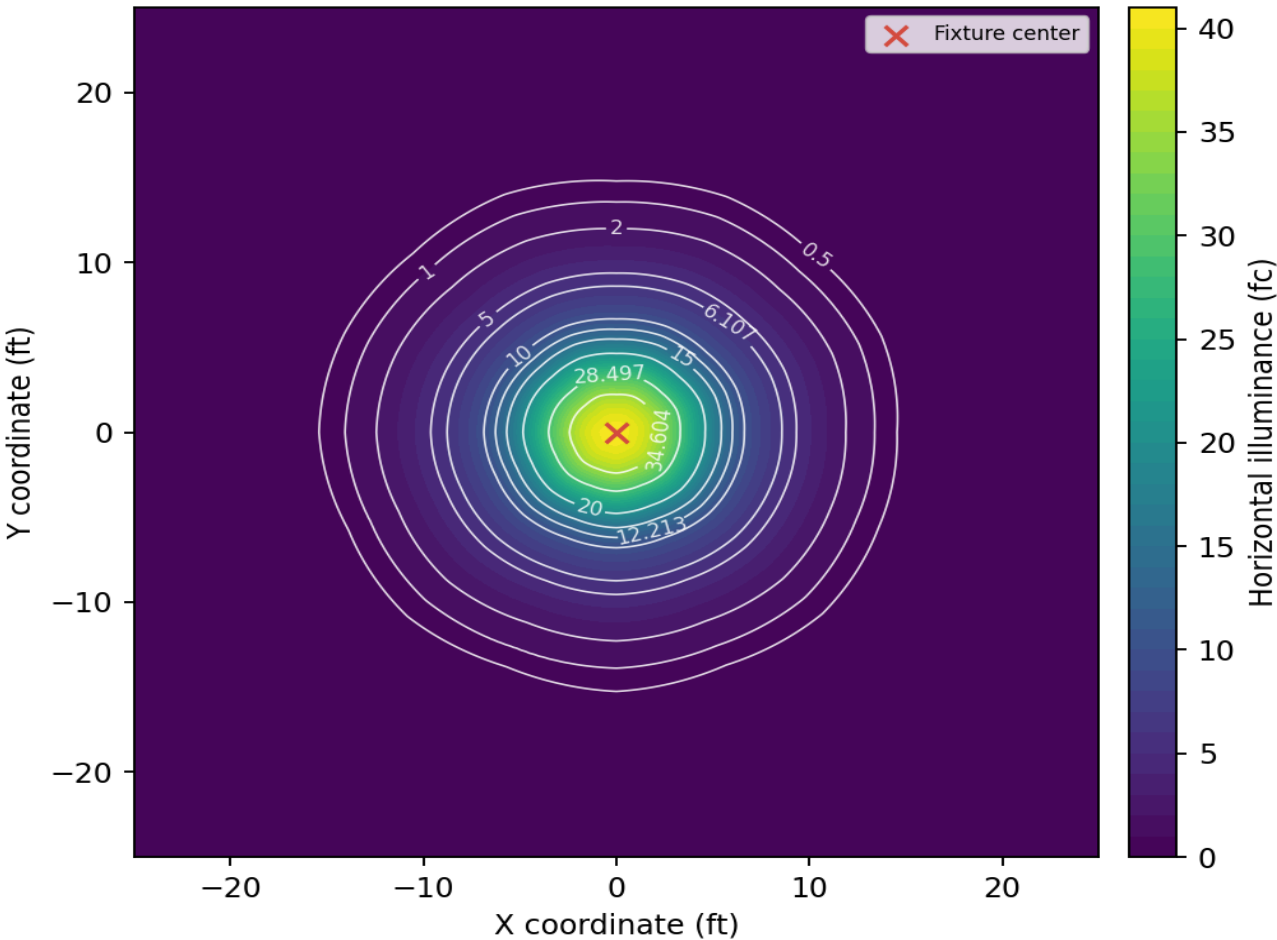

10 ft supplemental case	Result
Dense-map maximum	40.711 fc
Dense-map minimum	0.003 fc
50% footprint	9.0 x 9.0 ft
10% footprint	20.2 x 20.2 ft
LLF	0.80

Required Disclaimer

This report is a preliminary photometric analysis generated from the supplied IES photometric data using assumed installation conditions. It is intended only for conceptual planning and fixture evaluation. Actual lighting performance will vary depending on mounting height, aiming, room geometry, surface reflectance, obstructions, maintenance factors and environmental conditions. Final lighting layouts should be performed using project-specific dimensions and requirements.

Preliminary Photometric Analysis Based on Assumed Installation Conditions.