60 Watt LED Light
9-48 Volts - Black or White Finish - 6 inch Round
Instruction Manual

Familiarize yourself with all procedures outlined within this instruction sheet.

WARNING:

READ CAREFULLY BEFORE OPERATING FIXTURE. RETAIN THESE INSTRUCTIONS FOR FUTURE REFERENCE.
CRITICAL SAFETY INSTRUCTIONS:

- Never place spotlight face down when light is on. Doing so could burn/ignite surfaces such as seats, carpeting, etc. and cause major property damage. Always turn spotlight off when not in use.
- To prevent serious damage to eyesight, never look into spotlight when light is on.
- **DO NOT** shine light into the face of someone else.
- **DO NOT** touch lens of spotlight when light is on or if it was recently on. The lens will be hot.
- **DO NOT** allow children to handle or operate this spotlight.
- **DO NOT** use this product for other than its intended use.
- **DO NOT** operate in close proximity of combustible or flammable materials.
- **DO NOT** attempt to operate this spotlight if cord, plug, battery, bulb or any part of the spotlight is damaged or corroded.

The LED10W-6R is shipped with selected Beam configuration, and housing color. Images shown in this manual may vary depending upon options selected.

POWER

1. The spotlight is designed to work on 9-48V DC depending on model purchased. **PLEASE NOTE:** *There is no difference in light output between voltages.*
2. Power transformers (DCP-11-DP) can be purchased through our website to run this spotlight from household wall outlets.



A single 2-pin Deutsch IPD / LADD DT04-2P connector allows for quick connections to and from spotlight. Plug the Deutsch Connector into the back of the light, and connect other end to a compatible power source (9-48V DC). For cords supplied with flying leads, attach the positive and negative leads to their respective polarities on your power source. For cords with cigarette plugs, connect to matching receptacle.




DEUTSCH CONNECTOR

Ensure voltage is within 9-48V DC

MOUNTING

The LED10W-6R is suspended within a trunnion mount. This trunnion mount has a single adjustment bolt that can be loosened, allowing the light to be adjusted vertically, and then re-tightened to lock the light into your desired position. A single stainless steel stud protrudes from the bottom of the mount, enabling the operator to install the light using a simple through-hole mount, allowing the unit to be installed anywhere a 3/8-inch hole can be drilled.

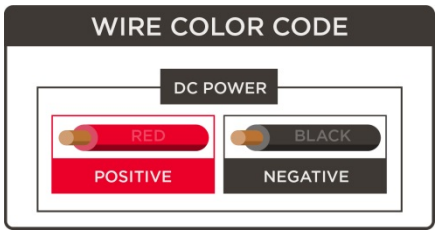

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-877-348-9680 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.