UV-C Fluorescent Light - 4 foot 2 lamp - UV-C Bulbs - NO Lens - Kills 99% of Viruses - 10' 16/3 SOOW Cord w/ General Area Cord Cap
Instruction Manual

Thank you for your purchase of the Larson Electronics IND-48-2L-BL-UVC-10C Fluorescent Fixture.

EPA Reg. No 98409-1
EPA Est. No. 98409-TX-1

IMPORTANT

READ CAREFULLY BEFORE INSTALLING THIS FIXTURE. SAVE THESE INSTRUCTIONS FOR FUTURE REFERENCE. THE IND-48-2L-BL-UVC-10C MUST BE WIRED IN ACCORDANCE WITH NATIONAL ELECTRICAL CODE AND ALL APPLICABLE LOCAL CODES. PROPER GROUNDING IS REQUIRED FOR SAFETY.

WE STRONGLY ENCOURAGE ONLY A LICENSED ELECTRICIAN INSTALL, OPERATE AND MAINTAIN THIS PRODUCT. IF YOU ARE NOT QUALIFIED OR UNFAMILIAR WITH ANY ASPECT OF THIS INSTRUCTION SHEET, CONSULT AN ELECTRICIAN. THERE ARE NO SERVICEABLE PARTS INSIDE.

WARNING: MAKE SURE POWER IS TURNED **OFF** BEFORE STARTING THE INSTALLATION OR PERFORMING ANY MAINTENANCE.

RISK OF FIRE/ELECTRIC SHOCK – DISCONNECT POWER AT BREAKER BEFORE INSTALLING OR SERVICING.
RISK OF PERSONAL INJURY – FIXTURE MAY BECOME UNSTABLE OR DAMAGED IF NOT INSTALLED PROPERLY.
RISK OF BURN – ALLOW FIXTURE TO COOL BEFORE SERVICING.
WARNING: ULTRAVIOLET LIGHT IS HARMFUL TO EYES AND SKIN. DO NOT STARE DIRECTLY INTO THE ULTRAVIOLET BEAM WITHOUT WEARING PROTECTIVE GEAR TO PROTECT EYES FROM LONG TERM DAMAGE. UNPLUG LAMP BEFORE SERVICING.

The IND-48-2L-BL-UVC-10C from Larson Electronics is a UV-C Fluorescent Light Fixture that is designed as a UV sanitation light to kill 99% of viruses, bacteria, mold, and spores. This fixture uses a special ballast and bulb combination to produce light in the ultraviolet spectrum.

Mounting

Each L bracket is cinched to the bracket mounting peg on each side of the light. The angle of the bracket is set by tightening two cap screws on either side of the bracket. The cap screws act as a set screw. The bracket itself is mounted via a single bolt hole at the top the bracket. There are two brackets, one on each end of the light. Once the brackets are mounted to a surface (ceiling, floor or wall), the light fixture can be removed from the brackets by loosening the cap screws that hold the bracket to the mounting peg. Mounting brackets are removable. A single through hole enables the operator to install the light to any surface. A sliding bracket mount is available so operators can retrofit this LED light fixture to use the per-existing mounting holes from other fluorescent fixtures.

WIRING

This UV-C fluorescent light fixture is equipped with 10 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an industrial grade cord cap for easy connection to common wall outlets. Plug options include standard 5-15 15 amp straight blade plug for 110 V wall outlets with ground, standard 5-20 20 amp straight blade plug for 110 V wall outlets with ground, standard 6-15 15 amp straight blade plug for 220-240 V wall outlets with ground, standard 6-20 20 amp straight blade plug for 220-240 V wall outlets with ground, NEMA L5-15 15 amp twist lock plug for 125V twist lock outlets, NEMA L5-20 20 amp twist lock plug for 125 V twist lock outlets, NEMA L6-15 15 amp twist lock plug for 240V twist lock outlets, NEMA L6-20 20 amp twist lock plug for 240 V twist lock outlets, British BS1363 13 amp fused 3-blade plug for United Kingdom outlets, or a two pin 16 amp rated Schuko plug with ground contact and socket for European outlets up to 250 V. Alternatively, we can provide flying leads with no plug for hard wire applications or for operators who prefer to wire in user provided cord caps. Please choose pigtail option below for flying leads with no plug.

Warning: *Check product label for correct input voltage!*

Attach supply line wires to the appropriate light fixture wires as shown in the diagram ➔

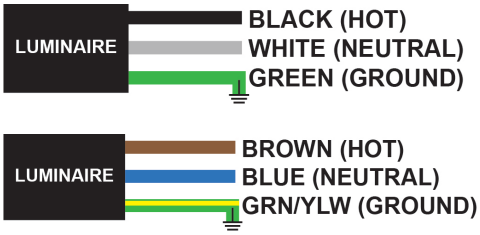

Secure each pair of wires according to the diagram. Utilize a junction box or similar device and take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. Ensure the unit is properly grounded and that wiring is done according to all local and national electrical/building codes.

Standard Cord Cap

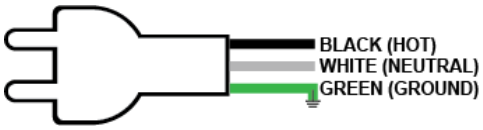

This unit comes pre-wired from factory with the selected cord cap. Take precautionary steps for weatherproofing all connections if installed in a location where water may come in contact with the unit. All outdoor installations and indoor installations near a wet location require the use of a GFCI device for safety, according to the National Electrical Code® (NEC). Ensure the unit is properly grounded.

Lamp Replacement

NOTE: Do not touch bulb with bare hands. The oil in your skin will damage the lamp. Fingerprints will result in reduced performance and significantly reduce the lifespan of the lamp unless they are removed with alcohol.

To replace a burned out or broken bulb, first make sure the bulb you are replacing it with is of the same type and rating. Also, be sure power is off at the breaker. This fixture uses 2-pin T8 style fluorescent bulbs. Remove the old bulb by rotating 1/4 turn to free the bulb from it's receptacles. Install the new bulb by sliding the pins at the ends of the lamp into the open slots in the bulb receptacles and rotate 1/4 turn to secure it in place. Restore power.

MAINTENANCE

Caution: To avoid personal injury, disconnect power to the light and allow the unit to cool down before performing maintenance.

Warning: Risk of electric shock.

1. Perform visual, mechanical and electrical inspections on a regular basis. We recommend routine checks to be made on a yearly basis. Frequency of use and environment should determine this. It is recommended to follow an Electrical Preventive Maintenance Program as described in NFPA 70B: Recommended practice for Electrical Equipment.
2. The lens should be cleaned periodically as needed to ensure continued photometric performance. Clean the lens with a damp, non-abrasive, lint-free cloth. If not sufficient, use mild soap or a liquid cleaner.
3. Inspect the cooling fins on the luminaire to ensure that they are free of any obstructions or contamination (i.e. excessive dust build-up). Clean with a non-abrasive cloth if needed.
4. Do not operate if the lens is cracked or damaged. All fasteners should be properly seated.

USE AND CARE

Unauthorized modification may impair the function and/or safety of this device and could affect the life of the equipment. Always check for damaged or worn out parts before using the device. Store it in a secure place out of the reach of children when not in use. Inspect for good working condition prior to storage and before re-use.

REPLACEMENT PARTS

The IND-48-2L-BL-UVC-10C is designed to provide years of reliable performance. Should the need for replacement parts arise, please contact Larson Electronics.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.

Ultraviolet Radiation Safety

WARNING: Do not attempt operation until you are familiar with all warnings, precautions, and procedures outlined within this instruction sheet.

OPERATION PRECAUTIONS

- **UV LIGHT WARNING:** UV-C light can cause temporary or permanent loss of vision, and temporary acute redness or ulceration (mild to severe sunburn) to exposed skin. To prevent exposure, do not operate the device in any application that allows UV-C light to be visible during operation.
- **UV LIGHT CAUTION:** UV light may degrade plastic and rubber components after longterm exposure.
- Currently, there are no work place related rules and regulations that are set by OSHA (Occupational Safety and Health Association) in regard to UVC environmental health and safety.
- **NEVER LOOK DIRECTLY AT THE BULB OR DISINFECTING TARGET ZONE**

OPERATION SAFETY

- People and animals are forbidden from being exposed to the light output of this cart for extended periods of time. Long term exposure will case damage to the eyes and skin.
- This product produces UV radiation. Anything in front of the unit will be exposed to UV radiation. Operators positioning the cart while not illuminated will not be exposed. Radiation is only emitted while the cart is turned on. Radiation will not linger in the environment when the lamps have been powered off. Safety equipment is only required when the device is in-use.
- Wear eye protective gear when operating the equipment. Polycarbonate safety glasses at minimum are required during all operations. Full frontal polycarbonate or UV-preventative face masks are recommended.
- Wear long sleeves and gloves when operating the equipment. Personal protective gear is required for long term exposure.

OPERATION SAFETY STRATEGIES

- Instruct service personnel to never look directly at UV-C light without adequate eye protection.
- Make it a policy to never enter areas being disinfected with UV lighting systems without powering the system down first. Methods of powering down depends on the options of the device purchased and may include unplugging the light source, operating the power switch to power the lamps off, or turning the system off via a wireless remote control or wireless application.
- Place warning labels near all openings/entrances to areas being disinfected with UV lighting systems. When possible, lock access doors to prevent unexpected guests from entering the area.
- Close blinds/curtains of areas being disinfected with UV lighting systems if available. If not available, block off direct access to windows/doorways to prevent access to the area. If you cannot fully block off all access (hallways with visible windows, etc) place exterior warnings in areas prior to the exposed windows (hall pedestals, banners, posters) explaining what areas are being disinfected and to not look into the room.
- Educate non service personnel about the intended operations for UV disinfecting and what signage will be posted. Instruct non service personnel to never look directly at UV-C light.
- Instruct service personnel to always wear personal protective gear (as outlined above) when they must operate in an area that has UV-C exposure, for short or long term work.

These safety precautions will help ensure service personnel are protected from accidental exposure while maintaining the effectiveness of UV-C to eradicate biological contaminants.

In the event of UV exposure, the following actions are recommended.

- See an ophthalmologist if eye damage is suspected.
- Treat skin lesions immediately.
- For severe skin lesions, seek local medical treatment and follow their recommendations for treatment.
- Follow your organization's incident reporting procedure. These often require documentation of the date and time of the incident, persons involved, equipment involved and type of injury.

THESE INSTRUCTIONS MAY NOT COVER ALL DETAILS OR VARIATIONS OF THIS PRODUCT FOR YOUR EQUIPMENT OR INSTALLATION REQUIREMENTS. SHOULD FURTHER INFORMATION NOT COVERED BY THESE INSTRUCTIONS BE REQUIRED, PLEASE CONTACT LARSON ELECTRONICS BY EMAIL AT SALES@LARSONELECTRONICS.COM OR BY PHONE AT 1-800-369-6671 FOR FURTHER ASSISTANCE.

PLEASE VISIT LARSONELECTRONICS.COM FOR **WARRANTY** AND **RETURN** INFORMATION.