

ATX-20-S-GREEN

Explosion Proof Flashlight - 20W HID Rechargeable Flashlight -Class 1, Div 1 - Green Lens

Product ID: 104922

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

ATX-20-S-GREEN

Lamp Type: XENIDE HID Bulb - Green Filter Lens

Dimensions: 11.5 "-L

Watts: 20

HID Life Expectancy: 2500 hours

Lumens: 1200

Lighting Configuration: Spot

Materials: Aluminum Housing

Weight: 1.9lbs.

LUX: At 10 ft: 5,140

LUX: At the lens: 182,000

Charging Unit: 100/240VAC 50/60Hz w/overcharge protection, LED indicator

Lens Temp: 186 f

Head Temp: 90 f

Battery: 2600mAh Lithium Ion Battery

Run-Time: 90 Minutes

Approvals

Class 1, Division 1, Groups A, B, C, D

Class 1, Division 2, Groups A, B, C, D

Class II, Division 1, Groups E, F, G;

Class II, Division 2, Groups E, F, G

IP68 Waterproof to 3 Meters

T4A Temperature Rating

Green Lens

[Hazardous Location Classifications](#)

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

E-mail: sales@larsonelectronics.com

Buy American Compliant

The Larson Electronics ATX-20-S-GREEN Hazardous Location Approved

flashlight has a Class 1 Division 1 Groups A-D approval and produces a brilliant light beam capable of reaching over 2,000 feet, making it ideal for inspection and work activities where long range is important. This explosion proof flashlight is equipped with a removable green lens, allowing operators to have a green or white flashlight depending on the operation.

This HID flashlight features a 90 minute run time on a single charge of its waterproof 2600mAh Lithium Ion battery pack. A single 20 watt short arc Xenide HID bulb powered by an internal ballast produces a 1200 lumen beam capable of reaching up to 2,500 feet. This flashlight is IP68 rated waterproof, making it capable of withstanding submersion under pressure without damage. The beam on this light is a 12° spot configuration and is not adjustable. The HID bulb in this unit provides high power and efficiency as well as a 6500k color temperature, producing a powerful beam that is a brilliant white-blue in color. The durable aluminum body has a black anodized coating to provide durable protection for this units` internal electronics and an aesthetically pleasing appearance.

This flashlight has a single push button switch that allows easy one handed operation, which combined with its rugged construction and powerful beam, makes it a competent all around flashlight capable of serving in industrial, commercial, tactical and private applications with equal effectiveness. This HID flashlight includes a hard carrying case, waterproof battery and separate battery charging stand, AC charger (US/International compatible), and Rubber lens/end cap protector.




[Click Photo to Enlarge](#)

Spot Beam (Green Lens)

Wall illuminated from 6 feet away using equipped green lens attached.

[Click Photo to Enlarge](#)

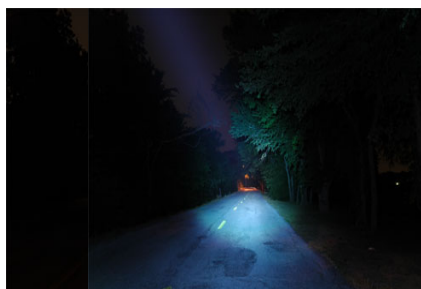

[Click Photo to Enlarge](#)

[Click Photo to Enlarge](#)

Flood Diffuser Lens (Optional)

Same wall illuminated from 6 feet using optional flood diffuser lens, [sold seperately](#).

[Click Photo to Enlarge](#)

This hazardous location approved flashlight is UL Certified:

Class 1, Division 1, Groups A, B, C, D

Class 1, Division 2, Groups A, B, C, D

Class II, Division 1, Groups E, F, G

Class II, Division 2, Groups E, F, G

A brief note about High Intensity Discharge (HID) flashlights:

Incandescent flashlights have a bulb with a filament, much like the common household light bulb. A consistent amount of current is fed to the bulb. The filament glows and light and heat are produced. The filament glows because it is a poor conductor of electricity. Eventually the filament breaks due to vibration or diminished capacity. HID flashlights have a globe of gas that contains bounded by electrodes. A spark jumps across the electrodes igniting the gas. Initially, the amount of current required to ignite the gas is higher. Once the gas is lit, much less current is required to keep the gas burning.

A device called a ballast controls the amount of current sent to the bulb. HID

flashlights use about 50% less energy than incandescent bulbs, which means longer battery life than halogen incandescent bulbs. More importantly, HID lights have no filament to break. Thus, the HID bulb life is around 2500 hours, compared to several hundred hours of the filament based incandescent bulb. The HID bulb is more efficient, so it produces much more light with less energy over a long period of time. The trade off, however, is that the ballast that sends current to the bulb is an expensive addition, increasing the cost of the flashlight. The bulb itself is also significantly more expensive than halogen bulbs.)

Frequently Asked Questions (FAQ)



ATX-20-S-GREEN

Product ID: 104922

Harmonized System (HS) Code: 8512.20.2080

Export Control Classification Number (ECCN): EAR99

Links (Click on the below items to view):

- [MSDS \(Material Safety Data Sheet\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)