

EPL-QP-1X150RT-140DB-250

150 Watt Explosion Proof LED Light Tower - Quadpod Mount - C1D1 - 250' Cord w/ EXP Plug

Product ID: 104970

Please see last page for supporting documentation for this product(certificates, CAD files & drawings, IES files, wiring diagrams, etc).



Larson Electronics LLC manufactures a wide variety of products, including custom built to spec designs. The pictures displayed for this unit are a general representation of form factor for the product line and may not accurately represent this exact configuration in every detail due to custom builds and changes between similar products in our standard catalog. The specifics for this configuration are listed in the specification table and supporting documentation (CAD files, Dimensional Drawing, Name Plate Diagram, Wiring Diagram, etc.). This means that specific details (receptacles, plugs, wires, connections, mounting brackets, external finishes, etc.) may not be accurately represented in images vs specifications. Please review specifications and do not order based solely on images.

EPL-QP-1X150RT-140DB-250 Explosion Proof LED Quadpod

Listing: United States & Canada

Lamp Type: Cree LED

Dimensions: Light Head - 14"W x 16"H x 5"D - 7' to 12' Extendible Tower

Weight: 50 lbs

Voltage: 120-277V AC, 50/60Hz

Total Watts: 150 Watts

Total Lumens: 21,000

Efficiency: 140 Lm/W

Beam Angle: 60°, 125°, or 140°

Lighting Configuration: Flood Pattern

LED Lamp Life Expectancy: 60,000 Hours

Color Temp: 5600K, 5000K, 4500K, 4000K, 3500K, 3000K, 2700K, or 6500K

Color Rendering Index: >75 CRI

Power Factor: 0.992

Mounting: Non-Sparking Wheeled Aluminum Quadpod

Wiring: 250' 16/3 SOOW Cord w/ Explosion Proof Cord Cap

Cord Cap Options: 5-15P, 5-20P or 6-20P

Ratings/Approvals

Class I Divisions 1 & 2, Groups C & D

Class II, Divisions 1 & 2, Groups E, F, & G

T5 Temperature Rating

Certified to UL844 and C22.2 Standards

Paint Spray Booth Approved

IP67 Rated Waterproof

Multiple Driver Banks

80% Lumen Retention after 60,000 Hours

Equipped with Choice of Explosion Proof Cord Cap

LEL Approved

Wheeled Adjustable Tower 7 - 12 Feet

Special Orders - Special Requirements

Contact us for special requirements

Toll Free: 1-800-369-6671

Intl: 1-903-270-1187

Fax: 1-903-498-3364

E-mail: sales@larsonelectronics.com

Made in the USA

The EPL-QP-1X150RT-140DB-250 from Larson Electronics is a Quadpod Mounted Explosion Proof LED Light Tower that produces 21,000 lumens of light capable of illuminating an area 9,000 square feet in size. This adjustable Cree LED light tower is designed for portability and durable operation and

ideal for use in demanding conditions.

PLEASE NOTE: ANY FREE SHIPPING OFFERS DO NOT APPLY TO LIGHT MASTS, LIGHT TOWERS, OR QUADPODS

The EPL-QP-1X150RT-140DB-250 is a quadpod mounted explosion proof LED lighting system and provides 9,000 square feet of work area coverage with 21,000 lumens of light output. This portable LED light tower has a removable LED light head mounted on top of a four leg durable non-sparking aluminum quadpod equipped with wheels for easy positioning of the unit from one area of the workspace to another. The LED light head on this unit produces a wide flood pattern of light that is ideal for illuminating large workspaces and jobsites. This light is designed for heavy duty use in demanding conditions including emergency services, mining, construction, marine, and industrial operations where durability and reliability is critical.

This portable LED light is comprised of an adjustable LED light head mounted atop a four leg quadpod fabricated from non-sparking powder coated aluminum. This adjustable and collapsible quadpod can be extended to twelve feet, collapsed to seven feet, and includes solid wheels allow the operator to tilt the unit back and simply roll the entire assembly to a new location when fully deployed. The LED light fixture assembly can be removed by releasing the hand knob and sliding the light and mounting bracket off of the center support while the legs can be collapsed, aiding in deployment, storage and transport. The lamp can be easily adjusted vertically and locked into position.



[Click Photo to Enlarge](#)



[Click Photo to Enlarge](#)




[Click Photo to Enlarge](#)

LED Benefits: Unlike gas burning and arc type lamps that have glass bulbs, LEDs have no filaments or fragile housings to break during operation and/or transportation. Instead of heating a small filament or using a combination of gases to produce light, light emitting diodes (LEDs) use semi-conductive materials that illuminate when electric current is applied, providing instant illumination with no warm up or cool down time before re-striking. Because there is no warm up period, this light can be cycled on and off with no reduction in lamp life.

LED lights run at significantly cooler temperatures than traditional metal halide and high pressure sodium lights and contain no harmful gases, vapors, or mercury, making them both safer and more energy efficient. No extra energy is wasted in cooling enclosed work areas due to external heat emissions from bulb type lights, and the operator risks associated with traditional lighting methods, such as accidental burns and exposure to hazardous substances contained in the glass bulbs, are eliminated. In addition, LEDs are also safer for the environment as they are 100% recyclable, which eliminates the need for costly special disposal services required with traditional gas burning and arc type lamps.

The explosion proof LED light fixture features multiple LED drivers which helps to increase the operational life of the fixture. With traditional LED lights, in the event an LED array or driver fails, the entire fixture no longer illuminates. This new series of LED lamps contains twelve individual LED boards configured in a series of banks. Each bank contains two LED boards with an individual driver. In the event of a driver failure, only one bank of LEDs will be effected while the other banks will continue to operate. In the event that of an LED failure, the mating LED will continue to operate.

[Click Photos to Enlarge](#)

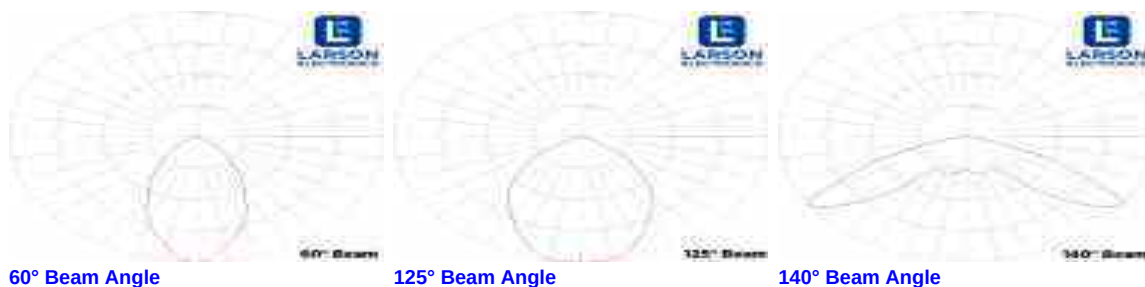

Beam Angles: When used as a portable lighting solution, the varying beam angles are each individually ideal for several environments. The 60° beam provides the most intense beam of the three options. It is perfect for narrow, confined spaces and is ideally suited for tank cleaning purposes. It offers focused light to provide ample illumination to tight work spaces and other environments. The 125° beam offers a more diffused source of light that is also less intense in brightness. It is a great general area work light and performs well when used for outdoor illumination. The 140° beam offers a very wide lighting pattern and is ideal for situations where lighting distance is not a concern, but illumination of a wider area and even light distribution is. The 140° beam is great for situations that call for working in close proximity to lights such as in a paint booth.

[Click Photos to Enlarge](#)



Wiring & Plug: This explosion proof flood light is equipped with 250 feet of 16/3 chemical and abrasion resistant SOOW cord that is fitted with an explosion proof cord cap for easy connection to explosion proof outlets. Plug options include a 5-15 15 amp straight blade plug for use with 120V explosion proof outlets, a 5-20 20 amp straight blade plug for use with 120V explosion proof outlets, or a 6-20 20 amp straight blade plug for use with 220-240V explosion proof outlets. ****PLEASE NOTE** voltage ratings on plugs and outlets are MAXIMUM voltage. For low voltage applications, proper voltage must be applied to the outlet or damage to the light fixture will occur.**

The easy to collapse design of this Class I Division 1 LED work light allows Larson Electronics to avoid pallet freight charges when shipping and deliver these units via UPS next day air service, which in turn improves delivery time and reduces the cost to buyers. This unit is universal voltage capable and configured to operate on 120-277 Volts AC, 50/60 Hz. This LED light head retains 80% of its lumen output after 50,000 hours of use, far longer than incandescent or fluorescent lamps. The LED light head on this unit is small enough to allow it to fit through most standard size manholes and entry points. The LED light head can also be removed from the quadpod, the tower collapsed and the entire assembly passed through a manhole and reassembled once inside.

The LED light head on this tower contains twelve 12.5 watt LEDs producing 140 lumens each. These LEDs are arranged in rows and paired with high purity optics to produce 21,000 lumens and a 60 degree flood beam while only drawing 1.25 amps on 120V, making these units ideal for use as highly efficient yet powerful work and area lights. The EPL-QP-1X150RT-140DB-250 hazardous location LED light is an ideal replacement for fragile and hot running 400 watt metal halide floodlights.

At Larson Electronics, we do more than meet your lighting needs. We also provide

replacement, retrofit, and upgrade parts as well as industrial grade power accessories. Our craftsmen can custom build any lighting system and/or accessories to fit the unique demands of your operation. A commitment to honesty, quality, and dependability has made Larson Electronics a leader in the lighting and electronics business since 1973. Contact us today at 800-369-6671 or message sales@larsonelectronics.com for more information about our custom options tailored to meet your specific industry needs.

Made in USA Quality

1. Approved Class I Divs 1-2 Class II Divs 1-2
2. LED lamp head requires no lamping and simply slides on the quadpod and is locked into place with a hand tightened set screw.
3. Quadpod constructed of corrosion resistant, non-sparking aluminum with powder coated finish.
4. No ballast box. No ballast to replace.
5. Extreme long life LEDs reduce maintenance and replacement costs.
6. Solid rubber tires. No flats or tube replacements.
7. 25 peel off mylar overspray lamp protectors ship with the unit.
8. 21,000 Lumens produced from only 150 watts.
9. Mercury free shock proof LED lamp light head.

Superior LED Benefits

1. 50,000+ hour lifespan.
2. Can SAVE 50% or more on energy.
3. 100% recyclable.
4. No toxins-lead, mercury.
5. No UV light, infrared radiation or CO2 emissions.
6. Bright, even light maintains consistent color over time.
7. Instant on/off – No flickering, delays or buzzing.
8. Very good color rendering.
9. Vibration/impact resistant.
10. Significantly cooler operation.
11. Less frequent outages, higher output improves workplace safety.

Frequently Asked Questions (FAQ)









EPL-QP-1X150RT-140DB-250

Product ID: 104970

Export Control Classification Number (ECCN): EAR99

Options:

EPL-QP-1X150RT-140DB-250-Beam Angle-Color Temp

Example: EPL-QP-1X150RT-140DB-250-60B-56K

Beam Angle	
60°	-60B
125°	-125B
140°	-140B

Color Temp	
5600K	-56K
5000K	-50K
4500K	-45K
4000K	-40K
3500K	-35K
3000K	-30K
2700K	-27K
6500K	-65K

Links (Click on the below items to view):

- [Beam Information \(Coverage, Datafile\)](#)
- [Canadian CEC Certificate \(Commonly referred to as CSA Certificate\)](#)
- [CE Certificate](#)
- [Certificate 1, Misc](#)
- [Certificate 2, Misc](#)
- [Certificate 3, Misc](#)
- [IES \(Photometric File\)](#)
- [MSDS \(Material Safety Data Sheet\)](#)
- [Operations Manual](#)
- [RoHS Certificate \(Restriction of Hazardous Substances\)](#)
- [USA NEC Certificate \(Commonly referred to as UL Certificate\)](#)
- [Wiring Diagram \(Online\)](#)
- [HigResPic1](#)
- [HigResPic2](#)
- [HigResPic3](#)
- [HigResPic4](#)
- [HigResPic5](#)
- [HigResPic6](#)
- [HigResPic7](#)
- [Video1](#)
- [Video2](#)
- [Video3](#)
- [ISO 9001 Certification](#)
- [Business Certificate](#)
- [Shipping Time Map](#)